

For detection: Non Seal Type Switches

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches


Product Catalog

**IN Your
Future**

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches


ORDERING INFORMATION (PART NO.)

FS switches (In-line terminal type)

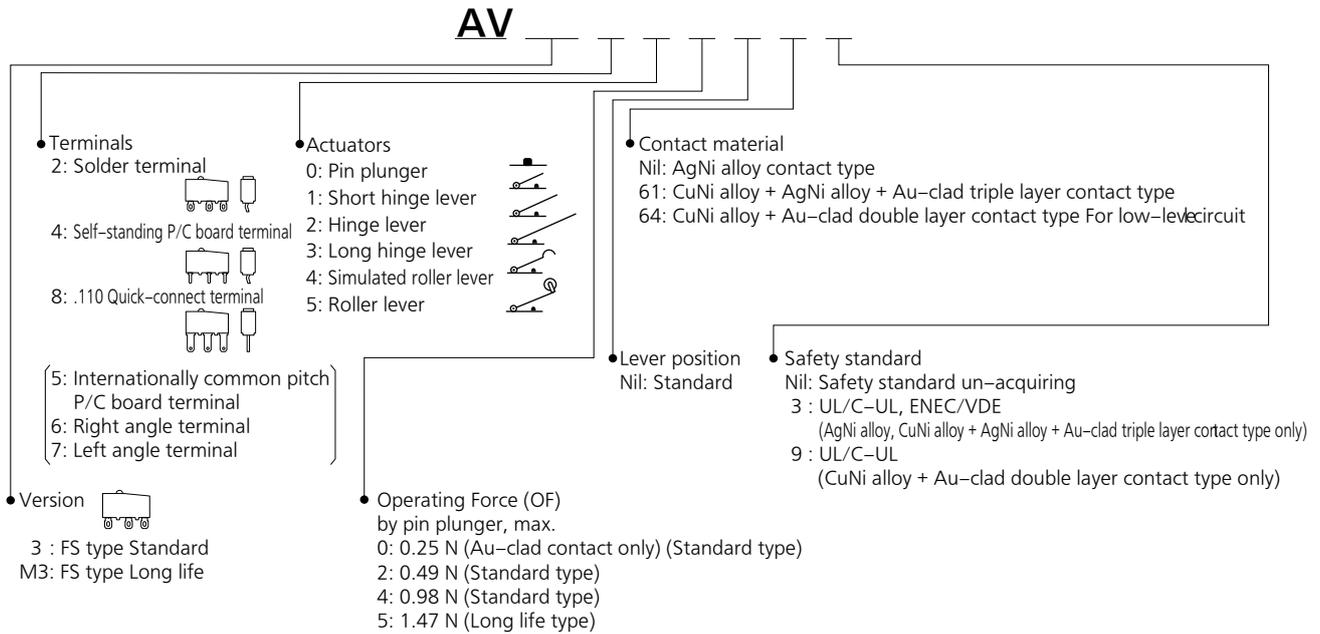

Note) 1: Since the switches of terminal of an asterisk [*] will be manufactured after an order receipt, please contact our sales representative.
 2: When ordering, please add "-A" at the end of the part number

FS-T switches (Cross-line terminal type)

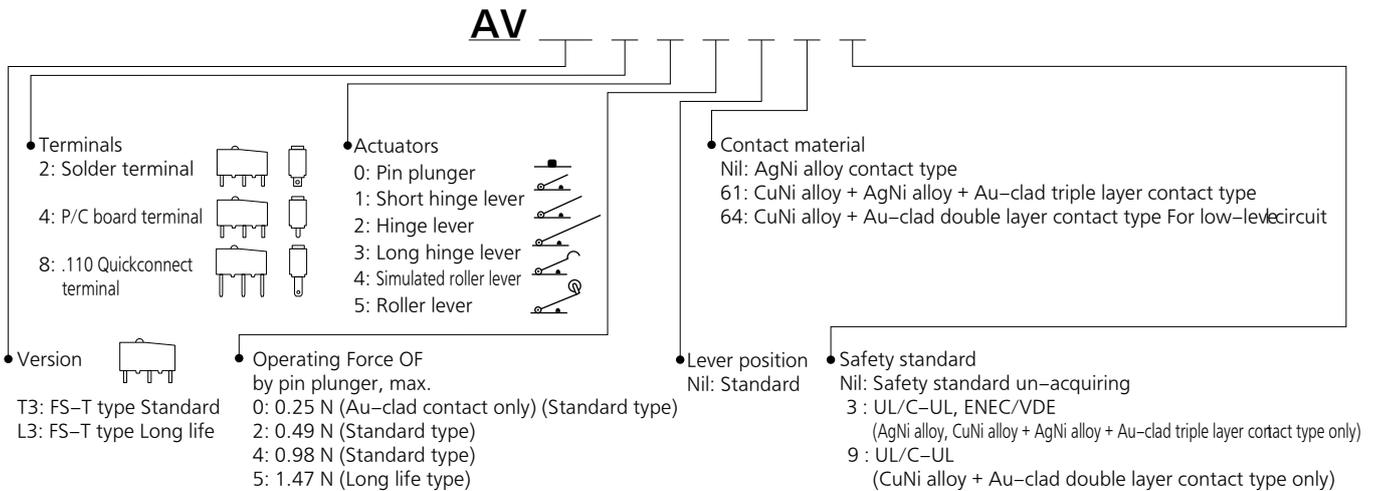

Note) When ordering, please add "-A" at the end of the part number.

TYPES

■ FS type, Standard version (In-line terminal type)

1) AgNi alloy contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.49 N | AV3202 | AV3402 | AV3802 |
| | 0.98 N | AV3204 | AV3404 | AV3804 |
| Short hinge lever | 0.20 N | AV3212 | AV3412 | AV3812 |
| | 0.39 N | AV3214 | AV3414 | AV3814 |
| Hinge lever | 0.16 N | AV3222 | AV3422 | AV3822 |
| | 0.34 N | AV3224 | AV3424 | AV3824 |
| Long hinge lever | 0.12 N | AV3232 | AV3432 | AV3832 |
| | 0.25 N | AV3234 | AV3434 | AV3834 |
| Simulated roller lever | 0.16 N | AV3242 | AV3442 | AV3842 |
| | 0.34 N | AV3244 | AV3444 | AV3844 |
| Roller lever | 0.20 N | AV3252 | AV3452 | AV3852 |
| | 0.39 N | AV3254 | AV3454 | AV3854 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is black

2) CuNi alloy + AgNi alloy + Au-clad triple layer contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.25 N | AV320061 | AV340061 | AV380061 |
| | 0.49 N | AV320261 | AV340261 | AV380261 |
| | 0.98 N | AV320461 | AV340461 | AV380461 |
| Short hinge lever | 0.098 N | AV321061 | AV341061 | AV381061 |
| | 0.20 N | AV321261 | AV341261 | AV381261 |
| | 0.39 N | AV321461 | AV341461 | AV381461 |
| Hinge lever | 0.078 N | AV322061 | AV342061 | AV382061 |
| | 0.16 N | AV322261 | AV342261 | AV382261 |
| | 0.34 N | AV322461 | AV342461 | AV382461 |
| Long hinge lever | 0.12 N | AV323261 | AV343261 | AV383261 |
| | 0.25 N | AV323461 | AV343461 | AV383461 |
| Simulated roller lever | 0.16 N | AV324261 | AV344261 | AV384261 |
| | 0.34 N | AV324461 | AV344461 | AV384461 |
| Roller lever | 0.20 N | AV325261 | AV345261 | AV385261 |
| | 0.39 N | AV325461 | AV345461 | AV385461 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is red

3) CuNi alloy + Au-clad double layer contact type, for low-level load

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.25 N | AV320064 | AV340064 | AV380064 |
| | 0.49 N | AV320264 | AV340264 | AV380264 |
| | 0.98 N | AV320464 | AV340464 | AV380464 |
| Short hinge lever | 0.098 N | AV321064 | AV341064 | AV381064 |
| | 0.20 N | AV321264 | AV341264 | AV381264 |
| | 0.39 N | AV321464 | AV341464 | AV381464 |
| Hinge lever | 0.078 N | AV322064 | AV342064 | AV382064 |
| | 0.16 N | AV322264 | AV342264 | AV382264 |
| | 0.34 N | AV322464 | AV342464 | AV382464 |
| Long hinge lever | 0.12 N | AV323264 | AV343264 | AV383264 |
| | 0.25 N | AV323464 | AV343464 | AV383464 |
| Simulated roller lever | 0.16 N | AV324264 | AV344264 | AV384264 |
| | 0.34 N | AV324464 | AV344464 | AV384464 |
| Roller lever | 0.20 N | AV325264 | AV345264 | AV385264 |
| | 0.39 N | AV325464 | AV345464 | AV385464 |

Notes: 1. Safety standard certified type is also available. When ordering, please add suffix "9" to the part number.
2. Other types of terminals are also available. When ordering, please refer to "ORDERING INFORMATION"
3. Color of plunger is green

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches

■FS-T type Standard version (Cross-line terminal type)

1) AgNi alloy contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.49 N | AVT3202 | AVT3402 | AVT3802 |
| | 0.98 N | AVT3204 | AVT3404 | AVT3804 |
| Short hinge lever | 0.20 N | AVT3212 | AVT3412 | AVT3812 |
| | 0.39 N | AVT3214 | AVT3414 | AVT3814 |
| Hinge lever | 0.16 N | AVT3222 | AVT3422 | AVT3822 |
| | 0.34 N | AVT3224 | AVT3424 | AVT3824 |
| Long hinge lever | 0.12 N | AVT3232 | AVT3432 | AVT3832 |
| | 0.25 N | AVT3234 | AVT3434 | AVT3834 |
| Simulated roller lever | 0.16 N | AVT3242 | AVT3442 | AVT3842 |
| | 0.34 N | AVT3244 | AVT3444 | AVT3844 |
| Roller lever | 0.20 N | AVT3252 | AVT3452 | AVT3852 |
| | 0.39 N | AVT3254 | AVT3454 | AVT3854 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is black

2) CuNi alloy + AgNi alloy + Au-clad triple layer contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.25 N | AVT320061 | AVT340061 | AVT380061 |
| | 0.49 N | AVT320261 | AVT340261 | AVT380261 |
| | 0.98 N | AVT320461 | AVT340461 | AVT380461 |
| Short hinge lever | 0.098 N | AVT321061 | AVT341061 | AVT381061 |
| | 0.20 N | AVT321261 | AVT341261 | AVT381261 |
| | 0.39 N | AVT321461 | AVT341461 | AVT381461 |
| Hinge lever | 0.078 N | AVT322061 | AVT342061 | AVT382061 |
| | 0.16 N | AVT322261 | AVT342261 | AVT382261 |
| | 0.34 N | AVT322461 | AVT342461 | AVT382461 |
| Long hinge lever | 0.12 N | AVT323261 | AVT343261 | AVT383261 |
| | 0.25 N | AVT323461 | AVT343461 | AVT383461 |
| Simulated roller lever | 0.16 N | AVT324261 | AVT344261 | AVT384261 |
| | 0.34 N | AVT324461 | AVT344461 | AVT384461 |
| Roller lever | 0.20 N | AVT325261 | AVT345261 | AVT385261 |
| | 0.39 N | AVT325461 | AVT345461 | AVT385461 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is red

3) CuNi alloy + Au-clad double layer contact type, for low-level load

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 0.25 N | AVT320064 | AVT340064 | AVT380064 |
| | 0.49 N | AVT320264 | AVT340264 | AVT380264 |
| | 0.98 N | AVT320464 | AVT340464 | AVT380464 |
| Short hinge lever | 0.098 N | AVT321064 | AVT341064 | AVT381064 |
| | 0.20 N | AVT321264 | AVT341264 | AVT381264 |
| | 0.39 N | AVT321464 | AVT341464 | AVT381464 |
| Hinge lever | 0.078 N | AVT322064 | AVT342064 | AVT382064 |
| | 0.16 N | AVT322264 | AVT342264 | AVT382264 |
| | 0.34 N | AVT322464 | AVT342464 | AVT382464 |
| Long hinge lever | 0.12 N | AVT323264 | AVT343264 | AVT383264 |
| | 0.25 N | AVT323464 | AVT343464 | AVT383464 |
| Simulated roller lever | 0.16 N | AVT324264 | AVT344264 | AVT384264 |
| | 0.34 N | AVT324464 | AVT344464 | AVT384464 |
| Roller lever | 0.20 N | AVT325264 | AVT345264 | AVT385264 |
| | 0.39 N | AVT325464 | AVT345464 | AVT385464 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "9" to the part number.
2. Color of plunger is green

■FS type, Long life version (In-line terminal type)

1) AgNi alloy contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVM3205 | AVM3405 | AVM3805 |
| Short hinge lever | 0.59 N | AVM3215 | AVM3415 | AVM3815 |
| Hinge lever | 0.54 N | AVM3225 | AVM3425 | AVM3825 |
| Long hinge lever | 0.44 N | AVM3235 | AVM3435 | AVM3835 |
| Simulated roller lever | 0.54 N | AVM3245 | AVM3445 | AVM3845 |
| Roller lever | 0.59 N | AVM3255 | AVM3455 | AVM3855 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is black

2) CuNi alloy + AgNi alloy + Au-clad triple layer contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVM320561 | AVM340561 | AVM380561 |
| Short hinge lever | 0.59 N | AVM321561 | AVM341561 | AVM381561 |
| Hinge lever | 0.54 N | AVM322561 | AVM342561 | AVM382561 |
| Long hinge lever | 0.44 N | AVM323561 | AVM343561 | AVM383561 |
| Simulated roller lever | 0.54 N | AVM324561 | AVM344561 | AVM384561 |
| Roller lever | 0.59 N | AVM325561 | AVM345561 | AVM385561 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is red

3) CuNi alloy + Au-clad double layer contact type, for low-level load

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|----------------------------------|--------------------|
| | | Solder terminal | Self-standing P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVM320564 | AVM340564 | AVM380564 |
| Short hinge lever | 0.59 N | AVM321564 | AVM341564 | AVM381564 |
| Hinge lever | 0.54 N | AVM322564 | AVM342564 | AVM382564 |
| Long hinge lever | 0.44 N | AVM323564 | AVM343564 | AVM383564 |
| Simulated roller lever | 0.54 N | AVM324564 | AVM344564 | AVM384564 |
| Roller lever | 0.59 N | AVM325564 | AVM345564 | AVM385564 |

Notes: 1. Safety standard certified type is also available. When ordering, please add suffix "9" to the part number.
2. Other types of terminals are also available. When ordering, please refer to "ORDERING INFORMATION"
3. Color of plunger is green

■FS-T Long life version (Cross-line terminal type)

1) AgNi alloy contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVL3205 | AVL3405 | AVL3805 |
| Short hinge lever | 0.59 N | AVL3215 | AVL3415 | AVL3815 |
| Hinge lever | 0.54 N | AVL3225 | AVL3425 | AVL3825 |
| Long hinge lever | 0.44 N | AVL3235 | AVL3435 | AVL3835 |
| Simulated roller lever | 0.54 N | AVL3245 | AVL3445 | AVL3845 |
| Roller lever | 0.59 N | AVL3255 | AVL3455 | AVL3855 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is black

2) CuNi alloy + AgNi alloy + Au-clad triple layer contact type

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVL320561 | AVL340561 | AVL380561 |
| Short hinge lever | 0.59 N | AVL321561 | AVL341561 | AVL381561 |
| Hinge lever | 0.54 N | AVL322561 | AVL342561 | AVL382561 |
| Long hinge lever | 0.44 N | AVL323561 | AVL343561 | AVL383561 |
| Simulated roller lever | 0.54 N | AVL324561 | AVL344561 | AVL384561 |
| Roller lever | 0.59 N | AVL325561 | AVL345561 | AVL385561 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "3" to the part number.
2. Color of plunger is red

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches

3) CuNi alloy + Au-clad double layer contact type, for low-level load

| Actuator | Operating Force (OF) Max. | Part No. | | |
|------------------------|---------------------------|-----------------|--------------------|--------------------|
| | | Solder terminal | P/C board terminal | .110 Quick-connect |
| Pin plunger | 1.47 N | AVL320564 | AVL340564 | AVL380564 |
| Short hinge lever | 0.59 N | AVL321564 | AVL341564 | AVL381564 |
| Hinge lever | 0.54 N | AVL322564 | AVL342564 | AVL382564 |
| Long hinge lever | 0.44 N | AVL323564 | AVL343564 | AVL383564 |
| Simulated roller lever | 0.54 N | AVL324564 | AVL344564 | AVL384564 |
| Roller lever | 0.59 N | AVL325564 | AVL345564 | AVL385564 |

Note: 1. Safety standard certified type is also available. When ordering, please add suffix "9" to the part number.
2. Color of plunger is green

RATING

Contact rating

| Type | Standard version | | | | Long life version | | | |
|---------------------------------|---------------------------|------------------------------------|---------------------------|--|---------------------------|------------------------------------|---------------------------|--|
| | AgNi alloy contact type | | Au-clad contact type | | AgNi alloy contact type | | Au-clad contact type | |
| Contact specification | | | Triple layer contact type | Double layer contact type For low-level load | | | Triple layer contact type | Double layer contact type For low-level load |
| Type of load Contact voltage | Resistive load (cosφ ≐ 1) | Inductive load (cosφ ≐ 0.6 to 0.7) | Resistive load (cosφ ≐ 1) | Inductive load (cosφ ≐ 1) | Resistive load (cosφ ≐ 1) | Inductive load (cosφ ≐ 0.6 to 0.7) | Resistive load (cosφ ≐ 1) | Inductive load (cosφ ≐ 1) |
| 125 V AC | 3 A | 2 A | 0.1 A | — | 5 A | 3 A | 0.1 A | — |
| 250 V AC | 3 A | 2 A | 0.1 A | — | 5 A | 3 A | 0.1 A | — |
| 30 V DC | 3 A | 2 A | 0.1 A | 0.1 A | 5 A | 3 A | 0.1 A | 0.1 A |
| 125 V DC | 0.4 A | 0.05 A | — | — | 0.4 A | 0.05 A | — | — |

Note: Time constant shall be less than 7 msec. for DC inductive loads.

Low-level circuit rating (Au-clad contact type)

| Rated voltage | Resistive load |
|---------------|----------------|
| 6 V DC | 5 mA |
| 12 V DC | 2 mA |
| 24 V DC | 1 mA |

Specifications

| Item | | Standard version | | Long life version | | Test condition |
|---|---|--|--|--|---------------------------|---|
| | | AgNi alloy contact type | Au-clad contact type | AgNi alloy contact type | Au-clad contact type | |
| Expected life | Mechanical life | Min. 5×10^5 (OTmax.) | | Min. 3×10^7 (OT: Specified value) Min. 10^7 (OTmax.) | | at 60 cpm |
| | Electrical life | Min. 5×10^4 | Min. 2×10^5 | Min. 5×10^4 | Min. 2×10^5 | at 20 cpm, at rated load, OT max. |
| Insulation resistance | | Min. 100 MΩ | | | | at 500 V DC |
| Dielectric strength | Between non-continuous terminals | 1,000 Vms | | | | |
| | Between each terminal and other exposed metal parts | 1,500 Vms | | | | |
| | Between each terminal and ground | 1,500 Vms | | | | |
| Contact resistance (Initial) | | Max. 50 mΩ | Max. 100 mΩ | Max. 50 mΩ | Max. 100 mΩ | Ag alloy contact type: by voltage drop 1 A, 6 to 8 V DC Au-clad contact type: by voltage drop 0.1 A, 6 to 8 V DC |
| Vibration resistance (Pin plunger type) | | 10 to 55 Hz at single amplitude of 0.75 mm | | | | Contact opening: Max. 1 msec |
| Shock resistance (Pin plunger type) | | 294 m/s ² min. (OF 0.98 N type) 147 m/s ² min. (OF 0.49 N type) | 294 m/s ² min. (OF 0.98 N type) 147 m/s ² min. (OF 0.49 N type) 49 m/s ² min. (OF 0.25 N type) | Min. 294 m/s ² | Min. 294 m/s ² | Contact opening: 1 msec max. |
| Allowable operating speed (no load) | | 0.1 to 1,000 mm/sec | | | | |
| Max. operating cycle rate (no load) | | 300 cpm | | | | |
| Ambient temperature | | -25 to +85°C | | | | no freezing and condensing |
| Unit weight | | Approx. 2 g | | | | |
| Protection grade | | IP40 | | | | |

Note: Test conditions and judgement are complying with "NECA C 4505".

Operating characteristics

1) Pin plunger

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|---|
| 0 | 0.25 N | 0.020 N | 0.6 mm | 0.1 mm | 0.4 mm | Distance from mounting holes: 8.4±0.3 mm Distance from stand-off: FS 11.8±0.4 mm FS-T 11.7±0.4 mm |
| 2 | 0.49 N | 0.074 N | | | | |
| 4 | 0.98 N | 0.15 N | | | | |
| 5 | 1.47 N | 0.20 N | | | | |

2) Short hinge lever

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|---|
| 0 | 0.098 N | 0.004 N | 2.5 mm | 0.5 mm | 0.8 mm | Distance from mounting holes: 8.8±0.8 mm Distance from stand-off: FS 12.2±0.9 mm FS-T 12.1±0.9 mm |
| 2 | 0.20 N | 0.017 N | | | | |
| 4 | 0.39 N | 0.034 N | | | | |
| 5 | 0.59 N | 0.039 N | | | | |

3) Hinge lever

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|---|
| 0 | 0.078 N | 0.003 N | 2.8 mm | 0.8 mm | 1.2 mm | Distance from mounting holes: 8.8±0.8 mm Distance from stand-off: FS 12.2±0.9 mm FS-T 12.1±0.9 mm |
| 2 | 0.16 N | 0.015 N | | | | |
| 4 | 0.34 N | 0.029 N | | | | |
| 5 | 0.54 N | 0.034 N | | | | |

4) Long hinge lever

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|---|
| 0 | — | — | 3.5 mm | 1.0 mm | 1.6 mm | Distance from mounting holes: 8.8±1.2 mm Distance from stand-off: FS 12.2±1.3 mm FS-T 12.1±1.3 mm |
| 2 | 0.12 N | 0.012 N | | | | |
| 4 | 0.25 N | 0.025 N | | | | |
| 5 | 0.44 N | 0.029 N | | | | |

5) Simulated roller lever

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|---|
| 0 | — | — | 2.8 mm | 0.8 mm | 1.2 mm | Distance from mounting holes: 11.65±0.8 mm Distance from stand-off: FS 15.05±0.9 mm FS-T 14.95±0.9 mm |
| 2 | 0.16 N | 0.015 N | | | | |
| 4 | 0.34 N | 0.029 N | | | | |
| 5 | 0.54 N | 0.034 N | | | | |


6) Roller lever

| 4th digit number of Part No. | Operating Force (OF) Max. | Release Force (RF) Min. | Pretravel (PT) Max. | Movement Differential (MD) Max. | Overtravel (OT) Min. | Operating Position (OP) |
|------------------------------|---------------------------|-------------------------|---------------------|---------------------------------|----------------------|--|
| 0 | — | — | 2.5 mm | 0.5 mm | 0.8 mm | Distance from mounting holes: 14.5±0.8 mm Distance from stand-off: FS 17.9±0.9 mm FS-T 17.8±0.9 mm |
| 2 | 0.20 N | 0.017 N | | | | |
| 4 | 0.39 N | 0.034 N | | | | |
| 5 | 0.59 N | 0.039 N | | | | |

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches

DATA

Contact material reference chart classified by load voltage & current

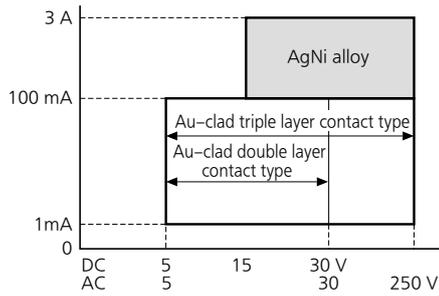


Note) If the contact is being used in the constant low-level circuit load range, the Au-clad double layer contact type is recommended. If there is a danger of the current being less than 0.5 A, for instance if the contact is being turned on and off, the Au-clad triple layer contact type is recommended.
The diagram above is intended as a reference. Please use the product within the rated voltage and current.

CONSTRUCTION


Standard version (FS type)

- As for FS-T switches, the terminals are the different shape.




Long life version (FS type)

- As for FS-T switches, the terminals are the different shape.



CONTACT FORM



DIMENSIONS

CAD The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Unit: mm


FS switches (In-line terminal type)

CAD


- Self-standing P/C board terminal
- Pin plunger



External dimensions

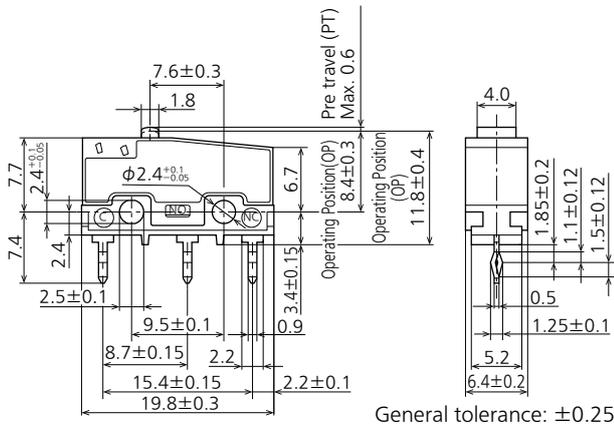

P/C board pattern




| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 0.6 mm | |
| Movement Differential (MD) Max. | 0.1 mm | |
| Overtravel (OT) Min. | 0.4 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.4±0.3 mm |
| | Distance from stand-off | 11.8±0.4 mm |

● Short hinge lever



External dimensions

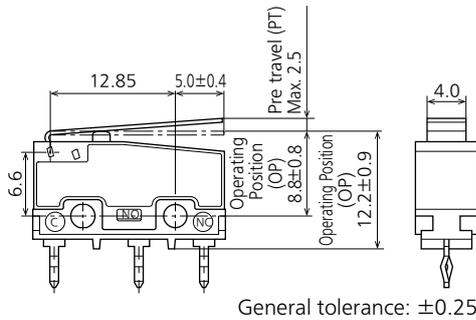


| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 2.5 mm | |
| Movement Differential (MD) Max. | 0.5 mm | |
| Overtravel (OT) Min. | 0.8 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±0.8 mm |
| | Distance from stand-off | 12.2±0.9 mm |

● Hinge lever



External dimensions

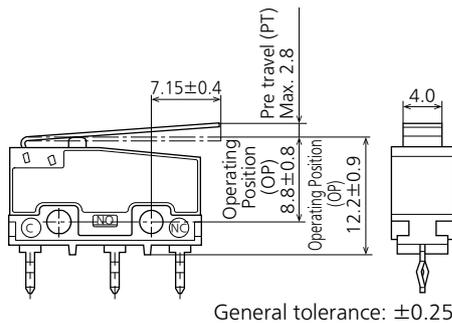


| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 2.8 mm | |
| Movement Differential (MD) Max. | 0.8 mm | |
| Overtravel (OT) Min. | 1.2 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±0.8 mm |
| | Distance from stand-off | 12.2±0.9 mm |

● Long hinge lever



External dimensions

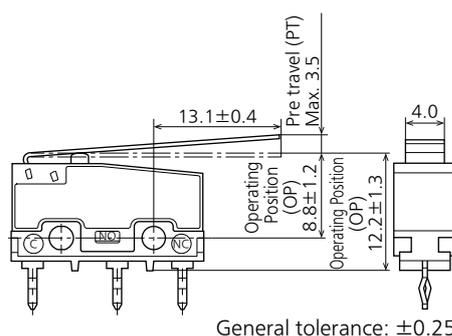


| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 3.5 mm | |
| Movement Differential (MD) Max. | 1.0 mm | |
| Overtravel (OT) Min. | 1.6 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±1.2 mm |
| | Distance from stand-off | 12.2±1.3 mm |

AV3/AVM3/AVT3/AVL3 (FS/FS-T) Switches

● Simulated roller lever



External dimensions

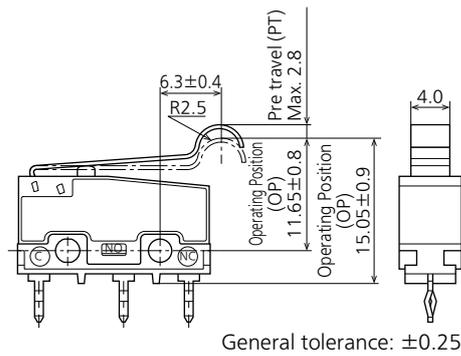


General tolerance: ± 0.25

| | | |
|---------------------------------|-----------------------------|--------------------|
| Pretravel (PT) Max. | 2.8 mm | |
| Movement Differential (MD) Max. | 0.8 mm | |
| Overtravel (OT) Min. | 1.2 mm | |
| Operating Position (OP) | Distance from mounting hole | 11.65 ± 0.8 mm |
| | Distance from stand-off | 15.05 ± 0.9 mm |

• Roller lever



External dimensions

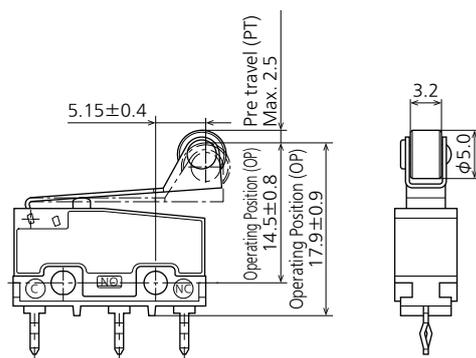


General tolerance: ± 0.25

| | | |
|---------------------------------|-----------------------------|-------------------|
| Pretravel (PT) Max. | 2.5 mm | |
| Movement Differential (MD) Max. | 0.5 mm | |
| Overtravel (OT) Min. | 0.8 mm | |
| Operating Position (OP) | Distance from mounting hole | 14.5 ± 0.8 mm |
| | Distance from stand-off | 17.9 ± 0.9 mm |

● Solder terminal



External dimensions

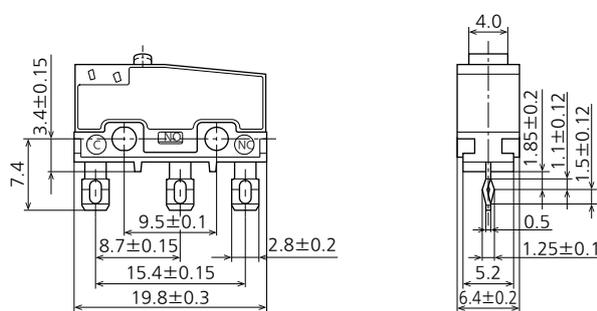


General tolerance: ± 0.25

Note) Dimensions other than drawn above is same as self-standing P/C board terminal.

● .110 Quick-connect terminal



External dimensions

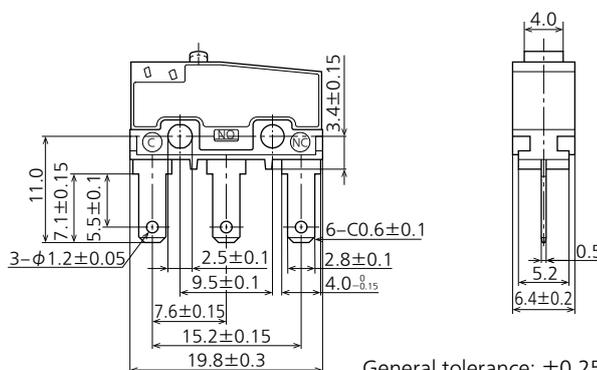


General tolerance: ± 0.25

Note) Dimensions other than drawn above is same as self-standing P/C board terminal.


■ FS-T switches (Cross-line terminal type)

CAD

- P/C board terminal
- Pin plunger

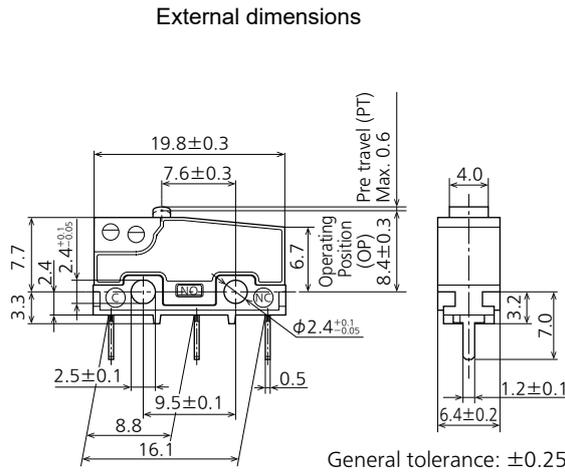


P/C board pattern




| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 0.6 mm | |
| Movement Differential (MD) Max. | 0.1 mm | |
| Overtravel (OT) Min. | 0.4 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.4±0.3 mm |
| | Distance from stand-off | 11.7±0.4 mm |

● Short hinge lever

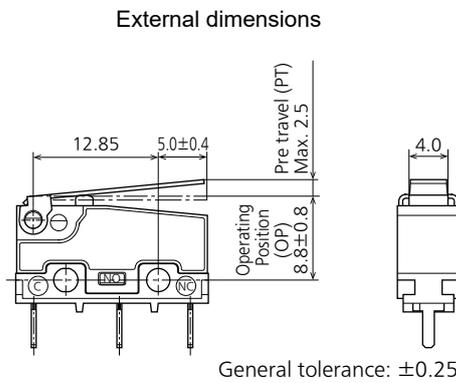


| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 2.5 mm | |
| Movement Differential (MD) Max. | 0.5 mm | |
| Overtravel (OT) Min. | 0.8 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±0.8 mm |
| | Distance from stand-off | 12.1±0.9 mm |

● Hinge lever

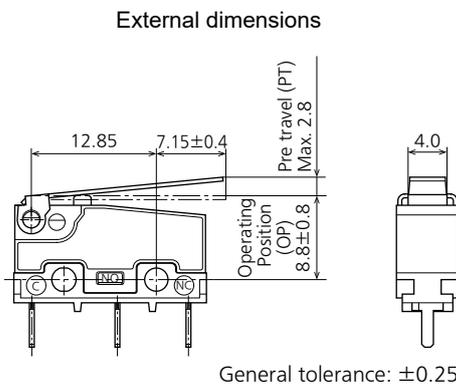

| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 2.8 mm | |
| Movement Differential (MD) Max. | 0.8 mm | |
| Overtravel (OT) Min. | 1.2 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±0.8 mm |
| | Distance from stand-off | 12.1±0.9 mm |

● Long hinge lever

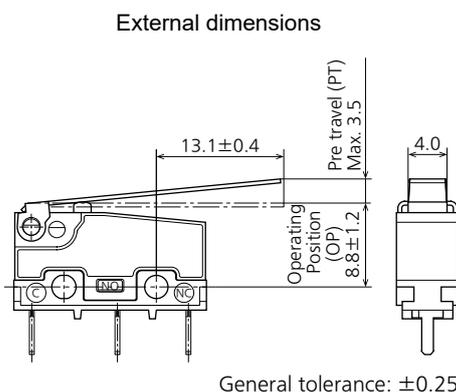


| | | |
|---------------------------------|-----------------------------|-------------|
| Pretravel (PT) Max. | 3.5 mm | |
| Movement Differential (MD) Max. | 1.0 mm | |
| Overtravel (OT) Min. | 1.6 mm | |
| Operating Position (OP) | Distance from mounting hole | 8.8±1.2 mm |
| | Distance from stand-off | 12.1±1.3 mm |

GUIDELINES FOR USAGE

Common for FS type and FS-T type

■ Regarding fastening of switch body

- 1) To secure the switch, please use an M2.3 small screw on a flat surface and tighten using a maximum torque of 0.29 N·m. Also, we recommend the use of spring washers in order to prevent loosening of the installation screws.
- 2) When the operation object is in the free position, force should not be applied directly to the actuator or pin plunger. Also force should be applied to the pin plunger from vertical direction to the switch.
- 3) In setting the movement after operation, the Overtravel OT should be set not less than 70% as a standard. Setting the movement at less than 70% of OT may cause troubles such as mis-contact and welding due to small contact force of the switch.

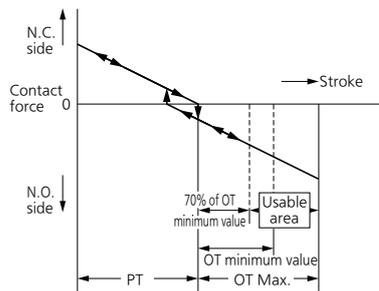

In addition, even if FS type switch actuator is pushed to full limit of operating position, it does not affect product life. However, heavy impact and excessive loading should not be applied.

■ Soldering operation

Perform soldering in less than 3 seconds with maximum 350°C iron. Care should be taken not to apply force to the terminals during soldering. We recommend a soldering iron with temperature adjustment in order to prevent poor quality soldering. Please consult us if you intend to use a soldering iron of 60 W or higher.

■ Environment

Locations where corrosive gases having a bad influence on contacts are present, and locations where there is an excessive amount of siliceous or other abrasive dust should be avoided.

■ Regarding connector connections (.110 quick connect terminals)

For making connections, a dedicated receptacle for .110 quick connect terminals should be used, and the terminals should be inserted parallel to the receptacle. Consideration should be given to mounting so that no tensile load is applied to the lead wires.

■ In making the switch selection


Consideration should be given to provide for no interference up to +20% variation of the standard characteristics values.

3P CONNECTOR

(Both AV3/AVM3 subminiature switches and ABS turquoise switches)

The .110 Quick-connect terminal type of S type turquoise switches and FS type subminiature switches fit direct contact 3P connectors (Nippon Tanshi Co., Ltd.)

Reverse insertion prevention

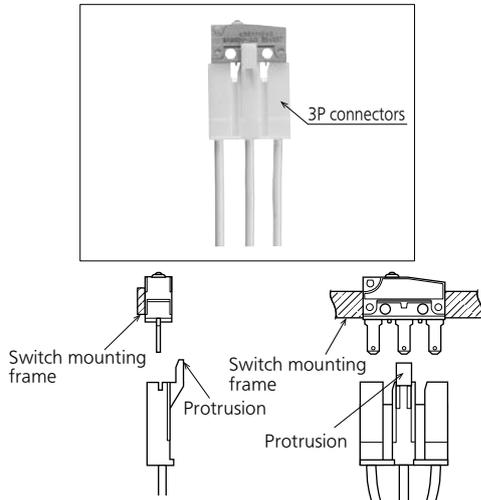

As shown in the diagram, the protrusion on the 3P connector can only be inserted on the corresponding side of the mounting frame. That is, using the plunger as a reference, the subminiature switches can only be inserted in the direction shown in the diagram: it is not possible to mount it the wrong way round.

● If you have any questions, please directly contact:
Nippon Tanshi Co., Ltd.

● Product name and Product number

Product name: 3P connectors for 7.6 mm pitch subminiature switches

Product number

| Name | Product number | Remark (Suitable wire) |
|------------|----------------|-----------------------------|
| Housing | 9880-4203 | — |
| Receptacle | 171587-M2 | 0.3 to 0.75 mm ² |

Note: Please note that Panasonic does not sell this connector.

Please refer to **"the latest product specifications"** when designing your product.

•Requests to customers:

<https://industrial.panasonic.com/ac/e/salespolicies/>

TECHNICAL TERMINOLOGY

■ Detection Switches

A compact switch equipped with an enclosed micro-gap snapaction contact mechanism that makes a specified motion with a specified force to open/close a circuit, and an actuator outside the enclosure (hereinafter referred to as the switch)

■ Actuator

A part of the switch that transmits the received external force to an internal spring mechanism to move the movable contact so that the switch can be opened and closed

■ Actuator stopper

A part of the switch to limit the actuator movement in the switch operation direction

■ Rated values

Values indicating the characteristics and performance guarantee standards of the snap-action switches. The rated current and rated voltage, for instance, assume specific conditions (type of load, current, voltage, frequency, etc.).

■ Mechanical life

The service life when operated at a preset operating frequency without passing electricity through the contacts. (The life test is performed at a switching frequency of 60 times/minute and operating speed of 100 mm/second at the regular cam.)

■ Electrical life

The service life when the rated load is connected to the contact and switching operations are performed. (The life test is performed at a switching frequency of 20 times/minute and operating speed of 100 mm/second at the regular cam.)

■ Contact form

This refers to the components determining the type of application which make up the electrical input/output circuits in the contact.

| | |
|-----------|--|
| SPDT | |
| SPST-N.C. | |
| SPST-N.O. | |

■ Insulation resistance

Resistance between non-continuous terminals, each terminal and other exposed metal parts and between each terminal and ground.

■ Dielectric

Threshold limit value that a high voltage can be applied to a predetermined measuring location for one minute without causing damage to the insulation.

■ Contact resistance

This indicates the electrical resistance at the contact part. Generally, this resistance includes the conductor resistance of the spring and terminal portions.

■ Vibration resistance

Malfunction vibration ... Vibration range where a closed contact does not open for longer than a specified time due to vibrations during use of the snap-action switches.


■ Shock resistance

Shock durability ... Shock range where the mechanical shocks received during snap-action switches transport and installation do not damage the parts or harm the operating characteristics.
Malfunction shock ... Shock range where a closed contact does not open for longer than a specified time due to shocks during use of the snap-action switches.

TECHNICAL TERMINOLOGY

■ Definition of operating characteristic

The main terminological illustrations and meanings which are used with snapaction switches are as follows.

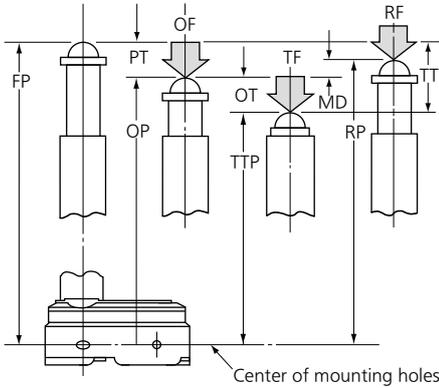


| Classification | Terminology | Symbol | Unit | Varying display method | Starting current |
|----------------|-----------------------|--------|------------|------------------------|---|
| Force | Operating Force | OF | N | Max. | The force required to cause contact snap-action. It is expressed terms of force applied to the the actuator. |
| | Release Force | RF | N | Min. | The force to be applied to the the actuator at the moment contact snaps back from operated position to total travel position. |
| | Totaltravel Force | TF | N | | Force applied to an actuator required to move from an operating position to a total travel position |
| Movement | Pretravel | PT | mm, degree | Max. | Distance or agree of the actuator movement from free position to operating position. |
| | Overtravel | OT | mm, degree | Min. | The distance or degree which the actuator is permitted to travel after actuation without any damage to the switching mechanism. |
| | Movement Differential | MD | mm, degree | Max. | The distance or degree from operating position to release position of the actuator. |
| | Totaltravel | TT | mm, degree | | The migration length or the move angle from the free position to total travel position of actuator |
| Position | Free Position | FP | mm, degree | | Position of the actuator when no force is applied to. |
| | Operating Position | OP | mm, degree | ± | The position of the actuator when the traveling contacts snaps with the fixed contact. |
| | Release Position | RP | mm, degree | | The position of the actuator when the traveling contact snaps back from operating position to its original position. |
| | Total travel Position | TTP | mm, degree | | The stopping position of the actuator after total travel. |

TECHNICAL NOTES ON MECHANICAL CHARACTERISTICS

Actuation Force and Stroke

Adequate stroke setting is the key to high reliability. It is also important that adequate contact force be maintained to ensure high reliability. For a normally closed (N.C.) circuit, the driving mechanism should be set so that the actuator is normally in the free position. For a normally open (N.O.) circuit, the actuator should be pressed to 70% to 100% of the specified stroke to absorb possible errors. If the stroke is set too close to the operating point (OP), this may cause unstable contact, and in the worst case may cause actuator damage due to inertia of the drive mechanism. It is advisable that the stroke be adjusted with the mounting plate or driving mechanism.

The figure at right shows a typical example of activation and contact forces varying with stroke. In the vicinity of the OP and RP, the contact force is diminished, causing chatter and contact bounce immediately before or after reversal. For this reason, use the switch while giving due consideration to this. This also causes the snap action switch to be sensitive to vibration or shock.

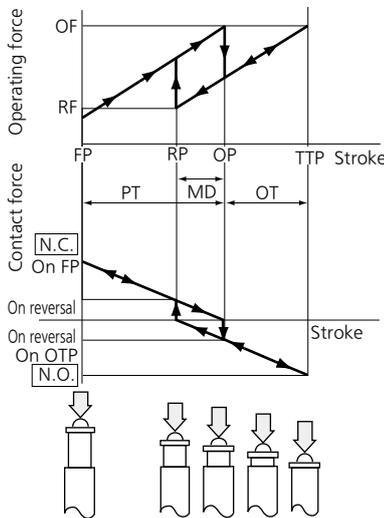

Changes in Operating Characteristics

Exercise design care so that malfunctions will not occur if the operating characteristics vary by as much as 20% from, rated values.

<Example>

In the OF Max. 0.98N specification for FS snap-action switches, the allowable Max. is 0.98 N (100%+20%) = 1.18 N

In the RF Min. 0.15 N Min. specification the allowable Min. 0.15 N (100%-20%) = 0.12 N

Mechanical Conditions for Type Selection


Actuator type should be selected according to activation method, activation speed, activation rate, and activation frequency.

- 1) An extremely slow activation speed may cause unstable contact transfer, possibly resulting in contact failures or contact fusion.
- 2) An extremely high activation speed may cause damage to contacts or contact response failure.

Driving Mechanism

Use of a driving mechanism which will cause physical impact to the actuator should be avoided.


<Example>



TECHNICAL NOTES ON ELECTRICAL CHARACTERISTICS

- 1) The snap-action switch is designed for AC operations. While it has small contact gaps and no arc absorber, it may be used for low-capacity DC operations. Please refer to the rating of each products
- 2) For applications with very small switching voltage or current, choose the low-level load type (Au contact).

Small current and voltage application range (Au contact)

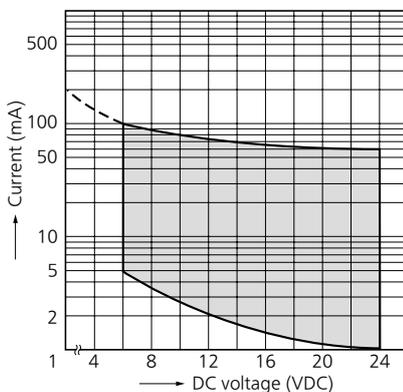

- 3) When selecting a contact type of a snap-action switch to be used for low-level load switching, the following should be noted. Silver contacts' surfaces are prone to be oxidized and form a sulfide film. The switch operates with no problems at the beginning of use. However, as the contact surfaces develop films with time, the film may not be broken by the switching operation, causing a conduction failure. Therefore, please choose the Au contact type for switching a load of 0.1 A or below.
- 4) Application to Electronic Circuits
 - The snap-action switch contacts can sustain bounce or chatter when closed. Bounce or chatter can cause noise or pulse count errors when the snap action switch is used in electronic circuits.
 - If contact bounce or chatter poses problems in the vicinity of the OP and RP, use a suitable absorption network, such as a C/R network.
- 5) Check the surge current, normal current and surge duration.
- 6) Contact resistance given in performance specifications is measured with a voltage drop method using 6 to 8 V DC, 1 A (except for low-level load type). Contact resistance across COM and N.C. terminals is measured in the free position, while contact resistance across COM and N.O. terminals is measured in the total travel position.
- 7) To prevent contact welding failure, be sure to use a serial resistance for each capacitive load.
- 8) If snap-action switch operation is synchronized with the AC supply phase, this may cause: shortened electrical life, contact fusion failure, contact transfer, or other reliability problems.



CAUTIONS IN A CIRCUIT

1) Contact protection is recommended when snap-action switches are used in an inductive load circuit.

| Circuit diagram | Cautions for use |
|-----------------|--|
| | (1) $r =$ more than 10Ω (2) In an AC circuit Impedance of R is to be slightly smaller than impedance of r and c. |
| | Can be used for both AC and DC. Impedance of r is nearly equal to impedance of R. C: $0.1 \mu\text{F}$ |
| | (1) For DC circuits only. |
| | Can be used for both AC and DC. |


2) Do not connect the contacts on individual switches to different type or different poles of the power supply.

Examples of power supply connections (connection to different poles)




Example of wrong power supply connection (connection to different poles of power supply)

This may lead to mixed DC and AC.



3) Avoid circuits which apply voltage between contacts. (This may lead to mixed deposition.)



MOUNTING STATE AND ENVIRONMENT

■ Checking the insulation distance

After mounting and wiring, check the insulation distance between terminals and the ground. If the insulation distance is inadequate, mount insulating material between as required.

■ Fastening the snap-action switch body

See the Section "CAUTIONS FOR USE" for the individual switch.

■ Position adjustment with effector


- 1) The effector should be positioned so that direct force is not applied to the plunger or actuator in its free position. The operating force to the plunger should only be applied in a perpendicular direction.
- 2) Note that the use of the switch as a stopper may cause an operational problem.

■ Switch installation position

● Basically, the switch should be installed so that the object to press the switch's plunger or lever can press it down to 70 to 100% of OT of the switch. When determining the position, the tolerance of OP (Operating Position) and other factors should be taken into account. The following describes the case where the strictest tolerance conditions are adopted.

● Example: Hinge lever type FS switch

Reference values: OP = 8.8 ± 0.8 mm
 PT = Max. 2.8 mm
 OT = Min. 1.2 mm

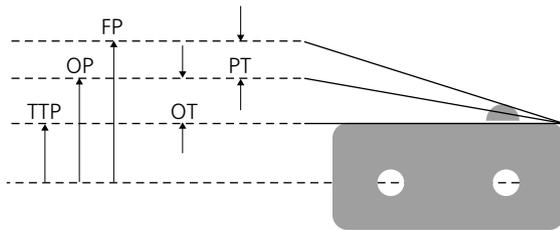

- (1) When the switch is not pressed
 The object to press the lever should not be in contact with the lever.
 For this purpose, the object should be at a distance from the switch fater than the maximum FP (Free Position) value.
 $FP \text{ Max} = OP \text{ Max} + PT \text{ Max} = 9.6 + 2.8 = 12.4 \text{ mm Max}$
 The object should be at a distance of 12.4 mm or more from the mounting hole.
- (2) Depressed position
 The plunger/lever should be pressed down to 70% or more of OT (Over Travel). Therefore, the depressed position should be calculated based on the minimum value of OP (Operating Position) and the 70 and 100% of the OT value.
 $OP \text{ Min} - 70\% \text{ of OT} = 8.0 - 0.84 = 7.16 \text{ mm}$
 $OP \text{ Min} - 100\% \text{ of OT} = 8.0 - 1.2 = 6.80 \text{ mm}$
 The plunger/lever should be pressed down to the position of 6.80 to 7.16 mm from the mounting hole.


■ Soldering precautions

For manual soldering, lay the terminals flat (horizontal with the ground) and quickly perform the soldering operation using a soldering iron with the appropriate heat capacity and the proper amount of solder. Take care that the flux does not flow into the switch interior by using a ventilation fan to discharge flux gas and to prevent contact of the switch body with the soldering iron tip. Be careful not to apply force to the lead wires or the terminal portions immediately after soldering.

The temperature setting and time conditions vary depending on the product.

See the section "CAUTIONS FOR USE" for each product.

<Examples>

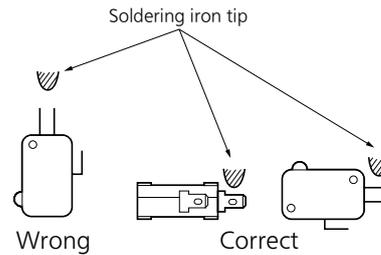

■ Avoid using in a silicon atmosphere

Avoid using organic silicon rubber, adhesives, sealing compounds, oil, grease, and wires in a silicon atmosphere.

■ Please consult us when using under the following conditions*:

- 1) Environments where hydrogen sulfide or other corrosive gases are present.
- 2) Environments where gasoline, thinner or other flammable, explosive gases are present.
- 3) Dusty environments (for non-seal type snap action switches).
- 4) The perpendicular operating speed exceeds the allowable operating speed.
- 5) Switching between different poles.
- 6) Use in environments not in the prescribed temperature or humidity range.

■ Storage precautions

To prevent discoloration due to sulfurization of the terminals (silver-plated), store the switches in a polyethylene bag or other suitable airtight container.


■ Usage, storage, and transport conditions (except turquoise switches)

During usage, storage, or transportation, avoid locations subject to direct sunlight and maintain normal temperature, humidity, and pressure conditions.

The allowable specifications for environments suitable for usage, storage, and transportation are given below.

- 1) Temperature: The allowable temperature range differs for each switch, so refer to the switch's individual specifications. In addition, when transporting or storing switches while they are tube packaged, there are cases when the temperature may differ from the allowable range. In this situation, be sure to consult the individual specifications.
- 2) Humidity: The allowable humidity range differs for each switch, so refer to the switch's individual specifications.
- 3) Pressure: 86 to 106 kPa

The humidity range varies with the temperature. Use within the range indicated in the graph below.

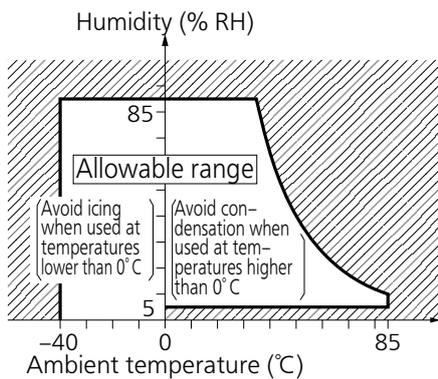

(The allowable temperature depends on the switch.)

- Condensation will occur inside the switch if there is a sudden change in ambient temperature when used in an atmosphere of high temperature and high humidity. This is particularly likely to happen when being transported by ship, so please be careful of the atmosphere when shipping. Condensation is the phenomenon whereby steam condenses to cause water droplets that adhere to the switch when an atmosphere of high temperature and humidity rapidly changes from a high to low temperature or when the switch is quickly moved from a low humidity location to one of high temperature and humidity. Please be careful because condensation can cause adverse conditions such as deterioration of insulation, coil cutoff, and rust.
- Condensation or other moisture may freeze on the switch when the temperatures is lower than 0°C 32°F. This causes problems such as sticking of movable parts or operational time lags.
- The plastic becomes brittle if the switch is exposed to a low temperature, low humidity environment for long periods of time.
- Storage for extended periods of time (including transportation periods) at high temperatures or high humidity levels or in atmospheres with organic gases or sulfide gases may cause a sulfide film or oxide film to form on the surfaces of the contacts and/or it may interfere with the functions. Check out the atmosphere in which the units are to be stored and transported.
- In terms of the packing format used, make every effort to keep the effects of moisture, organic gases and sulfide gases to the absolute minimum.

■ We reserve the right to modify without notice the materials, internal components, and other parts to improve product quality.

■ Handling precautions


When handling the switches, be careful not to drop them on the floor since this may damage them.

* Select contact sulfurization (clipping) prevention products (FS and Au-clad double layer contacts) for use with extremely small loads or an environment-resistant Turquoise switch.

■ Others

- 1) Failure modes of switches include short-circuiting, opencircuiting and temperature rises. If this switch is to be used in equipment where safety is a prime consideration, examine the possible effects of these failures on the equipment concerned, and ensure safety by providing protection circuits or protection devices. In terms of the systems involved, make provision for redundancy in the design and take steps to achieve safety design.
- 2) The ambient operating temperature (and humidity) range quoted is the range in which the switch can be operated on a continuous basis: it does not mean that using the switch within the rating guarantees the durability performance and environment withstanding performance of the switch. For details on the performance guarantee, check the specifications of each product concerned.

Technical Terminology & Cautions for Use (Detection Switches)

| Shape | Classification | Pretravel (PT) | Overtravel (OT) | Operating Force (OF) | Vibration Shock | Features |
|---|------------------------|----------------|-----------------|----------------------|-----------------|---|
|  | Pin plunger | Small | Small | Large | Outstanding | Appropriate for linear short-stroke action. Pin plunger acts directly on snap action mechanism, enabling high-precision positioning. Amount of movement after operation is smallest among all of the actuators, however, so reliable stopper is required. |
|  | Hinge lever | Large | Medium | Small | Possible | Little force required for operation. Appropriate for use with low-speed cams and dogs; has large stroke. Lever available in various shapes to fit operating unit. |
|  | Simulated roller lever | Large | Medium | Small | Possible | Tip of hinge lever is bent into a semi-circle, enabling use as a simple roller type. |
|  | Leaf lever | Large | Large | Small | Excellent | Play in lever is used to assure maximum stroke. Construction provides for space where lever is attached, for outstanding resistance to freezing. |
|  | Hinge roller lever | Large | Medium | Small | Possible | This is a hinge lever with a roller, and can be used with high-speed cams and dogs. The force required for pin plunger action is lighter than that of the lever, and the stroke is longer. |

Panasonic
INDUSTRY

Panasonic Industry Co., Ltd.

Electromechanical Control Business Division
■1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/