

2W GaN Power Transistor

2W GaN Power Transistor (0.15 μ m x 480 μ m gate)


The BeRex BCG002 is a GaN Power HEMT die with a nominal 0.15 micron gate length and 480 micron gate width making the product ideally suited for amplifier applications where high-gain and high power from DC to 26 GHz. The product may be used in either wide-band or narrow-band applications. The BCG002 is produced using state of the art metallization with Si₃N₄ passivation and is screened to assure reliability.

Product Features

- 33.5 dBm Typical Saturated Output Power (P3dB) @ 12 GHz
- 12.5 dB Typical Saturated gain (G3dB) @ 12 GHz
- 55 % PAE Typical @ 12 GHz
- 0.15 X 480 Micron Recessed Gate

Applications

- Commercial
- Military / Hi-Rel.
- Test & Measurement

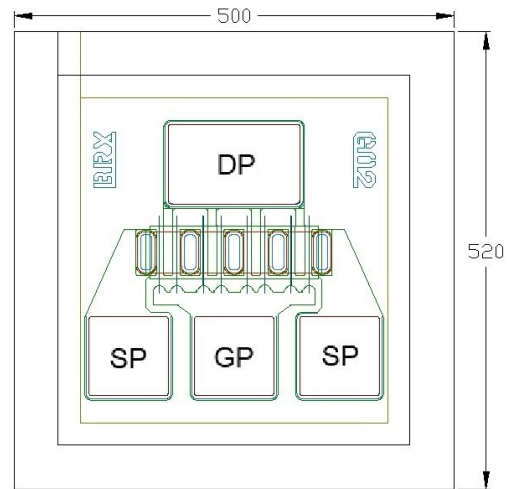

Chip dimensions : 500 X 520 microns
 Gate pad(GP) : 90 X 90 microns
 Drain pad(DP) : 150 X 90 microns
 Source pad(SP) : 90 X 90 microns
 Chip thickness : 75 microns

Typical Performance

SYMBOLS	PARAMETER/TEST CONDITIONS	TEST FREQUENCY	MIN.	TYPICAL	Max	UNIT
P3dB	Saturated Output Power @ P3dB (V _{ds} = 28V, I _d = 20mA)	12 GHz	32	33.5		dBm
G3dB	Power Gain @ P3dB (V _{ds} = 28V, I _d = 20mA)	12 GHz	11.0	12.5		dB
PAE	PAE @ P3dB (V _{ds} = 28V, I _d = 20mA)	12 GHz		55		%
I _{dss}	Saturated Drain Current (V _{gs} = 0.0 V, V _{ds} = 10.0 V)		265	330	400	mA
V _p	Pinch-off Voltage (I _{ds} = 0.48 mA, V _{ds} = 10 V)			-1.9		V
BV _{gd}	Drain Breakdown Voltage (I _g = 0.48 mA, source open)			84		V
BV _{gs}	Source Breakdown Voltage (I _g = 0.48 mA, drain open)			-6.5		V
R _{th}	Thermal Resistance			10.1		° C/W

MAXIMUM RATING (Ta = 25° C)


SYMBOLS	PARAMETERS	ABSOLUTE
V _{ds}	Drain-Source Voltage	90 V
V _{gs}	Gate-Source Voltage	-10 V
I _{ds}	Drain Current	0.6 A
I _{gsf}	Forward Gate Current	2 mA
T _{stg}	Storage Temperature	-60° C to 150° C
P _t	Total Power Dissipation	4.0 W

Exceeding any of the above Maximum Ratings will result in reduced MTTF and may cause permanent damage to the device.

S-PARAMETERS (Vds = 28V, Ids = 20mA, T = 25°C)

FREQ. [GHZ]	S11 [MAG]	S11 [ANG.]	S21 [MAG]	S21 [ANG.]	S12 [MAG]	S12 [ANG.]	S22 [MAG]	S22 [ANG.]
1	0.94	-35.35	10.19	154.50	0.032	77.42	0.79	-18.19
2	0.86	-67.92	8.98	133.53	0.058	48.62	0.69	-31.85
3	0.78	-97.37	7.72	115.14	0.069	40.83	0.61	-43.21
4	0.72	-122.19	6.52	99.91	0.080	28.00	0.52	-51.25
5	0.69	-146.78	5.58	86.74	0.083	24.45	0.46	-56.97
6	0.68	-167.26	4.76	74.90	0.078	13.98	0.40	-62.01
7	0.68	175.73	4.14	64.40	0.080	13.86	0.36	-66.81
8	0.69	160.90	3.67	54.66	0.079	8.18	0.33	-73.48
9	0.72	146.97	3.23	45.61	0.077	7.40	0.30	-78.23
10	0.74	135.07	2.82	36.80	0.074	2.42	0.27	-83.05
11	0.76	126.53	2.49	28.84	0.065	3.47	0.24	-90.68
12	0.78	119.24	2.25	22.06	0.068	4.86	0.23	-101.92
13	0.80	112.54	2.03	15.01	0.064	-3.01	0.22	-119.04
14	0.82	105.15	1.84	7.21	0.065	1.19	0.23	-132.81
15	0.84	97.25	1.63	0.08	0.061	-0.31	0.26	-143.32
16	0.87	91.06	1.46	-7.15	0.067	-2.02	0.28	-152.25
17	0.88	87.26	1.30	-12.34	0.061	-1.31	0.32	-159.92
18	0.88	84.50	1.15	-17.67	0.071	-1.51	0.35	-166.27
19	0.90	83.85	1.04	-21.74	0.066	2.91	0.39	-171.72
20	0.90	83.91	0.92	-25.56	0.063	5.89	0.42	-175.93
21	0.92	82.98	0.83	-28.34	0.069	6.42	0.46	-179.06
22	0.93	82.24	0.75	-31.46	0.074	7.68	0.46	176.96
23	0.95	82.68	0.69	-35.31	0.075	8.57	0.49	172.71
24	0.94	80.51	0.64	-39.05	0.086	7.54	0.48	167.26
25	0.92	83.52	0.59	-41.00	0.079	9.90	0.51	158.35
26	0.90	83.86	0.55	-43.03	0.086	9.72	0.55	153.75

PIN_POUT / Gain, PAE (@ 12 GHz)

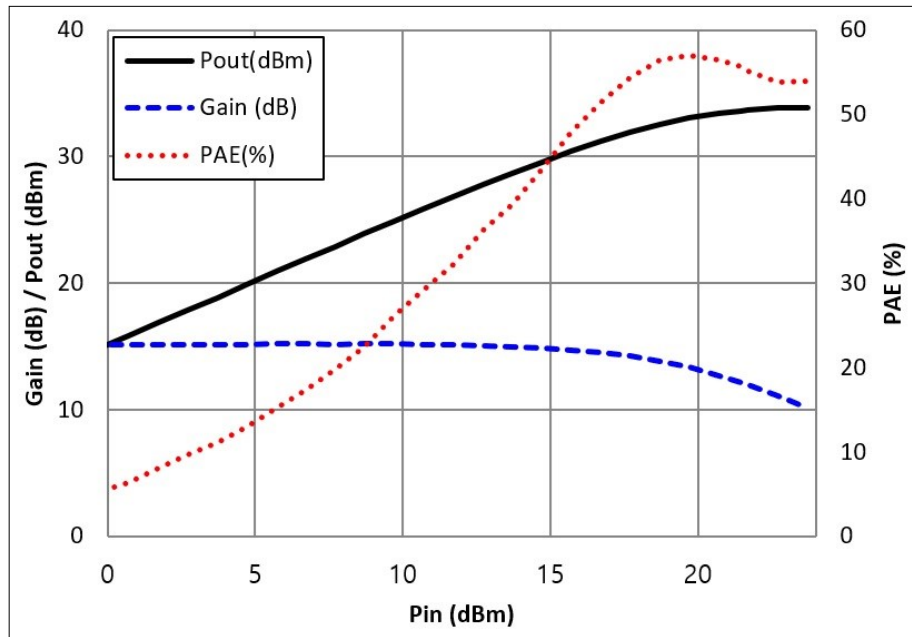

(Vds = 28V, Idq = 20mA, T = 25 °C)

WIRE BONDING INFORMATION

Always follow wire bonding diagrams recommended by BeRex for each device to achieve optimum device performance and reliability. As a general rule, bonding temperature should be kept to a maximum of 280°C for no longer than 2 minutes for all bonding wires.

	<p>Using 1 mil. Diameter, Au bonding wires.</p> <ol style="list-style-type: none"> 1. Gate to input transmission line - Length and Height : 900 μm x 250 μm - Number of wire(s): 1 2. Drain to output transmission line - Length and Height : 400 μm x 250 μm - Number of wire(s) : 1 3. Source to ground plate - Length and Height : 250 μm x 300 μm - Number of wire(s) : 4 4. Gap "A" : 230 ~ 250 μm 5. Gap "B" : 130 ~ 150 μm
--	--

ESD Rating

ESD Testing Mode	Reference (Current Revision)	Resulting Classification
ESD - HBM	JDS - 001 - 2017	Class1A (Passes <500V)



Proper ESD procedures should be followed when handling this device.

HANDLING PRECAUTIONS

GaN HEMTs are very sensitive to and may be damaged by Electrostatic Discharge (ESD). Therefore, proper ESD precautions must be taken whenever you are handling these devices. It is critically important that all work surfaces, and assembly equipment, as well as the operator be properly grounded when handling these devices to prevent ESD damage.

DIE ATTACH RECOMMENDATIONS

BeRex recommends the “Eutectic” die attach using Au/Sn (80/20) pre-forms. The die attach station must have accurate temperature control, and the operation should be performed with parts no hotter than 300°C for less than 10 seconds. An inert forming gas (90% N₂/10% H₂) or clean, dry N₂ should be used.

Use of conductive epoxy (gold or silver filled) may also be acceptable for die-attaching low power devices.

SHIPPING & STORAGE

BeRex’s standard chip device shipping package consists of an antistatic “Gel-Pak”, holding the chips, placed inside a sealed metallized bag. This packaging is designed to provide a reasonable measure of protection from both mechanical and ESD damage.

Chip devices should be stored in a clean, dry Nitrogen gas environment at room temperature until they are required for assembly. Only open the shipping package or perform die assembly in a work area with a class 10,000 or better clean room environment to prevent contamination of the exposed devices.

CAUTION

THIS PRODUCT CONTAINS GALLIUM NITRIDE (GaN) ON SILICON CARBIDE (SiC) WHICH CAN BE HAZARDOUS TO THE HUMAN BODY AND THE ENVIRONMENT. THEREFORE, IT MUST BE HANDLED WITH CARE AND IN ACCORDANCE WITH ALL GOVERNMENTAL AND COMPANY REGULATIONS FOR THE SAFE HANDLING AND DISPOSAL OF HAZARDOUS WASTE. DO NOT BURN, DESTROY, CUT, CRUSH OR CHEMICALLY DISSOLVE THE PRODUCT. DO NOT LICK THE PRODUCT OR IN ANY WAY ALLOW IT TO ENTER THE MOUTH. EXCLUDE THE PRODUCT FROM GENERAL INDUSTRIAL WASTE OR GARBAGE AND DISPOSE OF ONLY IN ACCORDANCE TO APPLICABLE LAWS AND/OR ORDINANCES.

DISCLAIMER

BEREX RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. BEREX DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

BEREX PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES WITHOUT THE EXPRESS WRITTEN APPROVAL OF BEREX.

1. Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.