




Ultra Low Profile 0805 Power Divider
50Ω to 50Ω

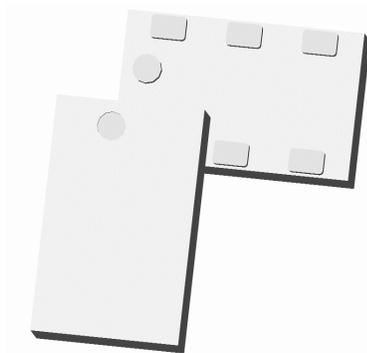

Description:

The PD3150J5050S2HF is a low profile, sub-miniature Wilkinson power divider in an easy to use surface mount package. The PD3150J5050S2HF is ideal for high volume manufacturing and delivers higher performances than traditional printed and lumped element solutions. The PD3150J5050S2HF is matched to 50Ω and has a height profile of 0.5 mm which is ideal for high level integrations in the following markets: DVB-S, GSM, DCS, PCS, WCDMA and GPS, 802.11a+g, Bluetooth, and Zigbee USA. The PD3150J5050S2HF does not include the resistive element and therefore, requires an external resistor for operation. The PD3150J5050S2HF is available on tape and reel for high volume manufacturing pick and place.


Detailed Electrical Specifications:

Specification subject to change without notice.


Features:	Parameter	ROOM (25°C)						Unit		
		Min.	Typ.	Max	Min.	Typ.	Max		Min.	Typ.
<ul style="list-style-type: none"> • 2300-5000 MHz • 0.5mm Height Profile • 50Ω Input / 50Ω Outputs • Low Insertion Loss • Surface Mountable • Tape & Reel • Non-conductive Surface • RoHS Compliant • Halogen Free • External Resistor required 	Frequency	2300		3800	3400	3800	3100	5000		MHz
	Input Port Impedance		50			50		50		Ω
	Output Port Impedance		50			50		50		Ω
	Return Loss	6	7		10	15	6.3	8.6		dB
	Insertion Loss*		1.0	1.6	0.4	1.0	1.0	1.6		dB
	Amplitude Balance		0.3	0.5	0.1	0.4	0.1	0.4		dB
	Phase Balance		1	4	0.5	2	1	2		Degrees
	Isolation (Output Ports)	11	13		17	25	13	15		dB
	Power Handling@105°C			3		3		3		Watts
	Operating Temperature	-55		+140	-55	+140	-55	+140		°C

*Insertion loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)


Outline Drawing:

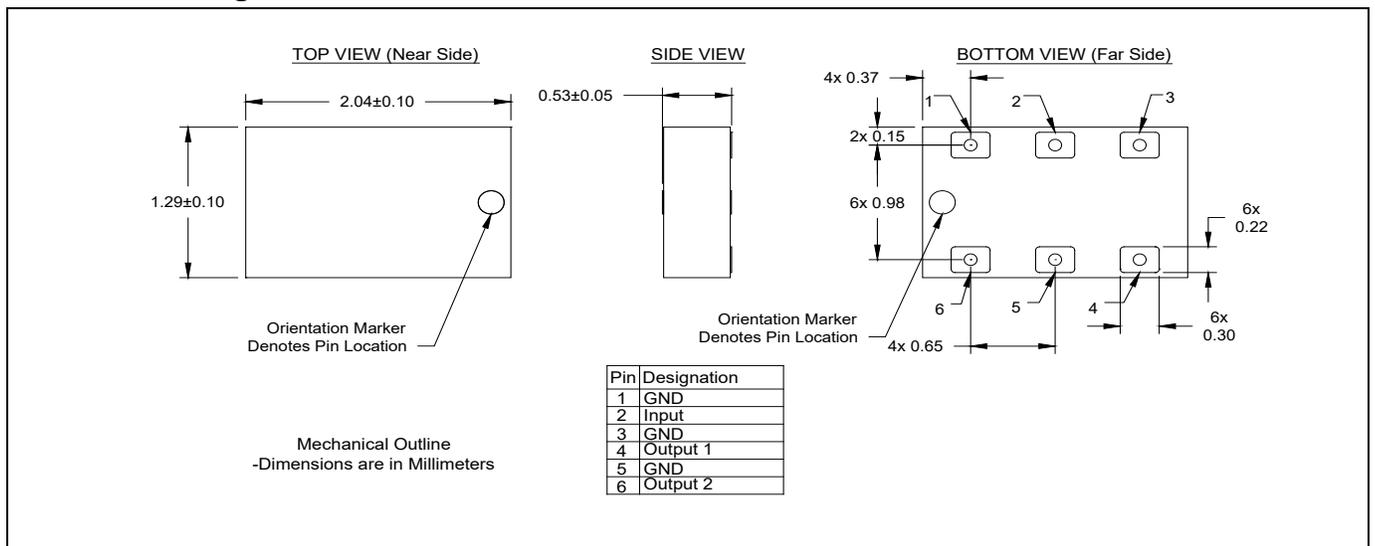

Typical Broadband Performance: 500 MHz. to 8.0 GHz.

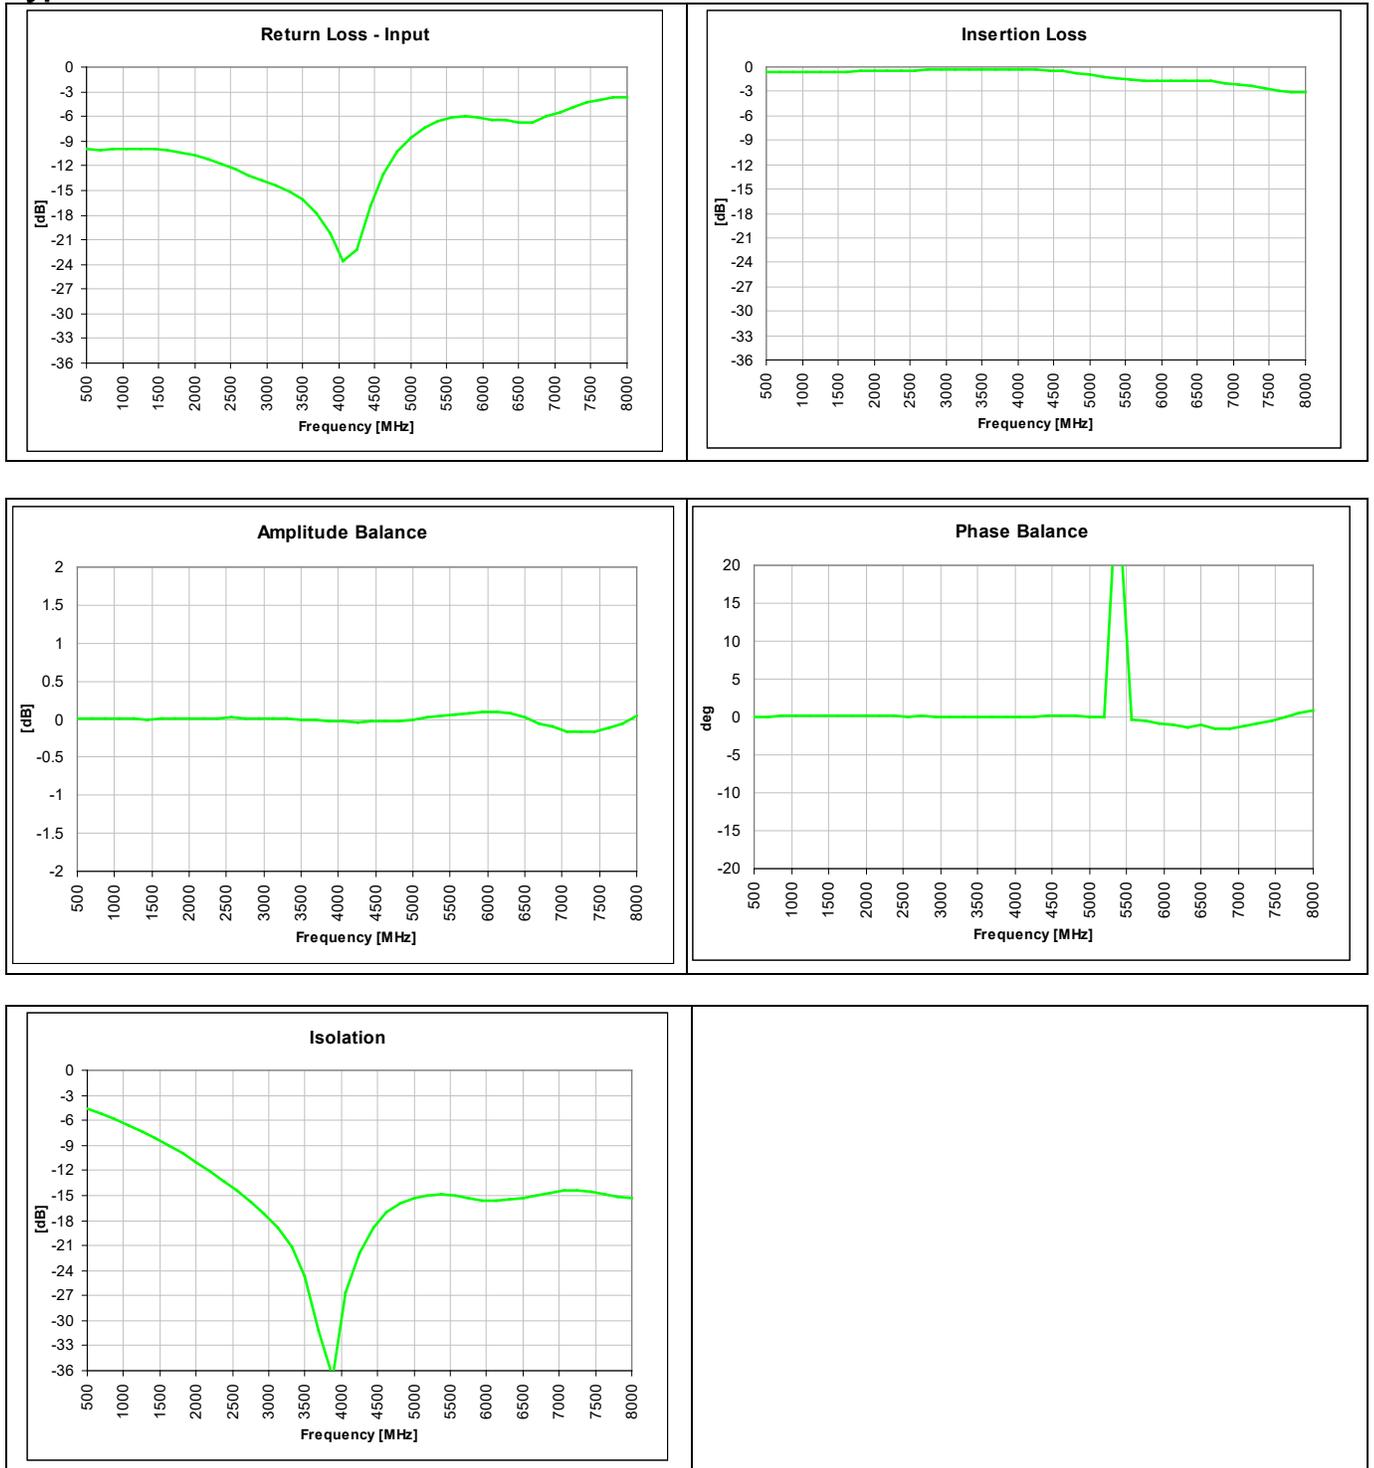

Typical Performance: 3000 MHz. to 5100 MHz.

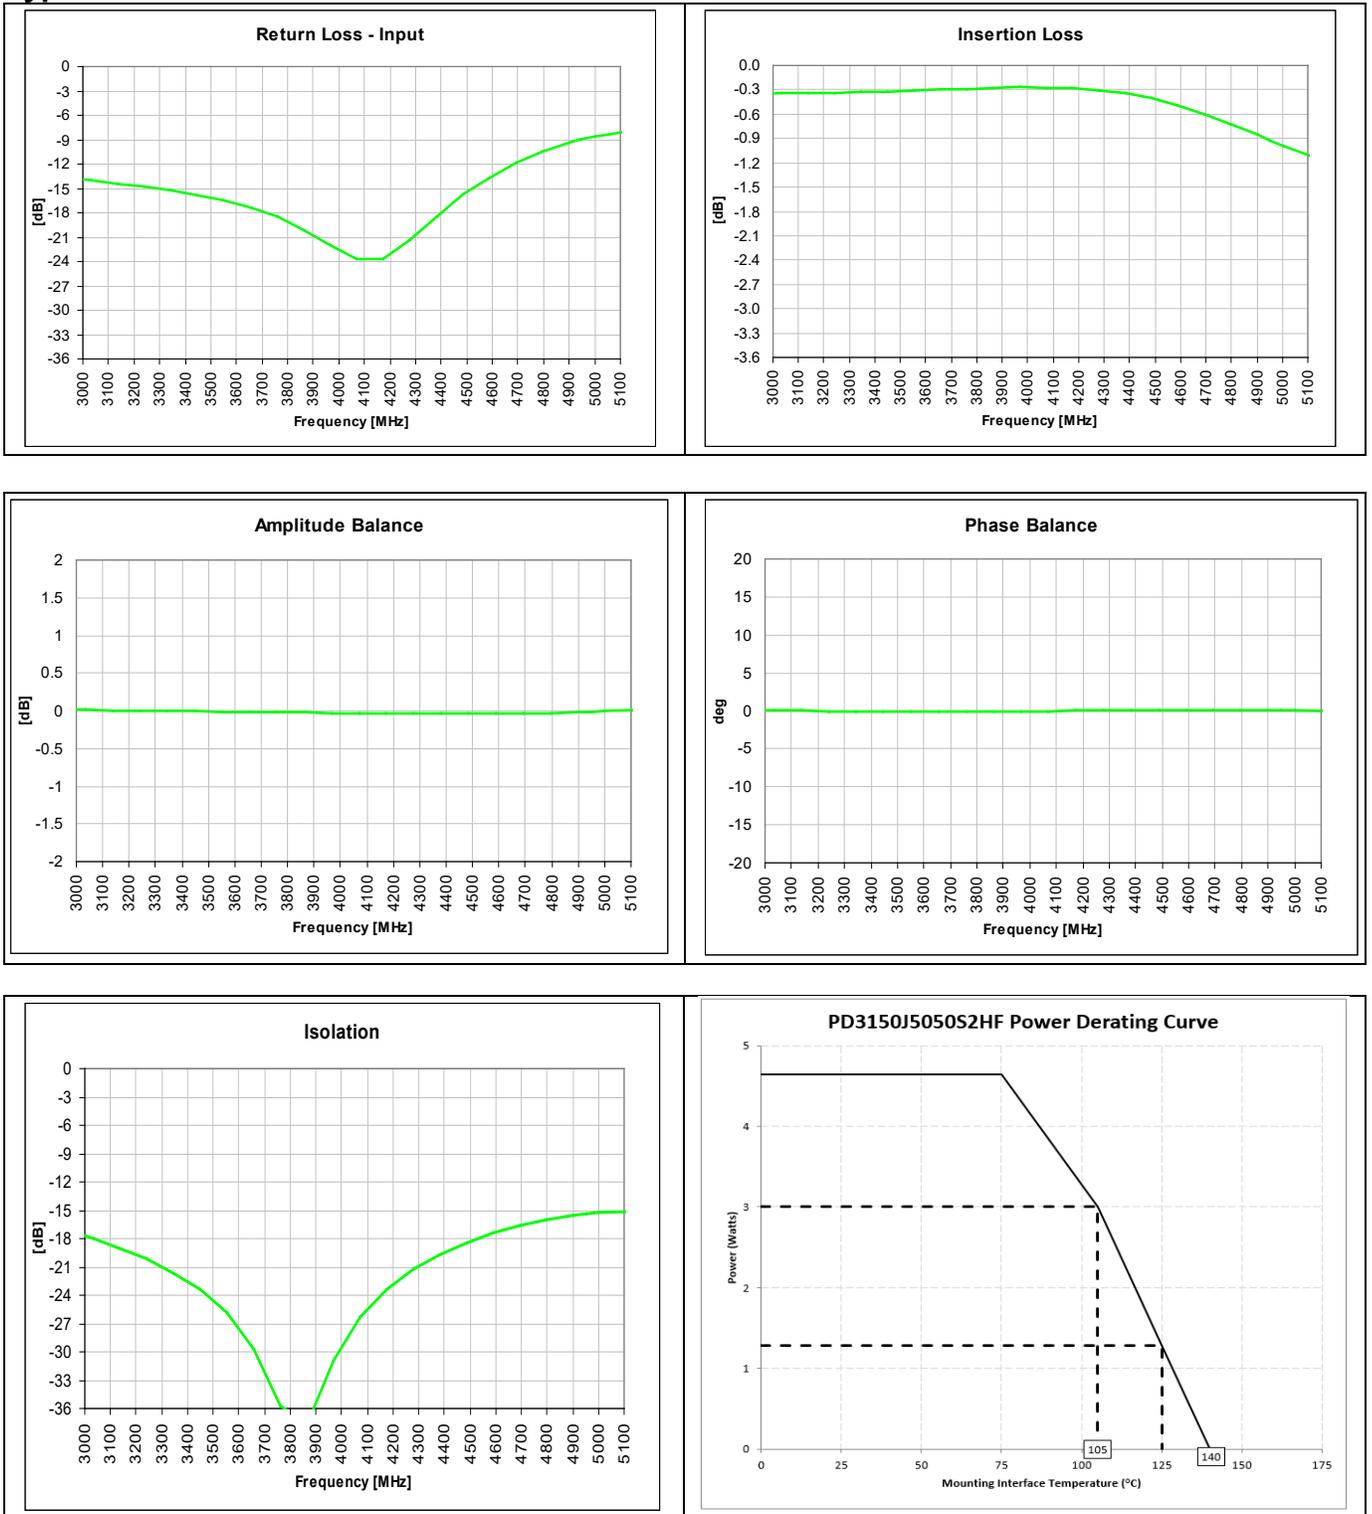


Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.


All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances. In addition, since the PD3150J5050S2HF is a Wilkinson power divider, an external 0603 100Ω resistor must be mounted in locations R1 as shown in the Figure below.

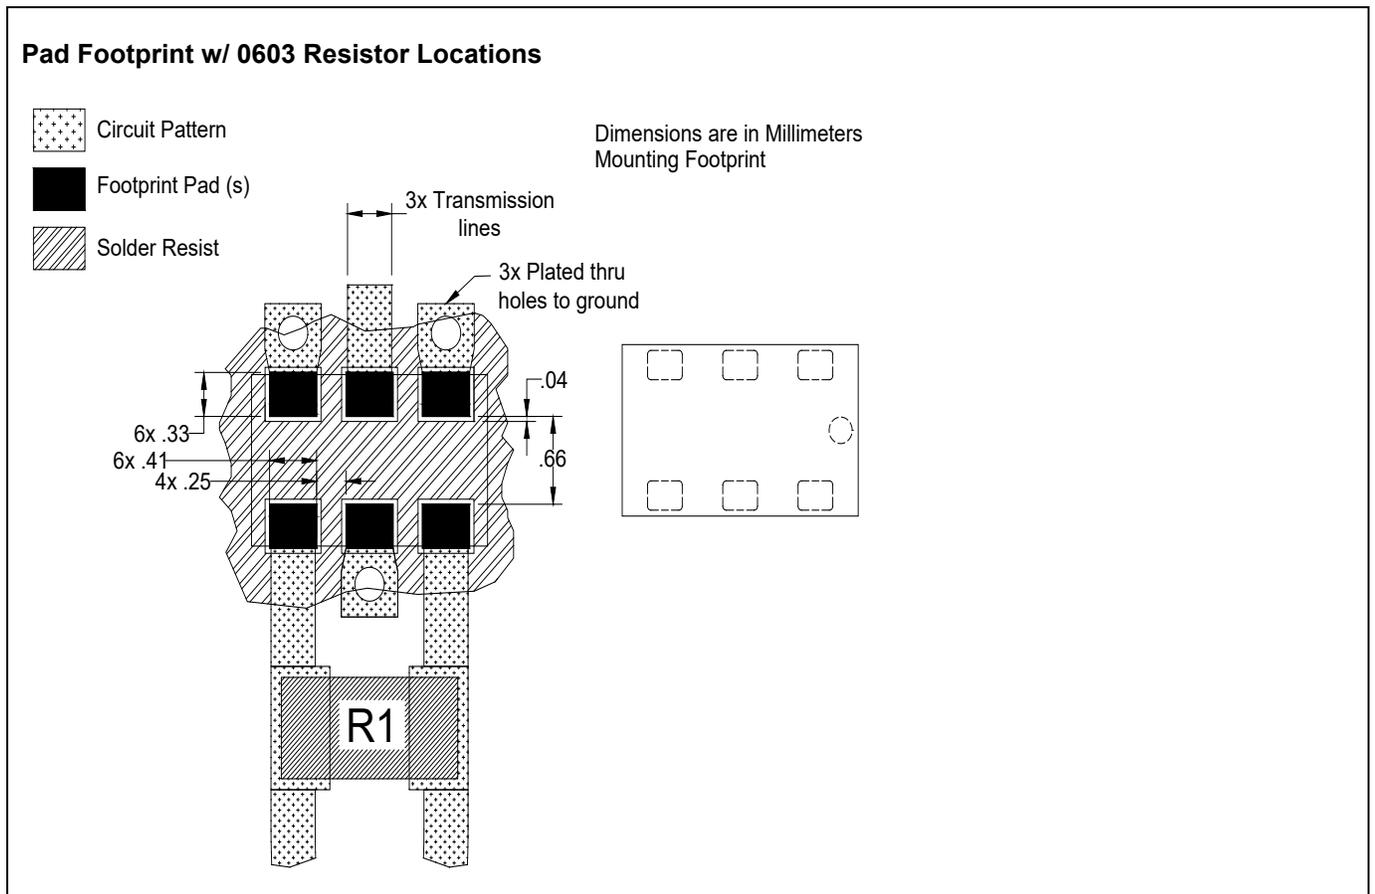

Packaging and Ordering Information:

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

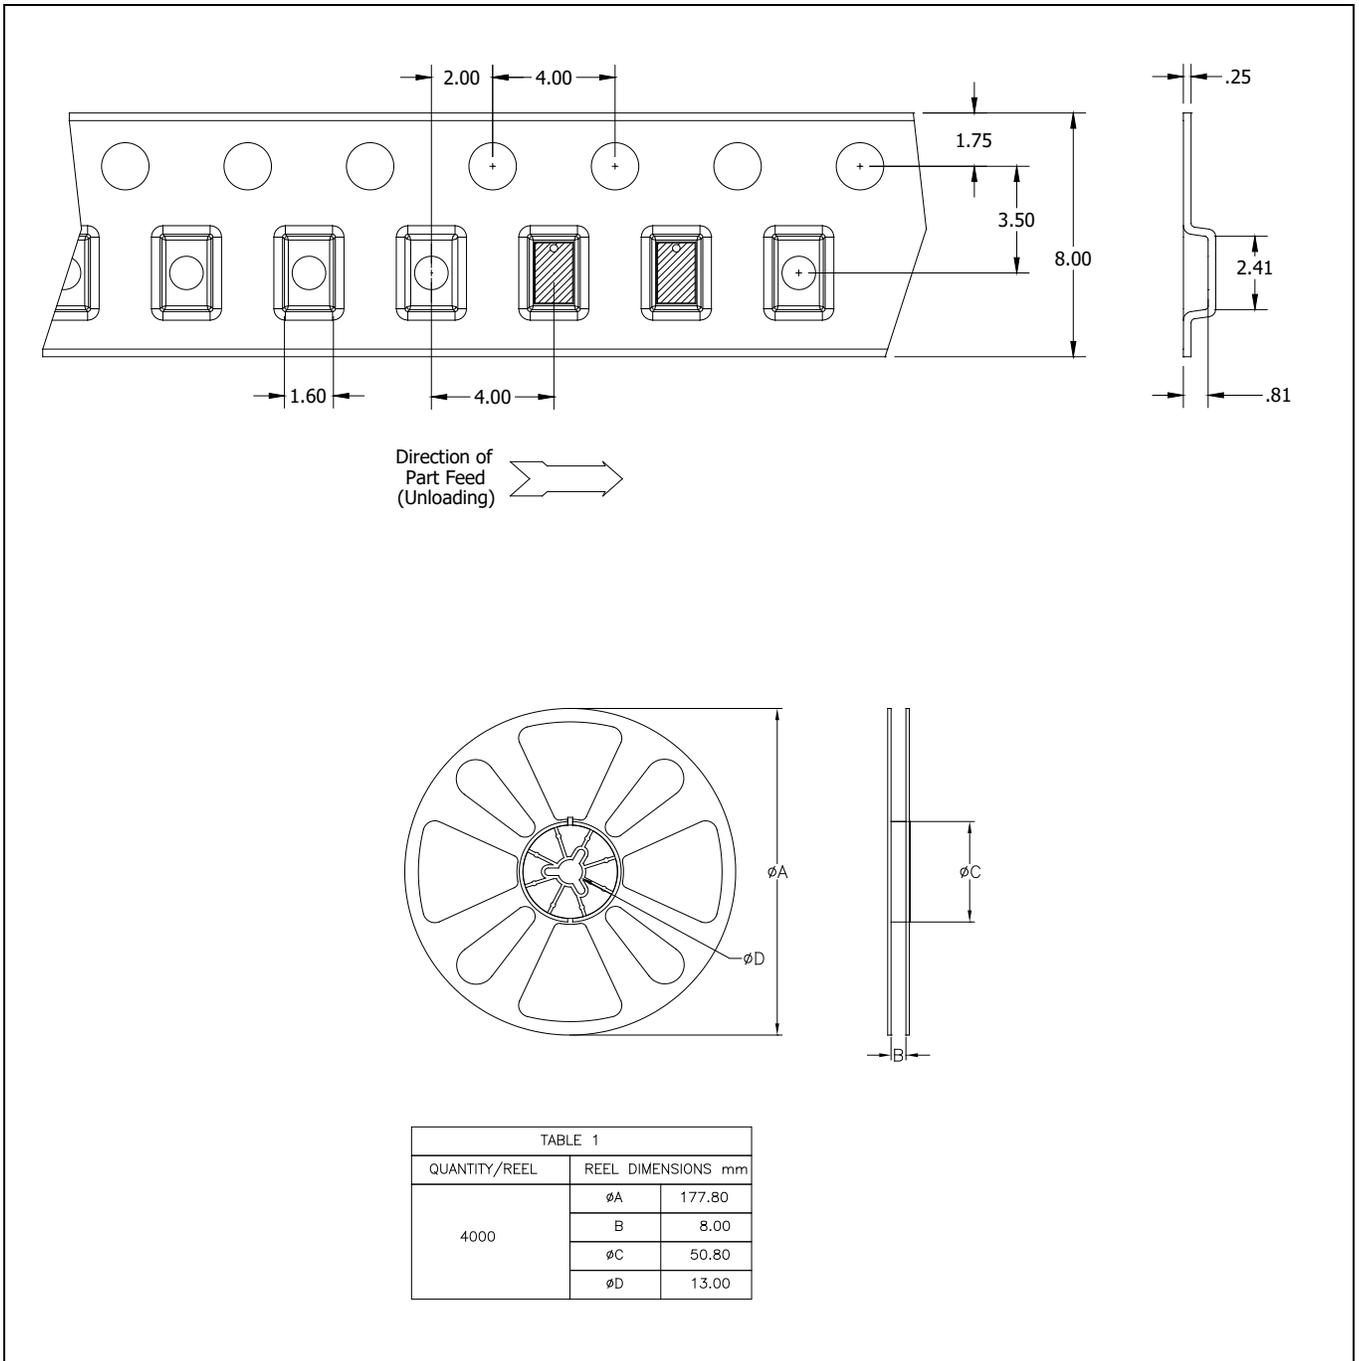

Contact us:
rf&s_support@ttm.com