


# Single Supply Quad Comparators

## LM339, LM339E, LM239, LM2901, LM2901E, LM2901V, NCV2901, MC3302


These comparators are designed for use in level detection, low-level sensing and memory applications in consumer, automotive, and industrial electronic applications.

### Features

- Single Supply Operation: 3.0 V to 36 V
- Split Supply Operation:  $\pm 1.5$  V to  $\pm 18$  V
- Low Input Bias Current: 25 nA (Typ)
- Low Input Offset Current:  $\pm 5.0$  nA (Typ)
- Low Input Offset Voltage
- Input Common Mode Voltage Range to GND
- Low Output Saturation Voltage: 130 mV (Typ) @ 4.0 mA
- TTL and CMOS Compatible
- ESD Clamps on the Inputs Increase Reliability without Affecting Device Operation
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant



### PIN CONNECTIONS

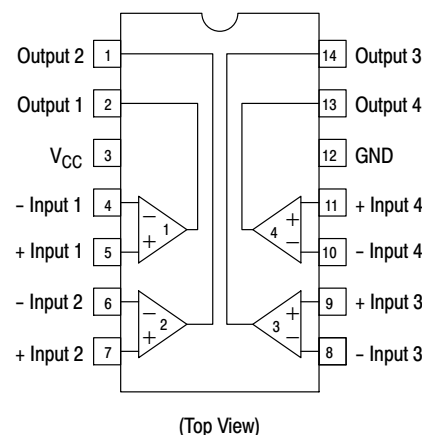

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

### DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 8 of this data sheet.

# LM339, LM339E, LM239, LM2901, LM2901E, LM2901V, NCV2901, MC3302

## MAXIMUM RATINGS


| Rating                                                                                                         | Symbol                     | Value                                                              | Unit                      |
|----------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------------------------------------------------|---------------------------|
| Power Supply Voltage<br>LM239/LM339, E/LM2901, E, V<br>MC3302                                                  | $V_{CC}$                   | +36 or $\pm 18$<br>+30 or $\pm 15$                                 | Vdc                       |
| Input Differential Voltage Range<br>LM239/LM339, E/LM2901, E, V<br>MC3302                                      | $V_{IDR}$                  | 36<br>30                                                           | Vdc                       |
| Input Common Mode Voltage Range                                                                                | $V_{ICMR}$                 | -0.3 to 36                                                         | Vdc                       |
| Output Short Circuit to Ground (Note 1)                                                                        | $I_{SC}$                   | Continuous                                                         |                           |
| Power Dissipation @ $T_A = 25^\circ\text{C}$<br>Plastic Package<br>Derate above $25^\circ\text{C}$             | $P_D$<br>$1/R_{\theta JA}$ | 1.0<br>8.0                                                         | W<br>mW/ $^\circ\text{C}$ |
| Junction Temperature                                                                                           | $T_J$                      | 150                                                                | $^\circ\text{C}$          |
| Operating Ambient Temperature Range<br>LM239<br>MC3302<br>LM2901, LM2901E<br>LM2901V, NCV2901<br>LM339, LM339E | $T_A$                      | -25 to +85<br>-40 to +85<br>-40 to +105<br>-40 to +125<br>0 to +70 | $^\circ\text{C}$          |
| Storage Temperature Range                                                                                      | $T_{stg}$                  | -65 to +150                                                        | $^\circ\text{C}$          |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The maximum output current may be as high as 20 mA, independent of the magnitude of  $V_{CC}$ . Output short circuits to  $V_{CC}$  can cause excessive heating and eventual destruction.

## ESD RATINGS

| Rating                                                                 | HBM  | MM  | Unit |
|------------------------------------------------------------------------|------|-----|------|
| ESD Protection at any Pin (Human Body Model – HBM, Machine Model – MM) |      |     |      |
| NCV2901                                                                | 2000 | 200 | V    |
| LM339E, LM2901E                                                        | 1500 | 200 | V    |
| LM339DG/DR2G, LM2901DG/DR2G                                            | 250  | 100 | V    |
| All Other Devices                                                      | 1500 | 200 | V    |

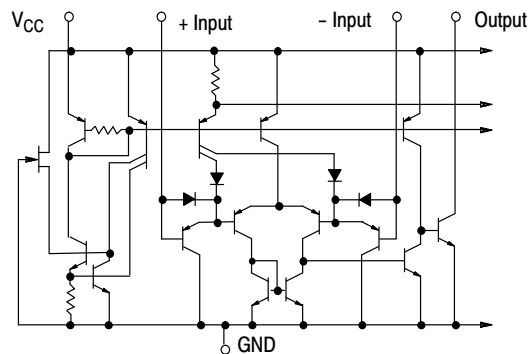

NOTE: Diagram shown is for 1 comparator.

Figure 1. Circuit Schematic

# LM339, LM339E, LM239, LM2901, LM2901E, LM2901V, NCV2901, MC3302

## ELECTRICAL CHARACTERISTICS (V<sub>CC</sub> = +5.0 Vdc, T<sub>A</sub> = +25°C, unless otherwise noted)

| Characteristic                                                                                                                                       | Symbol            | LM239/339/339E |      |                         | LM2901/2901E/2901V<br>/NCV2901 |      |                         | MC3302 |      |                         | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------|------|-------------------------|--------------------------------|------|-------------------------|--------|------|-------------------------|------|
|                                                                                                                                                      |                   | Min            | Typ  | Max                     | Min                            | Typ  | Max                     | Min    | Typ  | Max                     |      |
| Input Offset Voltage (Note 3)                                                                                                                        | V <sub>IO</sub>   | –              | ±2.0 | ±5.0                    | –                              | ±2.0 | ±7.0                    | –      | ±3.0 | ±20                     | mVdc |
| Input Bias Current (Notes 3, 4)<br>(Output in Analog Range)                                                                                          | I <sub>IB</sub>   | –              | 25   | 250                     | –                              | 25   | 250                     | –      | 25   | 500                     | nA   |
| Input Offset Current (Note 3)                                                                                                                        | I <sub>IO</sub>   | –              | ±5.0 | ±50                     | –                              | ±5.0 | ±50                     | –      | ±3.0 | ±100                    | nA   |
| Input Common Mode Voltage Range<br>(Note 5)                                                                                                          | V <sub>ICMR</sub> | 0              | –    | V <sub>CC</sub><br>–1.5 | 0                              | –    | V <sub>CC</sub><br>–1.5 | 0      | –    | V <sub>CC</sub><br>–1.5 | V    |
| Supply Current                                                                                                                                       | I <sub>CC</sub>   |                |      |                         |                                |      |                         |        |      |                         | mA   |
| R <sub>L</sub> = ∞ (For All Comparators)                                                                                                             |                   | –              | 0.8  | 2.0                     | –                              | 0.8  | 2.0                     | –      | 0.8  | 2.0                     |      |
| R <sub>L</sub> = ∞, V <sub>CC</sub> = 30 Vdc                                                                                                         |                   | –              | 1.0  | 2.5                     | –                              | 1.0  | 2.5                     | –      | 1.0  | 2.5                     |      |
| Voltage Gain<br>R <sub>L</sub> ≥ 15 kΩ, V <sub>CC</sub> = 15 Vdc                                                                                     | A <sub>VOL</sub>  | 50             | 200  | –                       | 25                             | 100  | –                       | 25     | 100  | –                       | V/mV |
| Large Signal Response Time<br>V <sub>I</sub> = TTL Logic Swing,<br>V <sub>ref</sub> = 1.4 Vdc, V <sub>RL</sub> = 5.0 Vdc,<br>R <sub>L</sub> = 5.1 kΩ | –                 | –              | 300  | –                       | –                              | 300  | –                       | –      | 300  | –                       | ns   |
| Response Time (Note 6)<br>V <sub>RL</sub> = 5.0 Vdc, R <sub>L</sub> = 5.1 kΩ                                                                         | –                 | –              | 1.3  | –                       | –                              | 1.3  | –                       | –      | 1.3  | –                       | μs   |
| Output Sink Current<br>V <sub>I</sub> (–) ≥ +1.0 Vdc, V <sub>I</sub> (+) = 0,<br>V <sub>O</sub> ≤ 1.5 Vdc                                            | I <sub>Sink</sub> | 6.0            | 16   | –                       | 6.0                            | 16   | –                       | 6.0    | 16   | –                       | mA   |
| Saturation Voltage<br>V <sub>I</sub> (–) ≥ +1.0 Vdc, V <sub>I</sub> (+) = 0,<br>I <sub>sink</sub> ≤ 4.0 mA                                           | V <sub>sat</sub>  | –              | 130  | 400                     | –                              | 130  | 400                     | –      | 130  | 500                     | mV   |
| Output Leakage Current<br>V <sub>I</sub> (+) ≥ +1.0 Vdc, V <sub>I</sub> (–) = 0,<br>V <sub>O</sub> = +5.0 Vdc                                        | I <sub>OL</sub>   | –              | 0.1  | –                       | –                              | 0.1  | –                       | –      | 0.1  | –                       | nA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


- (LM239) T<sub>low</sub> = –25°C, T<sub>high</sub> = +85°C  
(LM339, LM339E) T<sub>low</sub> = 0°C, T<sub>high</sub> = +70°C  
(MC3302) T<sub>low</sub> = –40°C, T<sub>high</sub> = +85°C  
(LM2901), LM2901E T<sub>low</sub> = –40°C, T<sub>high</sub> = +105°C  
(LM2901V & NCV2901) T<sub>low</sub> = –40°C, T<sub>high</sub> = +125°C  
*NCV2901 is qualified for automotive use.*
- At the output switch point, V<sub>O</sub> ≈ 1.4 Vdc, R<sub>S</sub> ≤ 100 Ω 5.0 Vdc ≤ V<sub>CC</sub> ≤ 30 Vdc, with the inputs over the full common mode range (0 Vdc to V<sub>CC</sub> – 1.5 Vdc).
- The bias current flows out of the inputs due to the PNP input stage. This current is virtually constant, independent of the output state.
- Positive excursions of input voltage may exceed the power supply level. As long as one input voltage remains within the common mode range, the comparator will provide a proper output state. Refer to the Maximum Ratings table for safe operating area.
- The response time specified is for a 100 mV input step with 5.0 mV overdrive. For larger signals, 300 ns is typical.

# LM339, LM339E, LM239, LM2901, LM2901E, LM2901V, NCV2901, MC3302


## PERFORMANCE CHARACTERISTICS (V<sub>CC</sub> = +5.0 Vdc, T<sub>A</sub> = T<sub>low</sub> to T<sub>high</sub> [Note 7])

| Characteristic                                                                                              | Symbol            | LM239/339/339E |     |                         | LM2901/2901E/2901V<br>/NCV2901 |     |                         | MC3302 |     |                         | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|----------------|-----|-------------------------|--------------------------------|-----|-------------------------|--------|-----|-------------------------|------|
|                                                                                                             |                   | Min            | Typ | Max                     | Min                            | Typ | Max                     | Min    | Typ | Max                     |      |
| Input Offset Voltage (Note 8)                                                                               | V <sub>IO</sub>   | –              | –   | ±9.0                    | –                              | –   | ±15                     | –      | –   | ±40                     | mVdc |
| Input Bias Current (Notes 8, 9)<br>(Output in Analog Range)                                                 | I <sub>IB</sub>   | –              | –   | 400                     | –                              | –   | 500                     | –      | –   | 1000                    | nA   |
| Input Offset Current (Note 8)                                                                               | I <sub>IO</sub>   | –              | –   | ±150                    | –                              | –   | ±200                    | –      | –   | ±300                    | nA   |
| Input Common Mode Voltage Range                                                                             | V <sub>ICMR</sub> | 0              | –   | V <sub>CC</sub><br>–2.0 | 0                              | –   | V <sub>CC</sub><br>–2.0 | 0      | –   | V <sub>CC</sub><br>–2.0 | V    |
| Saturation Voltage<br>V <sub>I</sub> (–) ≥ +1.0 Vdc, V <sub>I</sub> (+) = 0,<br>I <sub>sink</sub> ≤ 4.0 mA  | V <sub>sat</sub>  | –              | –   | 700                     | –                              | –   | 700                     | –      | –   | 700                     | mV   |
| Output Leakage Current<br>V <sub>I</sub> (+) ≥ +1.0 Vdc, V <sub>I</sub> (–) = 0,<br>V <sub>O</sub> = 30 Vdc | I <sub>OL</sub>   | –              | –   | 1.0                     | –                              | –   | 1.0                     | –      | –   | 1.0                     | μA   |
| Differential Input Voltage<br>All V <sub>I</sub> ≥ 0 Vdc                                                    | V <sub>ID</sub>   | –              | –   | V <sub>CC</sub>         | –                              | –   | V <sub>CC</sub>         | –      | –   | V <sub>CC</sub>         | Vdc  |

7. (LM239) T<sub>low</sub> = –25°C, T<sub>high</sub> = +85°C  
 (LM339, LM339E) T<sub>low</sub> = 0°C, T<sub>high</sub> = +70°C  
 (MC3302) T<sub>low</sub> = –40°C, T<sub>high</sub> = +85°C  
 (LM2901, LM2901E) T<sub>low</sub> = –40°C, T<sub>high</sub> = +105°C  
 (LM2901V & NCV2901) T<sub>low</sub> = –40°C, T<sub>high</sub> = +125°C  
 NCV2901 is qualified for automotive use.
8. At the output switch point, V<sub>O</sub> ≈ 1.4 Vdc, R<sub>S</sub> ≤ 100 Ω 5.0 Vdc ≤ V<sub>CC</sub> ≤ 30 Vdc, with the inputs over the full common mode range (0 Vdc to V<sub>CC</sub> – 1.5 Vdc).
9. The bias current flows out of the inputs due to the PNP input stage. This current is virtually constant, independent of the output state.

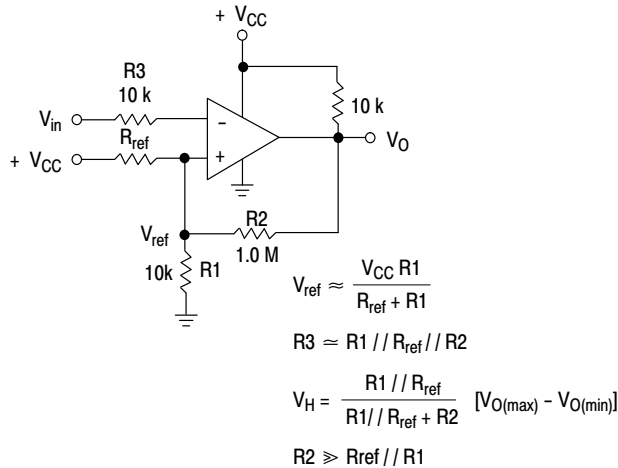

**Figure 2. Inverting Comparator with Hysteresis**

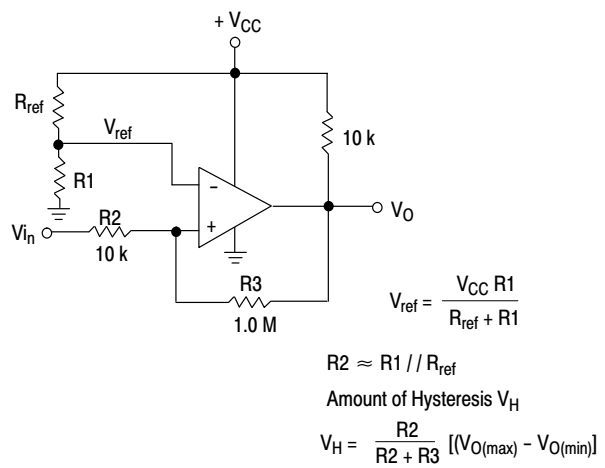

**Figure 3. Noninverting Comparator with Hysteresis**

### Typical Characteristics

( $V_{CC} = 15 \text{ Vdc}$ ,  $T_A = +25^\circ\text{C}$  (each comparator) unless otherwise noted.)

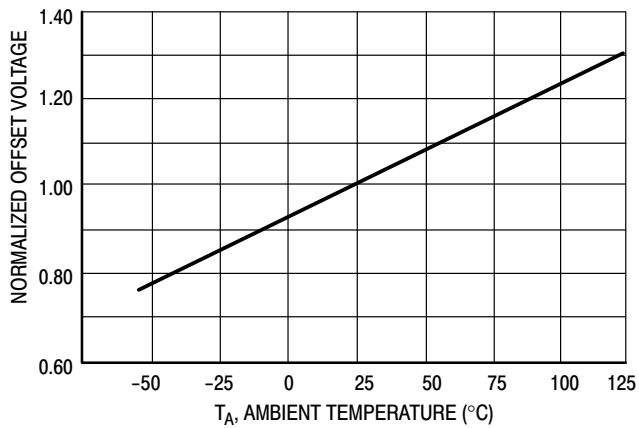


Figure 4. Normalized Input Offset Voltage

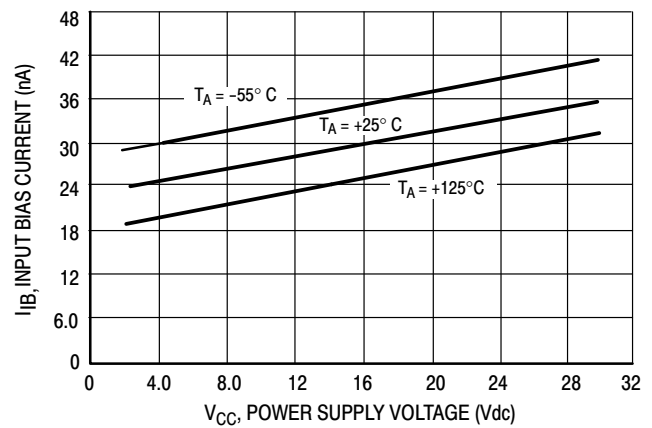


Figure 5. Input Bias Current


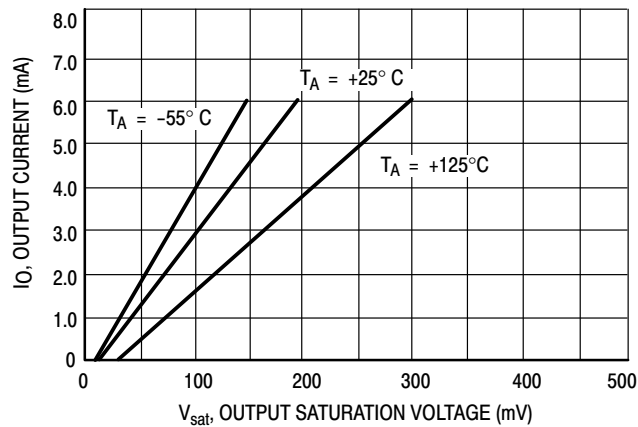


Figure 6. Output Sink Current versus Output Saturation Voltage

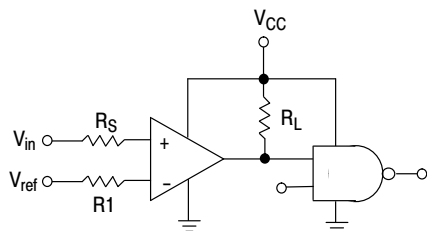

$R_S$  = Source Resistance  
 $R_1 \approx R_S$

| Logic | Device      | $V_{CC}$ (V) | $R_L$ k $\Omega$ |
|-------|-------------|--------------|------------------|
| CMOS  | 1/4 MC14001 | +15          | 100              |
| TTL   | 1/4 MC7400  | +5.0         | 10               |

Figure 7. Driving Logic

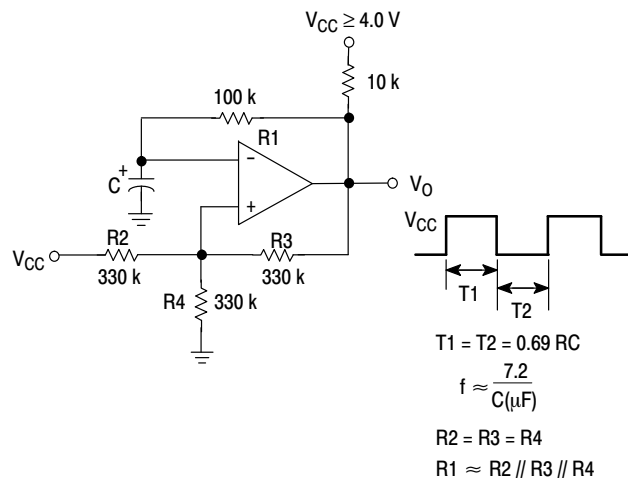



Figure 8. Squarewave Oscillator

## APPLICATIONS INFORMATION

These quad comparators feature high gain, wide bandwidth characteristics. This gives the device oscillation tendencies if the outputs are capacitively coupled to the inputs via stray capacitance. This oscillation manifests itself during output transitions ( $V_{OL}$  to  $V_{OH}$ ). To alleviate this situation input resistors  $< 10\text{ k}\Omega$  should be used. The

addition of positive feedback ( $< 10\text{ mV}$ ) is also recommended. It is good design practice to ground all unused input pins.

Differential input voltages may be larger than supply voltages without damaging the comparator's inputs. Voltages more negative than  $-300\text{ mV}$  should not be used.

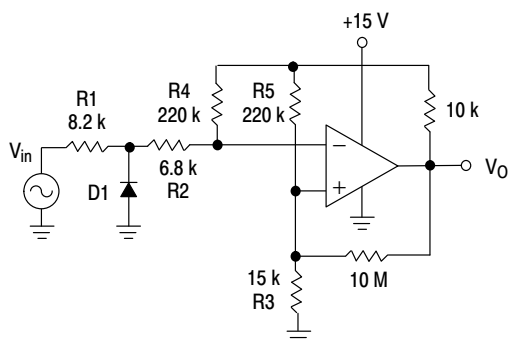


D1 prevents input from going negative by more than  $0.6\text{ V}$ .

$$R1 + R2 = R3$$

$$R3 \leq \frac{R5}{10} \text{ for small error in zero crossing}$$

**Figure 9. Zero Crossing Detector (Single Supply)**

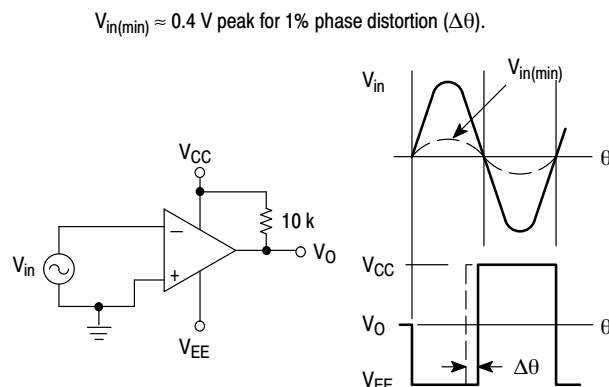

**Figure 10. Zero Crossing Detector (Split Supplies)**

# LM339, LM339E, LM239, LM2901, LM2901E, LM2901V, NCV2901, MC3302

## ORDERING INFORMATION


| Device         | Package            | Shipping†          |
|----------------|--------------------|--------------------|
| LM239DR2G      | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM239DTBR2G    | TSSOP-14 (Pb-Free) | 2500 / Tape & Reel |
| LM339DR2G      | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM339EDR2G     | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM339DTBR2G    | TSSOP-14 (Pb-Free) | 2500 / Tape & Reel |
| LM2901DR2G     | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM2901EDR2G    | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM2901DTBR2G   | TSSOP-14 (Pb-Free) | 2500 / Tape & Reel |
| LM2901VDR2G    | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| LM2901VDTBR2G  | TSSOP-14 (Pb-Free) | 2500 / Tape & Reel |
| NCV2901DR2G*   | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |
| NCV2901DTBR2G* | TSSOP-14 (Pb-Free) | 2500 / Tape & Reel |
| NCV2901CTR*    | Bare Die           | 6000 / Tape & Reel |
| MC3302DR2G     | SOIC-14 (Pb-Free)  | 2500 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


\*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

MARKING DIAGRAMS

SOIC-14  
D SUFFIX  
CASE 751A

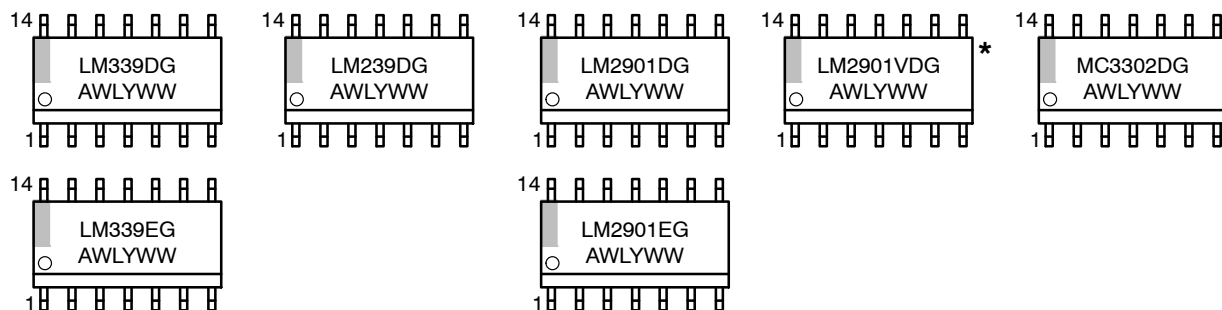

TSSOP-14  
DTB SUFFIX  
CASE 948G

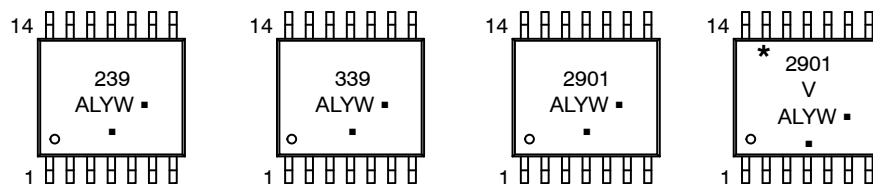


A = Assembly Location  
 WL, L = Wafer Lot  
 YY, Y = Year  
 WW, W = Work Week  
 G or ■ = Pb-Free Package  
 (Note: Microdot may be in either location)  
 \*This marking diagram also applies to NCV2901.

# MECHANICAL CASE OUTLINE


## PACKAGE DIMENSIONS

ON Semiconductor®

ON



SCALE 1:1

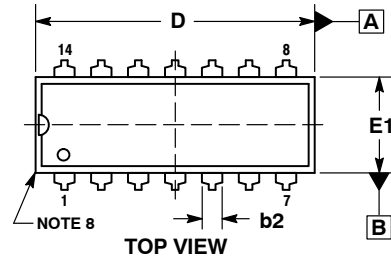


TOP VIEW

PDIP-14  
CASE 646-06  
ISSUE S


DATE 22 APR 2015

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSIONS A, A1 AND L ARE MEASURED WITH THE PACKAGE SEATED IN JEDEC SEATING PLANE GAUGE GS-3.
4. DIMENSIONS D, D1 AND E1 DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS ARE NOT TO EXCEED 0.10 INCH.
5. DIMENSION E IS MEASURED AT A POINT 0.015 BELOW DATUM PLANE H WITH THE LEADS CONSTRAINED PERPENDICULAR TO DATUM C.
6. DIMENSION eB IS MEASURED AT THE LEAD TIPS WITH THE LEADS UNCONSTRAINED.
7. DATUM PLANE H IS COINCIDENT WITH THE BOTTOM OF THE LEADS, WHERE THE LEADS EXIT THE BODY.
8. PACKAGE CONTOUR IS OPTIONAL (ROUNDED OR SQUARE CORNERS).



END VIEW  
WITH LEADS CONSTRAINED  
NOTE 5

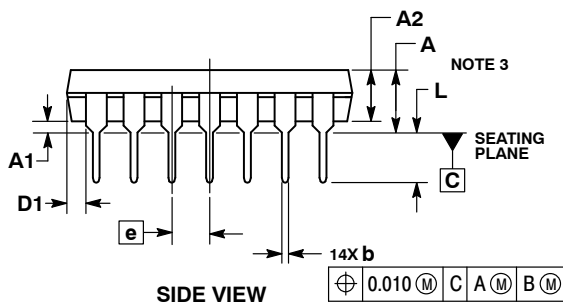

SIDE VIEW



END VIEW  
NOTE 6

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | ----      | 0.210 | ----        | 5.33  |
| A1  | 0.015     | ----  | 0.38        | ----  |
| A2  | 0.115     | 0.195 | 2.92        | 4.95  |
| b   | 0.014     | 0.022 | 0.35        | 0.56  |
| b2  | 0.060 TYP |       | 1.52 TYP    |       |
| C   | 0.008     | 0.014 | 0.20        | 0.36  |
| D   | 0.735     | 0.775 | 18.67       | 19.69 |
| D1  | 0.005     | ----  | 0.13        | ----  |
| E   | 0.300     | 0.325 | 7.62        | 8.26  |
| E1  | 0.240     | 0.280 | 6.10        | 7.11  |
| e   | 0.100 BSC |       | 2.54 BSC    |       |
| eB  | ----      | 0.430 | ----        | 10.92 |
| L   | 0.115     | 0.150 | 2.92        | 3.81  |
| M   | ----      | 10°   | ----        | 10°   |

### GENERIC MARKING DIAGRAM\*



STYLES ON PAGE 2

XXXXX = Specific Device Code  
A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42428B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | PDIP-14     | PAGE 1 OF 2                                                                                                                                                                         |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

PDIP-14  
CASE 646-06  
ISSUE S

DATE 22 APR 2015


|                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STYLE 1:<br>PIN 1. COLLECTOR<br>2. BASE<br>3. EMITTER<br>4. NO<br>CONNECTION<br>5. EMITTER<br>6. BASE<br>7. COLLECTOR<br>8. COLLECTOR<br>9. BASE<br>10. EMITTER<br>11. NO<br>CONNECTION<br>12. EMITTER<br>13. BASE<br>14. COLLECTOR                                                                       | STYLE 2:<br>CANCELLED                                                                                                                                                                                                                                                                                            | STYLE 3:<br>CANCELLED                                                                                                                                                                                                                         | STYLE 4:<br>PIN 1. DRAIN<br>2. SOURCE<br>3. GATE<br>4. NO<br>CONNECTION<br>5. GATE<br>6. SOURCE<br>7. DRAIN<br>8. DRAIN<br>9. SOURCE<br>10. GATE<br>11. NO<br>CONNECTION<br>12. GATE<br>13. SOURCE<br>14. DRAIN                                                                                            |
| STYLE 5:<br>PIN 1. GATE<br>2. DRAIN<br>3. SOURCE<br>4. NO CONNECTION<br>5. SOURCE<br>6. DRAIN<br>7. GATE<br>8. GATE<br>9. DRAIN<br>10. SOURCE<br>11. NO CONNECTION<br>12. SOURCE<br>13. DRAIN<br>14. GATE                                                                                                 | STYLE 6:<br>PIN 1. COMMON CATHODE<br>2. ANODE/CATHODE<br>3. ANODE/CATHODE<br>4. NO CONNECTION<br>5. ANODE/CATHODE<br>6. NO CONNECTION<br>7. ANODE/CATHODE<br>8. ANODE/CATHODE<br>9. ANODE/CATHODE<br>10. NO CONNECTION<br>11. ANODE/CATHODE<br>12. ANODE/CATHODE<br>13. NO CONNECTION<br>14. COMMON ANODE        | STYLE 7:<br>PIN 1. NO CONNECTION<br>2. ANODE<br>3. ANODE<br>4. NO CONNECTION<br>5. ANODE<br>6. NO CONNECTION<br>7. ANODE<br>8. ANODE<br>9. ANODE<br>10. NO CONNECTION<br>11. ANODE<br>12. ANODE<br>13. NO CONNECTION<br>14. COMMON<br>CATHODE | STYLE 8:<br>PIN 1. NO CONNECTION<br>2. CATHODE<br>3. CATHODE<br>4. NO CONNECTION<br>5. CATHODE<br>6. NO CONNECTION<br>7. CATHODE<br>8. CATHODE<br>9. CATHODE<br>10. NO CONNECTION<br>11. CATHODE<br>12. CATHODE<br>13. NO CONNECTION<br>14. COMMON ANODE                                                   |
| STYLE 9:<br>PIN 1. COMMON CATHODE<br>2. ANODE/CATHODE<br>3. ANODE/CATHODE<br>4. NO CONNECTION<br>5. ANODE/CATHODE<br>6. ANODE/CATHODE<br>7. COMMON ANODE<br>8. COMMON ANODE<br>9. ANODE/CATHODE<br>10. ANODE/CATHODE<br>11. NO CONNECTION<br>12. ANODE/CATHODE<br>13. ANODE/CATHODE<br>14. COMMON CATHODE | STYLE 10:<br>PIN 1. COMMON<br>CATHODE<br>2. ANODE/CATHODE<br>3. ANODE/CATHODE<br>4. ANODE/CATHODE<br>5. ANODE/CATHODE<br>6. NO CONNECTION<br>7. COMMON ANODE<br>8. COMMON<br>CATHODE<br>9. ANODE/CATHODE<br>10. ANODE/CATHODE<br>11. ANODE/CATHODE<br>12. ANODE/CATHODE<br>13. NO CONNECTION<br>14. COMMON ANODE | STYLE 11:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. CATHODE<br>4. CATHODE<br>5. CATHODE<br>6. CATHODE<br>7. CATHODE<br>8. ANODE<br>9. ANODE<br>10. ANODE<br>11. ANODE<br>12. ANODE<br>13. ANODE<br>14. ANODE                                      | STYLE 12:<br>PIN 1. COMMON CATHODE<br>2. COMMON ANODE<br>3. ANODE/CATHODE<br>4. ANODE/CATHODE<br>5. ANODE/CATHODE<br>6. COMMON ANODE<br>7. COMMON CATHODE<br>8. ANODE/CATHODE<br>9. ANODE/CATHODE<br>10. ANODE/CATHODE<br>11. ANODE/CATHODE<br>12. ANODE/CATHODE<br>13. ANODE/CATHODE<br>14. ANODE/CATHODE |

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42428B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | PDIP-14     | PAGE 2 OF 2                                                                                                                                                                         |

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS


ON Semiconductor®



SCALE 1:1

SOIC-14 NB  
CASE 751A-03  
ISSUE L

DATE 03 FEB 2016

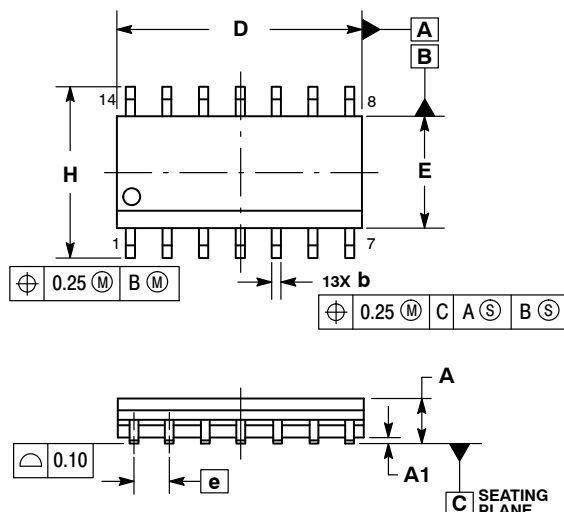


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.13 TOTAL IN EXCESS OF AT MAXIMUM MATERIAL CONDITION.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSIONS.
5. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 1.35        | 1.75 | 0.054     | 0.068 |
| A1  | 0.10        | 0.25 | 0.004     | 0.010 |
| A3  | 0.19        | 0.25 | 0.008     | 0.010 |
| b   | 0.35        | 0.49 | 0.014     | 0.019 |
| D   | 8.55        | 8.75 | 0.337     | 0.344 |
| E   | 3.80        | 4.00 | 0.150     | 0.157 |
| e   | 1.27 BSC    |      | 0.050 BSC |       |
| H   | 5.80        | 6.20 | 0.228     | 0.244 |
| h   | 0.25        | 0.50 | 0.010     | 0.019 |
| L   | 0.40        | 1.25 | 0.016     | 0.049 |
| M   | 0°          | 7°   | 0°        | 7°    |


## SOLDERING FOOTPRINT\*

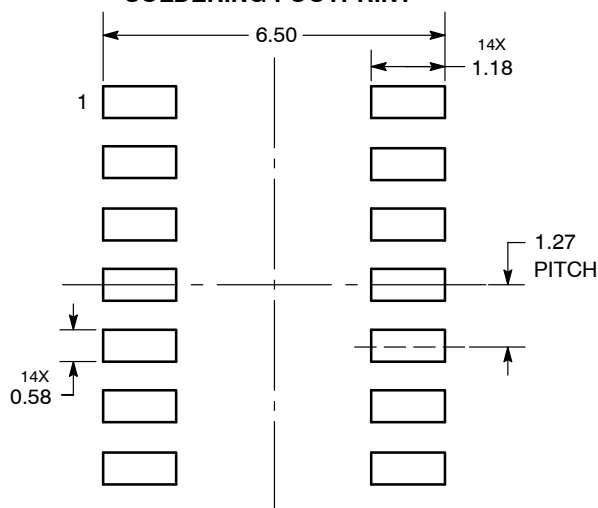

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## GENERIC MARKING DIAGRAM\*



XXXXXX = Specific Device Code  
A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

STYLES ON PAGE 2

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42565B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-14 NB  | PAGE 1 OF 2                                                                                                                                                                         |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**SOIC-14**  
**CASE 751A-03**  
**ISSUE L**

**DATE 03 FEB 2016**

**STYLE 1:**  
PIN 1. COMMON CATHODE  
2. ANODE/CATHODE  
3. ANODE/CATHODE  
4. NO CONNECTION  
5. ANODE/CATHODE  
6. NO CONNECTION  
7. ANODE/CATHODE  
8. ANODE/CATHODE  
9. ANODE/CATHODE  
10. NO CONNECTION  
11. ANODE/CATHODE  
12. ANODE/CATHODE  
13. NO CONNECTION  
14. COMMON ANODE

**STYLE 2:**  
CANCELLED

**STYLE 3:**  
PIN 1. NO CONNECTION  
2. ANODE  
3. ANODE  
4. NO CONNECTION  
5. ANODE  
6. NO CONNECTION  
7. ANODE  
8. ANODE  
9. ANODE  
10. NO CONNECTION  
11. ANODE  
12. ANODE  
13. NO CONNECTION  
14. COMMON CATHODE

**STYLE 4:**  
PIN 1. NO CONNECTION  
2. CATHODE  
3. CATHODE  
4. NO CONNECTION  
5. CATHODE  
6. NO CONNECTION  
7. CATHODE  
8. CATHODE  
9. CATHODE  
10. NO CONNECTION  
11. CATHODE  
12. CATHODE  
13. NO CONNECTION  
14. COMMON ANODE

**STYLE 5:**  
PIN 1. COMMON CATHODE  
2. ANODE/CATHODE  
3. ANODE/CATHODE  
4. ANODE/CATHODE  
5. ANODE/CATHODE  
6. NO CONNECTION  
7. COMMON ANODE  
8. COMMON CATHODE  
9. ANODE/CATHODE  
10. ANODE/CATHODE  
11. ANODE/CATHODE  
12. ANODE/CATHODE  
13. NO CONNECTION  
14. COMMON ANODE

**STYLE 6:**  
PIN 1. CATHODE  
2. CATHODE  
3. CATHODE  
4. CATHODE  
5. CATHODE  
6. CATHODE  
7. CATHODE  
8. ANODE  
9. ANODE  
10. ANODE  
11. ANODE  
12. ANODE  
13. ANODE  
14. ANODE

**STYLE 7:**  
PIN 1. ANODE/CATHODE  
2. COMMON ANODE  
3. COMMON CATHODE  
4. ANODE/CATHODE  
5. ANODE/CATHODE  
6. ANODE/CATHODE  
7. ANODE/CATHODE  
8. ANODE/CATHODE  
9. ANODE/CATHODE  
10. ANODE/CATHODE  
11. COMMON CATHODE  
12. COMMON ANODE  
13. ANODE/CATHODE  
14. ANODE/CATHODE

**STYLE 8:**  
PIN 1. COMMON CATHODE  
2. ANODE/CATHODE  
3. ANODE/CATHODE  
4. NO CONNECTION  
5. ANODE/CATHODE  
6. ANODE/CATHODE  
7. COMMON ANODE  
8. COMMON ANODE  
9. ANODE/CATHODE  
10. ANODE/CATHODE  
11. NO CONNECTION  
12. ANODE/CATHODE  
13. ANODE/CATHODE  
14. COMMON CATHODE

**DOCUMENT NUMBER:** 98ASB42565B

Electronic versions are uncontrolled except when accessed directly from the Document Repository.  
Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SOIC-14 NB


**PAGE 2 OF 2**

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

ON Semiconductor®


ON



SCALE 2:1

**TSSOP-14 WB**  
CASE 948G  
ISSUE C

DATE 17 FEB 2016

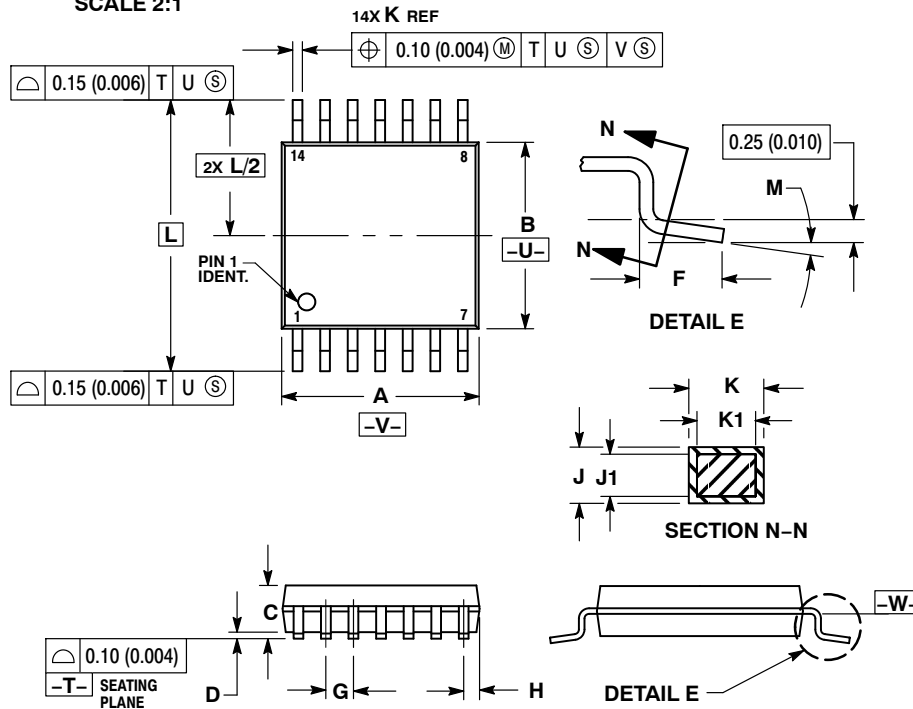


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

## GENERIC MARKING DIAGRAM\*




- A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

## SOLDERING FOOTPRINT

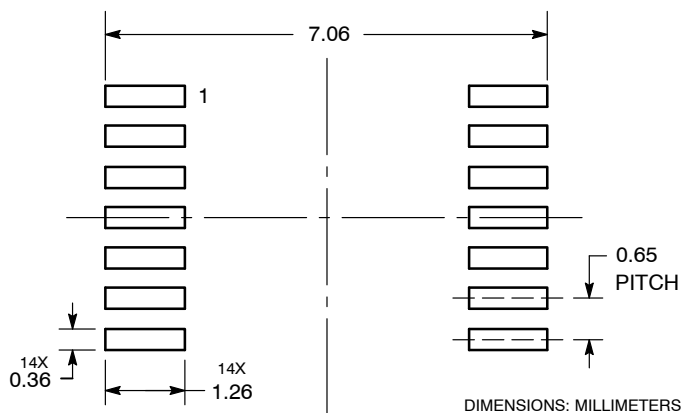

DOCUMENT NUMBER: 98ASH70246A

Electronic versions are uncontrolled except when accessed directly from the Document Repository.  
Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

DESCRIPTION: TSSOP-14 WB

PAGE 1 OF 1

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative