

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/15	

6

5

4






3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

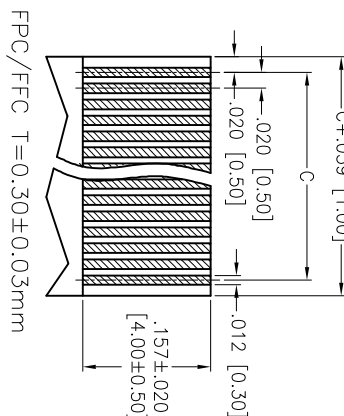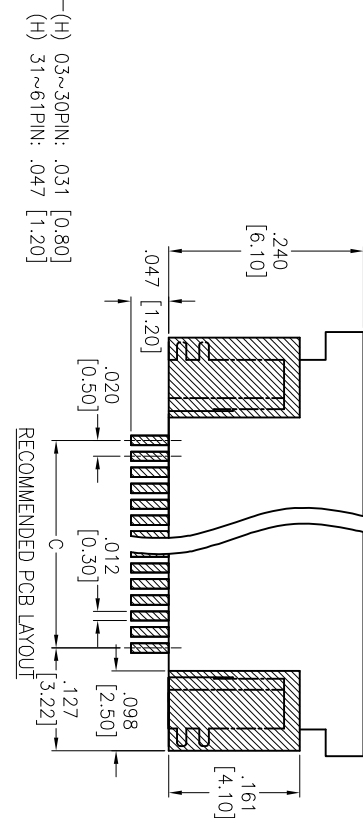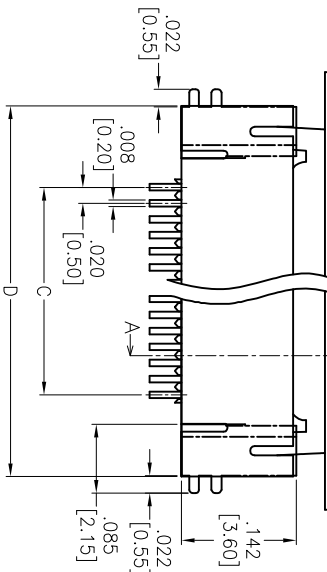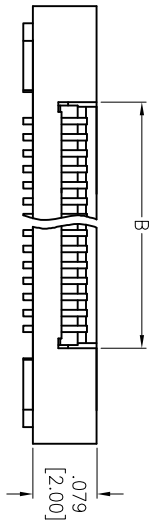

PACKAGED ON TAPE & REEL

- Positions: 03 thru 61
- A = .020 [0.50] x No. of Spaces + .283 [7.20]
 - B = .020 [0.50] x No. of Spaces + .043 [1.10]
 - C = .020 [0.50] x No. of Spaces
 - D = .020 [0.50] x No. of Spaces + .201 [5.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLE SIZES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

DRAWN	AY	3/16/15	DATE
CHECKED	GC	3/16/15	DATE
APPROVED			

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE
SIDE ENTRY, UPPER CONTACT

SIZE	PART NO.	REV.
X	PCA-6-LA-XX-HU-3-TR	-
REF:	S00169C	SHEET 1 OF 1

SPECIFICATIONS:

- Material: Insulator: HI-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Actuator: HI-temp thermoplastic, rated UL 94V-0, Color: Black
Contacts: Phosphor Bronze
Holddown: Brass, Tin plated
Plating: Tin over Nickel underplate overall
Electrical: Current rating: 0.5 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 250V AC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant

SECTION A-A

6

5

4

3

2

1

