

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/19/06	
A		UPDATED DIMENSION	10/2/07	
B		REDRAWN	06/04/12	

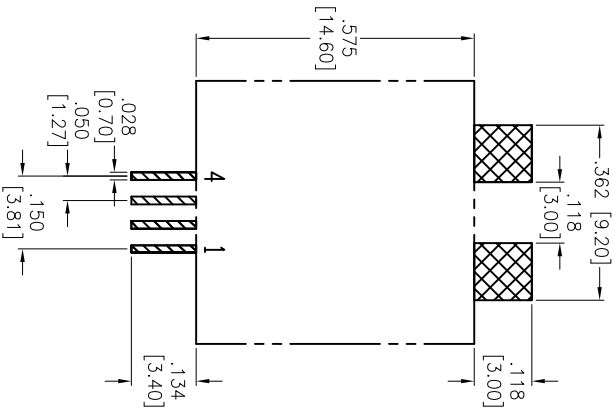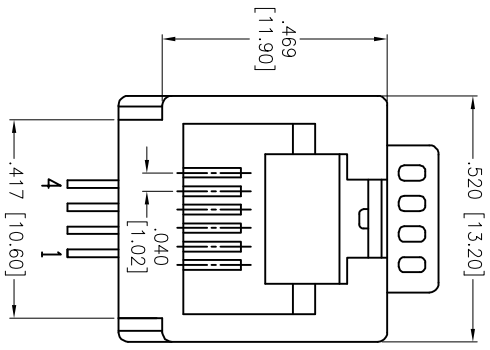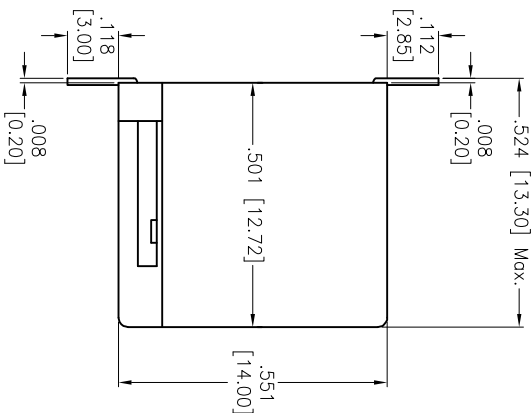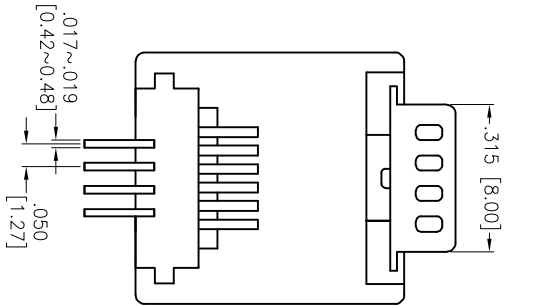

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate on contact area,
 Tin over Copper underplate on SMT tails.

Electrical:

Operating voltage: 150V AC max

Current rating: 1.5 Amps max

Contact resistance: 20m ohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE

DRAWN: SS 6/19/06
 CHECKED: _____
 APPROVED: _____

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TELEPHONE JACK, SMT, TOP ENTRY,
 6P4G, SURFACE MOUNT

SIZE	PART NO.	REV.
X	MTJ-64HX1	B

REF: S00068T SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1