
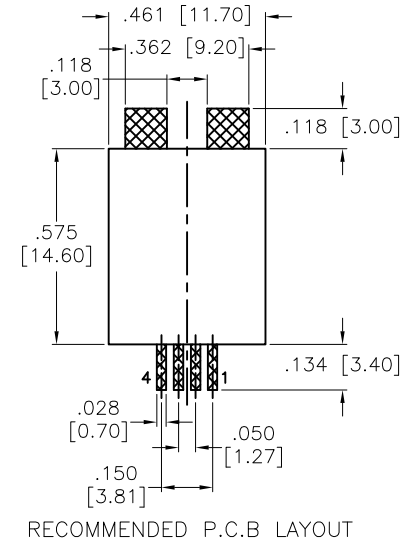
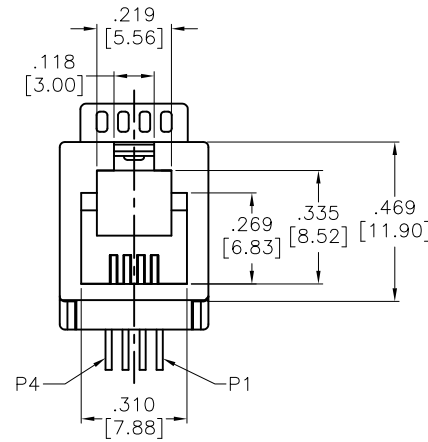


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	7426	RELEASED	01/11/07	
A		REDRAWN	10/5/11	
B		UPDATE DRAWING	4/11/16	AY/JK
C		UPDATED SPEC.	9/12/18	HR/LW

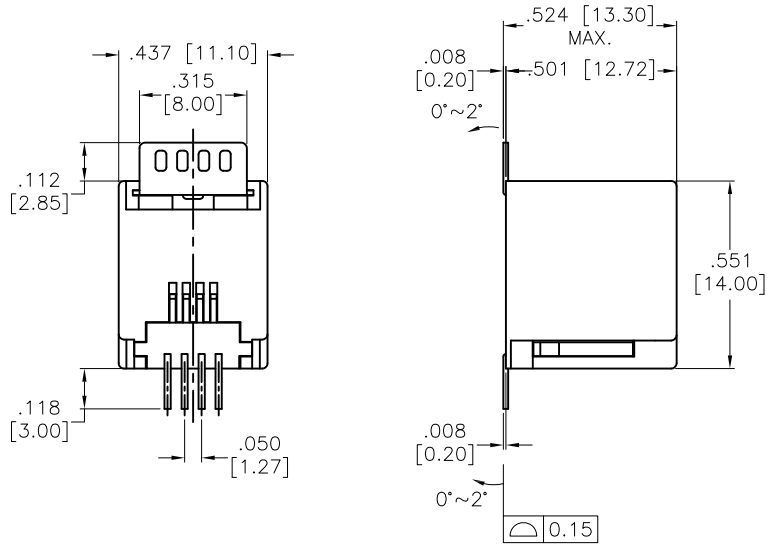

**SPECIFICATIONS:**

**Material:**  
 Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Hold Down: Brass, Matte Tin plated  
**Plating:**

Gold over Nickel underplate on contact area  
 Gold flash over Nickel underplate on solder tails  
**Electrical:**

Voltage rating: 150 VAC max  
 Current rating: 1.5 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -40°C to +85°C  
**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES

.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

**ADAM TECH** INTERCONNECTS  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	BW	01/11/07
CHECKED		
APPROVED		

TITLE TELEPHONE JACK, SMT, TOP ENTRY, 4P4C, SURFACE MOUNT			
SIZE X	PART NO. MTJ-44HX1	REV. C	
REF: S00065T	SCALE: NTS	SHEET 1 OF 1	