

PART NUMBER CODING

S_C02SYAN

PLATING


T= TIN OVER COPPER UNDERPLATE OVERALL.

P= GOLD FLASH OVER NICKEL UNDERPLATE OVERALL.

S= 0.000010" GOLD OVER NICKEL UNDERPLATE OVERALL.

REVISIONS

REV.	ECO. NO	DESCRIPTION	DATE	BY
B	1821	UPDATE 'T' & 'P' PLATING, ADD 'S' PLATING, CURRENT RATING 3 AMP WAS 1 AMP, ADD 'DUAL BEAM CONTACTS' TEXT, .226 MAX DEPTH WAS .236, LENGTH .200 WAS .197, WIDTH .100 WAS .094 REMOVE TEXT '-RC' IN P/N CODING	11/4/2008	JH
C	1903	UPDATE TOLERANCE BLOCK, RELOCATE BTM VIEW, SPECIFICATION 20 MILLI OHMS WAS 20 MEGA OHMS	1/23/2009	JH
D	4786	REMOVE DWV AND OPERATING VOLTAGE NOTES	6/26/2024	JH

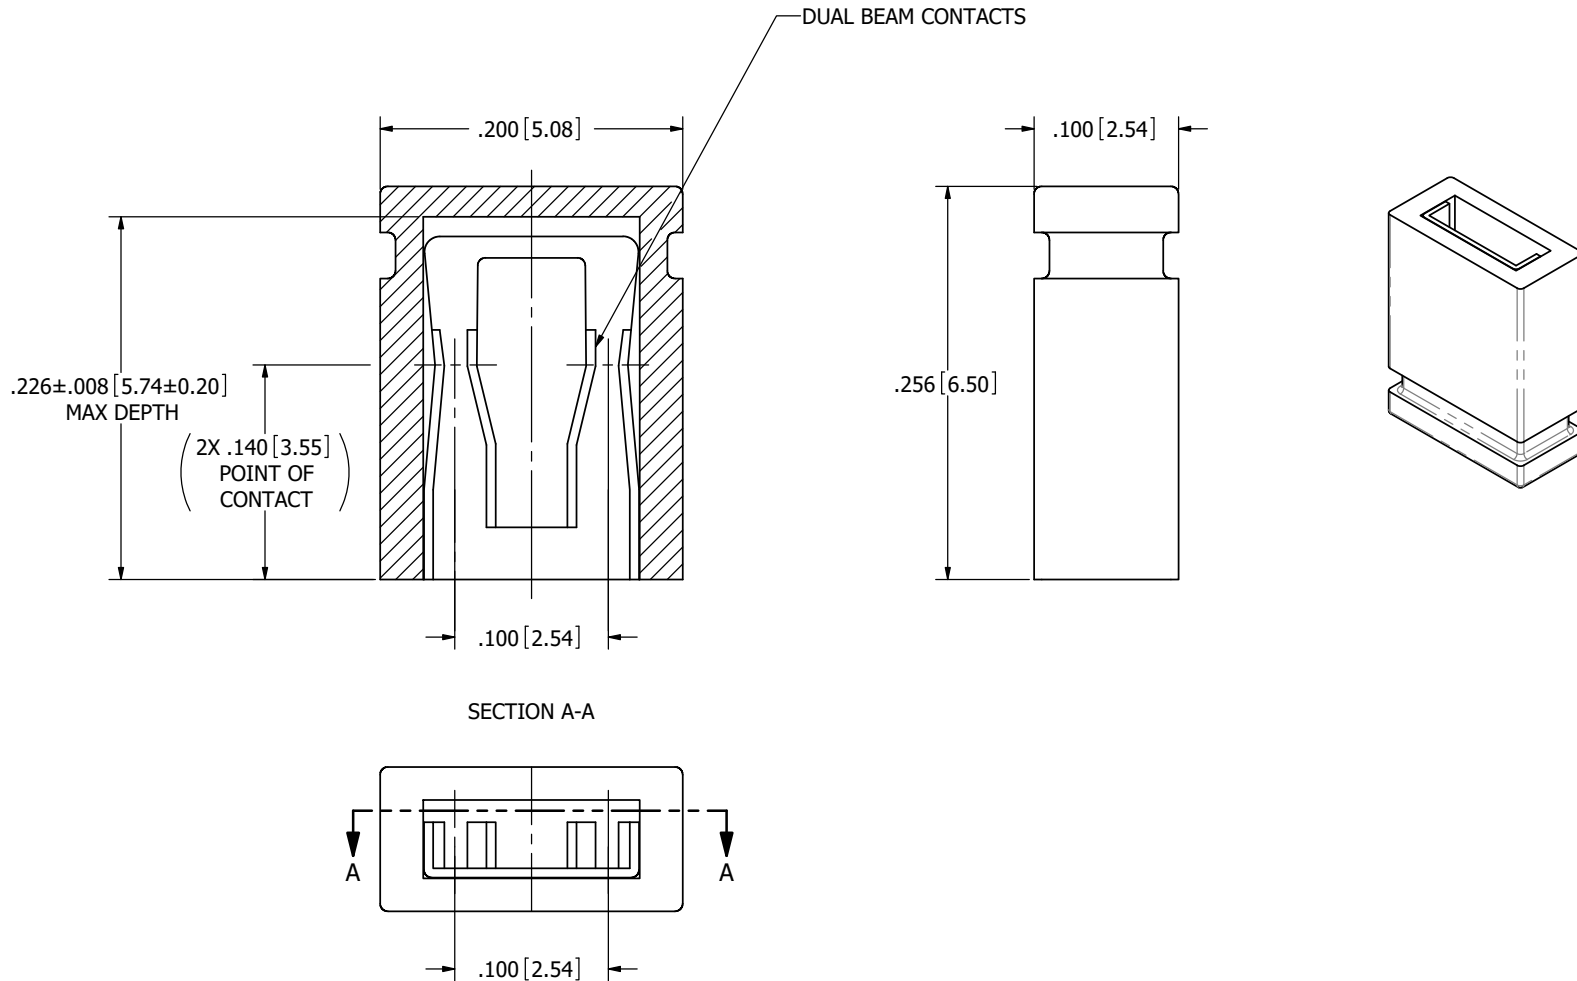

NOTES:

1. INSULATOR MATERIAL: PBT, BLACK
2. CONTACT MATERIAL: PHOSPHOR BRONZE.
3. PLATING: SEE PART NUMBER CODING.
4. OPERATING TEMPERATURE: -55°C TO +105°C.
5. UL FLAMMABILITY RATING: 94V-0.
6. CURRENT RATING: 3 AMP PER CONTACT.
7. CONTACT RESISTANCE: 20 MILLI OHMS MAX.
8. INSULATION RESISTANCE: 5000 MEGA OHMS.



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)	DRAWN	DATE	NAME	
		7/16/2010	LH	
TOLERANCES: ANGULAR: ± 1° DECIMALS .XX = ± .012 [.30] .XXX = ± .008 [.20] .XXXX = ± .004 [.10]				THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.
TITLE MINI SHUNT, CLOSED TOP				PART NUMBER S_C02SYAN
SIZE	CAGE CODE	DWG. NO.	REV	
C	54453	11134	D	
SCALE: 24:1			SHEET 1 OF 1	