
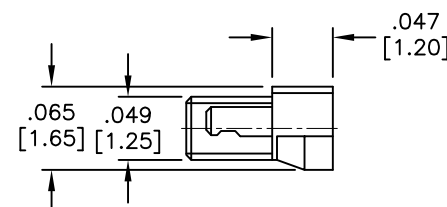
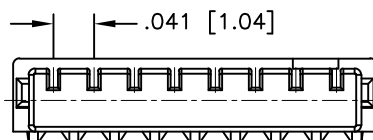


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/1/17	

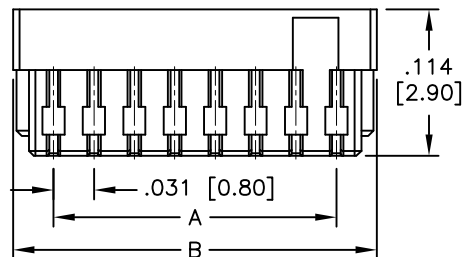

SPECIFICATIONS:

Material:

Insulator: Polyamide, rated UL 94V-0,

Insulator color: Natural

Contacts: Copper Alloy

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 30V DC

Current rating: 0.5A AC/DC (32 Awg wire)

0.2A AC/DC (36 Awg wire)

Contact resistance: 20 mohms max

Insulation resistance: 100MΩ min

Dielectric withstanding voltage: 200V AC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 20, 22

A = .031 [0.80] x No. of Spaces

B = .031 [0.80] x No. of Spaces + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	11/1/17
CHECKED	RC1	11/1/17
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 0.8mm HOUSING IDC TYPE, GOLD PLATED

SIZE X	PART NO. 08CH-A-XX-G-IDC	REV. -
REF: S00015T	SCALE: NTS	SHEET 1 OF 1