


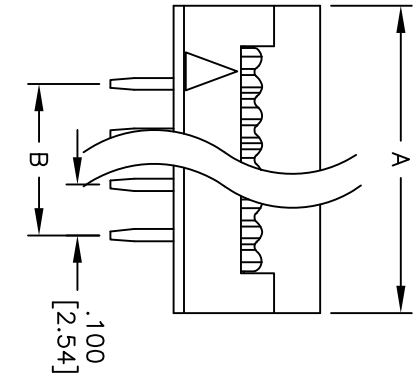


APPROVED: _____
DATE: _____ TITLE: _____

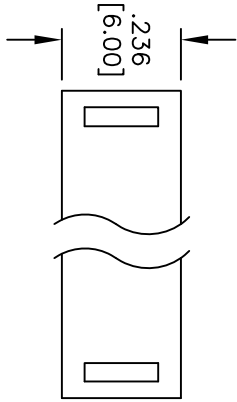

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/04	
		ADDED ROHS LOGO	02/14/07	BAS
A		ADDED 6 POSITION	10/16/08	SS
B		REDRAWN	12/24/10	

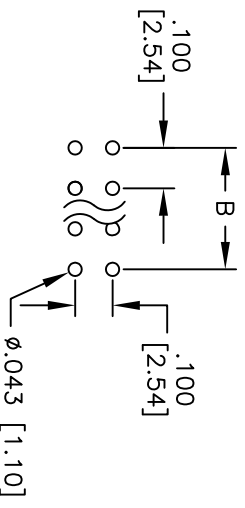

RECOMMENDED PCB LAYOUT

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 24, 26, 30, 34, 36, 40, 50, 60, 64
A = .100 [2.54] x No. of Spaces per Row + .315 [7.99]
B = .100 [2.54] x No. of Spaces per Row

SPECIFICATIONS:

Material: Insulator: PBT, glass filled, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 250 VAC max.
Current rating: 1 Amp max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 1,000 Mohms min @ 500 VDC.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE IDC DIP PLUG, .100 [2.54] X .100 [2.54] PITCH TIN PLATED			
.X INCHES	± .10	ØX HOLE	± .10	SIZE	PART NO.	REV.	
.XX INCHES	± .020	ØXX	± .015	X	FTR-XX-T	B	
.XXX INCHES	± .015	ØXXX	± .010	REF: S00087T	SCALE: NTS	SHEET 1 OF 1	
APPROVALS	DATE						
DRAWN	SS	11/16/04					
CHECKED							
APPROVED							