


Automotive MLCC, KAM Series

General Specifications



GENERAL DESCRIPTION

KYOCERA AVX has supported the Automotive Industry requirements for Multilayer Ceramic Capacitors consistently for more than 25 years. Products have been developed and tested specifically for automotive applications and all manufacturing facilities are QS9000 and VDA 6.4 approved.

KYOCERA AVX is using AECQ200 as the qualification vehicle for this transition. A detailed qualification package is available on request and contains results on a range of part numbers.

The KAM series are plated with a Nickel/Tin finish. For FLEXITERM® please refer to the KAF series datasheet.

HOW TO ORDER

| | | | | | | | |
|----------------------------------|---|---------------|--|---|---|--|-----------------|
| KAM | 31 | G | R7 | 1H | 475 | K | U |
| Series | Size | Thickness | Dielectric | Voltage | Capacitance Code Code (in pF) | Capacitance Tolerance | Packaging |
| AEC-Q200 Tin Nickel Finish | 03 = 0201 05 = 0402 15 = 0603 21 = 0805 31 = 1206 32 = 1210 42 = 1808 43 = 1812 55 = 2220 | See Cap Chart | CG = COG R7 = X7R S7 = X7S T7 = X7T R8 = X8R L8 = X8L G8 = X8G | 0G = 4V 0J = 6.3V 1A = 10V 1C = 16V 1E = 25V 1H = 50V 2A = 100V 2D = 200V 2E = 250V 2H = 500V 2J = 630V 3A = 1000V 3N = 1500V 3D = 2000V 3E = 2500V 3U = 3000V | 2 Significant Digits +Number of zeros eg 10uF = 106 10nF = 103 47pF = 470 | B = ± 0.1pF (<10pF)* C = ± 0.25pF (<10pF)* D = ± 0.5pF (<10pF)* F = ± 1%* G = ± 2%* J = ± 5% K = ± 10% M = ± 20% *COG only | See Table Below |

PACKAGING CODES

| Code | EIA (inch) | IEC(mm) | 7" Paper | 7" Embossed | 13" Paper | 13" Embossed |
|------|------------|---------|----------|-------------|-----------|--------------|
| 03 | 0201 | 0603 | H | | N | |
| 05 | 0402 | 1005 | H | | N | |
| 15 | 0603 | 1608 | T | U | M | L |
| 21 | 0805 | 2012 | T | U | M | L |
| 31 | 1206 | 3216 | T | U | M | L |
| 32 | 1210 | 3225 | T | U | M | L |
| 42 | 1808 | 4520 | | Y | | K |
| 43 | 1812 | 4532 | | V | | S |
| 55 | 2220 | 5750 | | V | | S |

*thickness determines paper or plastic embossed packaging

DIELECTRIC

| Dielectric | Operating Temperature (°C) | Capacitance Change Rate |
|------------|----------------------------|-------------------------|
| X7R | -55~+125 | ±15% |
| X7T | -55~+125 | ±22/-33% |
| X8R | -55~+150 | ±15% |
| X8L | -55~+125 | ±15% |
| X8L | +125~+150 | +15/-40% |
| X8G | -55~+150 | 0±30ppm/°C |
| NP0 | -55~+125 | 0±30ppm/°C |

TYPICAL APPLICATIONS

X7R KAM

- High capacitance values
- Broadest voltage and cap offering
- Cameras
- Body control modules
- Infotainment
- ECU
- Climate control

X7T KAM

- Motor drive
- Door lock

NP0 KAM

- Extreme capacitance stability
- Automotive LED Lighting System
- Key fob
- Audio
- Touchscreen
- GPS
- Safety

X8G KAM

- Extreme capacitance stability
- High temperature
- Battery Management Systems
- Powertrain Sensors & Actuators
- Engine management
- Transmission control
- Safety

Automotive MLCC, KAM Series

General Specifications



COMMERCIAL VS AUTOMOTIVE MLCC PROCESS COMPARISON

| | Commercial | Automotive |
|--|--|---|
| Administrative | Standard Part Numbers. No restriction on who purchases these parts. | Specific Automotive Part Number. Used to control supply of product to Automotive customers. |
| Lot Qualification (Destructive Physical Analysis - DPA) | As per EIA RS469 | Increased sample plan stricter criteria. |
| Visual/Cosmetic Quality | Standard process and inspection | 100% inspection |
| Application Robustness | Standard sampling for accelerated wave solder | Increased sampling for accelerated wave solder followed by lot by lot reliability testing. |

All Tests have Accept/Reject Criteria 0/1

Automotive MLCC - NP0


General Specifications

TYPICAL APPLICATIONS

- Extreme capacitance stability
- Automotive LED Lighting System
- Key fob
- Audio
- Touchscreen
- GPS
- Safety

ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

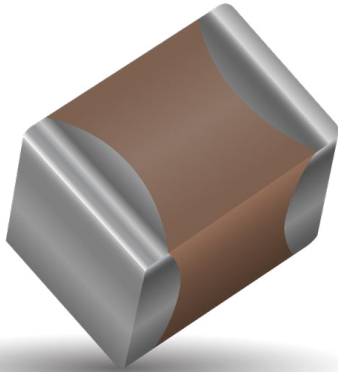

Automotive MLCC - NP0

Capacitance Range



| Case Size | | 0402 | | | 0603 | | | | 0805 | | | | | | 1206 | | | | | | 1210 | | | | | | | | | |
|--------------|----------|--------------------------------|-----|------|--------------------------------|-----|------|------|--------------------------------|-----|-----|------|------|------|--------------------------------|------|-----|------|------|------|--------------------------------|------|-------|-----|------|------|------|------|------|-------|
| Length (L) | mm (in.) | 1.00 ± 0.10 (0.040 ± 0.004) | | | 1.60 ± 0.15 (0.063 ± 0.006) | | | | 2.01 ± 0.20 0.079 ± 0.008 | | | | | | 3.20 ± 0.20 (0.126 ± 0.008) | | | | | | 3.20 ± 0.20 (0.126 ± 0.008) | | | | | | | | | |
| Width (W) | mm (in.) | 0.50 ± 0.10 (0.020 ± 0.004) | | | 0.81 ± 0.15 (0.032 ± 0.006) | | | | 1.25 ± 0.20 (0.049 ± 0.008) | | | | | | 1.60 ± 0.20 (0.063 ± 0.008) | | | | | | 2.50 ± 0.20 (0.098 ± 0.008) | | | | | | | | | |
| Terminal (t) | mm (in.) | 0.25 ± 0.15 (0.010 ± 0.006) | | | 0.35 ± 0.15 (0.014 ± 0.006) | | | | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | | | | |
| WVDC | | 25V | 50V | 100V | 25V | 50V | 100V | 200V | 250V | 25V | 50V | 100V | 200V | 250V | 500V | 630V | 50V | 100V | 200V | 250V | 500V | 630V | 1000V | 50V | 100V | 200V | 250V | 500V | 630V | 1000V |
| Cap (pF) DR5 | 0.5 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 1R0 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 100 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 120 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 150 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 180 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 220 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 270 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 330 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 390 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 470 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 560 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 680 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | Q | Q | Q | Q | Q | Q | Q |
| | 820 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | D | D | D |
| | 101 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | D | D | D |
| | 121 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | D | F | F |
| | 151 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 181 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 221 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 271 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 331 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 391 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 471 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | B | B | G | G | D | D | D | D | F | F | F |
| | 561 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | N | N | G | G | D | D | D | D | F | F | F |
| | 681 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | N | N | G | G | D | D | D | D | F | F | F |
| | 821 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | B | N | N | G | G | D | D | D | D | F | F | F |
| | 102 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | B | B | N | N | N | G | G | D | D | D | D | F | F | K |
| | 122 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | D | D | D | B | B | B | D | D | D | D | F | F | L | |
| | 152 | A | A | A | A | A | A | A | A | B | B | B | B | B | B | B | D | D | D | B | B | B | D | D | D | D | F | F | G | |
| | 222 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | B | B | B | B | B | B | B | D | D | D | D | F | G | G |
| | 272 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | B | B | B | B | B | B | B | D | D | D | D | F | G | G |
| | 332 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | G | G | G | G | G | G | G |
| | 392 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | G | G | G | G | G | G | G |
| | 472 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | G | G | G | G | G | G | G |
| | 562 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | G | G | G | G | G | G | G |
| | 682 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | K | K | K | K | K | K | K |
| | 822 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | K | K | K | K | K | K | K |
| | 103 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | K | K | K | K | K | K | L |
| | 123 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | K | K | K | K | K | K | L |
| | 153 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 183 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 223 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 273 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 333 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 393 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 473 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 563 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 683 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 823 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| | 104 | A | A | A | A | A | A | A | A | B | A | A | A | A | A | A | G | G | G | G | G | G | G | L | L | L | L | L | L | L |
| WVDC | | 25V | 50V | 100V | 25V | 50V | 100V | 200V | 250V | 25V | 50V | 100V | 200V | 250V | 500V | 630V | 50V | 100V | 200V | 250V | 500V | 630V | 1000V | 50V | 100V | 200V | 250V | 500V | 630V | 1000V |
| Case Size | | 0402 | | | 0603 | | | | 0805 | | | | | | 1206 | | | | | | 1210 | | | | | | | | | |

| Case Size | 0402 (KAM05) | 0603 (KAM15) | 0805 (KAM21) | | 1206 (KAM31) | | | | 1210 (KAM32) | | | | | | | |
|-------------------------|--------------|--------------|--------------|------|--------------|------|------|------|----------------|------|------|------|------|------|------|--|
| Thickness Letter | A | A | B | A | B | N | D | G | Q | B | D | F | G | K | L | |
| Max Thickness (mm) | 0.55 | 0.90 | 0.94 | 1.45 | 0.94 | 1.27 | 1.45 | 1.78 | 0.94 | 1.02 | 1.45 | 1.52 | 1.78 | 2.29 | 2.80 | |
| Carrier Tape | PAPER | PAPER | PAPER | EMB | PAPER | EMB | EMB | EMB | PAPER | EMB | EMB | EMB | EMB | EMB | EMB | |
| Packaging Code 7" reel | H | T | T | U | T | U | U | U | T | U | U | U | U | U | U | |
| Packaging Code 13" reel | N | M | M | L | M | L | L | L | M | L | L | L | L | L | L | |
| | PAPER | | | | | | | | EMBOSSED (EMB) | | | | | | | |

Automotive MLCC - X7R / X7T

General Specifications



TYPICAL APPLICATIONS

X7R KAM


- High capacitance values
- Broadest voltage and cap offering
- Cameras
- Body control modules
- Infotainment
- ECU
- Climate control

X7T KAM

- Motor drive
- Door lock

ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

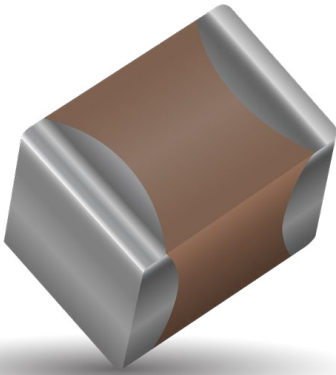

Automotive MLCC - X7R, 630V to 3000V

Capacitance Range



PREFERRED SIZES ARE SHADED

| Case Size | 1206 | | | | | 1210 | | | | 1808 | | | | | | 1812 | | | | | | 2220 | | | | | |
|--------------|------------------------------|------|------|------|------|------------------------------|------|------|------|--------------------------------|------|------|------|------|------|--------------------------------|------|------|------|------|------|--------------------------------|------|------|------|------|---|
| Soldering | Reflow/Wave | | | | | Reflow/Wave | | | | Reflow Only | | | | | | Reflow Only | | | | | | Reflow Only | | | | | |
| (L) Length | 3.2 ± 0.2 (0.126 ± 0.008) | | | | | 3.2 ± 0.2 (0.126 ± 0.008) | | | | 4.57 ± 0.25 (0.18 ± 0.01) | | | | | | 4.5 ± 0.3 (0.177 ± 0.012) | | | | | | 5.7 ± 0.5 (0.224 ± 0.02) | | | | | |
| (W) Width | 1.6 ± 0.2 (0.063 ± 0.008) | | | | | 2.5 ± 0.2 (0.098 ± 0.008) | | | | 2.03 ± 0.25 (0.08 ± 0.01) | | | | | | 3.2 ± 0.2 (0.126 ± 0.008) | | | | | | 5 ± 0.4 (0.197 ± 0.016) | | | | | |
| (t) Terminal | 0.5 ± 0.25 (0.02 ± 0.01) | | | | | 0.5 ± 0.25 (0.02 ± 0.01) | | | | 0.61 ± 0.36 (0.024 ± 0.014) | | | | | | 0.61 ± 0.36 (0.024 ± 0.014) | | | | | | 0.64 ± 0.39 (0.025 ± 0.015) | | | | | |
| Voltage (V) | 630 | 1000 | 1500 | 2000 | 2500 | 630 | 1000 | 1500 | 2000 | 630 | 1000 | 1500 | 2000 | 2500 | 3000 | 630 | 1000 | 1500 | 2000 | 2500 | 3000 | 630 | 1000 | 1500 | 2000 | 3000 | |
| 101 | Cap 100 | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 121 | (pF) 120 | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 151 | 150 | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 181 | 180 | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 221 | 220 | B | B | B | B | B | | | | B | B | B | B | B | B | | | | | | | | | | | | |
| 271 | 270 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | | | | | | | | | | | |
| 331 | 330 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | E | | | | | | | | | | |
| 391 | 390 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | E | | | | | | | | | | |
| 471 | 470 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | E | E | E | E | E | E | | | | | |
| 561 | 560 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | E | E | E | E | E | E | | | | | |
| 681 | 680 | B | B | B | B | B | H | H | H | H | B | B | B | B | B | B | E | E | E | E | E | E | | | | | |
| 821 | 820 | B | B | B | B | B | H | H | H | H | B | B | C | C | C | C | E | E | E | E | E | E | | | | | |
| 102 | 1000 | B | B | B | B | B | H | H | H | H | B | B | C | C | C | C | E | E | E | E | E | E | Z | Z | Z | Z | C |
| 122 | 1200 | D | A | A | A | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | C |
| 152 | 1500 | D | A | A | A | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | C |
| 182 | 1800 | D | A | A | | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | C |
| 222 | 2200 | D | A | A | | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | C |
| 272 | 2700 | D | A | A | | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | C |
| 332 | 3300 | D | A | | | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | |
| 392 | 3900 | D | A | | | | H | H | H | H | | | | | | | F | F | F | F | F | F | Z | Z | Z | Z | |
| 472 | 4700 | D | A | | | | H | H | H | H | | | | | | | F | F | J | J | J | J | Z | Z | Z | Z | |
| 562 | 5600 | D | A | | | | H | H | H | | | | | | | | F | F | J | J | J | J | Z | Z | Z | Z | |
| 682 | 6800 | A | A | | | | H | H | | | | | | | | | F | F | J | J | J | J | Z | Z | Z | Z | |
| 822 | 8200 | A | | | | | H | H | | | | | | | | | F | F | J | J | J | J | Z | Z | C | C | |
| 103 | Cap 0.01 | A | | | | | H | H | | | | | | | | | F | F | J | | | | C | C | C | C | |
| 123 | (µF) 0.012 | | | | | | H | H | | | | | | | | | F | F | J | | | | C | C | C | C | |
| 153 | 0.015 | | | | | | H | H | | | | | | | | | F | F | J | | | | C | C | C | C | |
| 183 | 0.018 | | | | | | H | | | | | | | | | | F | F | J | | | | C | C | C | C | |
| 223 | 0.022 | | | | | | H | | | | | | | | | | F | F | | | | | C | C | C | C | |
| 273 | 0.027 | | | | | | H | | | | | | | | | | F | F | | | | | C | C | C | C | |
| 333 | 0.033 | | | | | | | | | | | | | | | | F | | | | | | C | C | | | |
| 393 | 0.039 | | | | | | | | | | | | | | | | F | | | | | | C | C | | | |
| 473 | 0.047 | | | | | | | | | | | | | | | | F | | | | | | C | C | | | |
| 563 | 0.056 | | | | | | | | | | | | | | | | | | | | | | C | C | | | |
| 683 | 0.068 | | | | | | | | | | | | | | | | | | | | | | C | C | | | |
| 823 | 0.082 | | | | | | | | | | | | | | | | | | | | | | C | C | | | |
| 104 | 0.1 | | | | | | | | | | | | | | | | | | | | | | C | C | | | |
| 124 | 0.12 | | | | | | | | | | | | | | | | | | | | | | C | | | | |
| 154 | 0.15 | | | | | | | | | | | | | | | | | | | | | | C | | | | |
| 224 | 0.22 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 334 | 0.33 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 474 | 0.47 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 684 | 0.68 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 105 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WVDC | 630 | 1000 | 1500 | 2000 | 2500 | 630 | 1000 | 1500 | 2000 | 630 | 1000 | 1500 | 2000 | 2500 | 3000 | 630 | 1000 | 1500 | 2000 | 2500 | 3000 | 630 | 1000 | 1500 | 2000 | 3000 | |
| Size | 1206 | | | | | 1210 | | | | 1808 | | | | | | 1812 | | | | | | 2220 | | | | | |

NOTE: Contact factory for non-specified capacitance values

| Case Size | 1206(KAM31) | | | 1210(KAM32) | | 1808(KAM42) | | 1812(KAM43) | | | 2220(KAM55) | |
|-------------------------|-------------|------|------|-------------|--|----------------|------|-------------|------|------|-------------|------|
| Thickness Letter | B | D | A | H | | B | C | E | F | J | Z | C |
| Max Thickness | 0.94 | 1.45 | 1.80 | 1.80 | | 1.80 | 2.21 | 1.80 | 2.21 | 2.80 | 2.21 | 2.80 |
| Carrier Tape | PAPER | EMB | EMB | EMB | | EMB | EMB | EMB | EMB | EMB | EMB | EMB |
| Packaging Code 7' reel | T | U | U | U | | Y | Y | V | V | V | V | V |
| Packaging Code 13' reel | M | L | L | L | | K | K | S | S | S | S | S |
| | Paper | | | | | EMBOSSED (EMB) | | | | | | |

Automotive MLCC - X8R / X8L


General Specifications

TYPICAL APPLICATIONS

- All market sectors with a 150°C requirement
- Automotive on engine applications
- Oil exploration applications
- Hybrid automotive applications
 - Battery control
 - Inverter / converter circuits
 - Motor control applications
 - Water pump
- Hybrid commercial applications
 - Emergency circuits
 - Sensors
 - Temperature regulation

ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support




ADVANTAGES OF X8R AND X8L MLC CAPACITORS

- Both ranges are qualified to the highest automotive AEC-Q200 standards
- Excellent reliability compared to other capacitor technologies
- RoHS compliant
- Low ESR / ESL compared to other technologies
- Tin solder finish
- FLEXITERM® available
- 100V range available

X8R/X8L Dielectric

0805, 50V, X8R/X8L Typical Temperature Coefficient

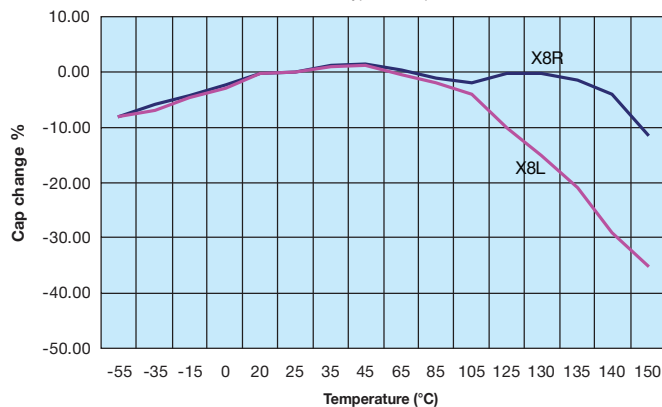

Automotive MLCC - X8R / X8L

Capacitance Range

KYOCERA AVX has developed a range of multilayer ceramic capacitors designed for use in applications up to 150°C. These capacitors are manufactured with an X8R and an X8L dielectric material. X8R material has capacitance variation of ± 15% between -55°C and +150°C. The X8L material has capacitance variation of ±15% between -55°C to 125°C to 125°C and +15/40% from +125°C to +150°C.

The need for X8R and X8L performance has been driven by customer requirements for parts that operate at elevated temperatures. They provide a highly reliable capacitor with low loss and stable capacitance over temperature.

They are ideal for automotive under the hood sensors, and various industrial applications. Typical industrial application would be drilling monitoring system. They can also be used as bulk capacitors for high temperature camera modules.

X8R

| SIZE | | 0402 | | 0603 | | 0805 | | 1206 | |
|--------------|------------|-------------------------------|---|--------------------------------|-----|-------------------------------|-----|------------------------------|------|
| Soldering | | Reflow/Wave | | Reflow/Wave | | Reflow/Wave | | Reflow/Wave | |
| (L) Length | mm | 1.0 ± 0.2 (0.04 ± 0.008) | | 1.6 ± 0.15 (0.063 ± 0.006) | | 2.01 ± 0.2 (0.079 ± 0.008) | | 3.2 ± 0.2 (0.126 ± 0.008) | |
| | (in.) | 0.5 ± 0.2 (0.02 ± 0.008) | | 0.81 ± 0.15 (0.032 ± 0.006) | | 1.25 ± 0.2 (0.049 ± 0.008) | | 1.6 ± 0.2 (0.063 ± 0.008) | |
| (W) Width | mm | 0.25 ± 0.15 (0.01 ± 0.006) | | 0.35 ± 0.15 (0.014 ± 0.006) | | 0.5 ± 0.25 (0.02 ± 0.01) | | 0.5 ± 0.25 (0.02 ± 0.01) | |
| | (in.) | | | | | | | | |
| (t) Terminal | mm | | | | | | | | |
| | (in.) | | | | | | | | |
| WVDC | | 50V | | 25V | 50V | 100V | 25V | 50V | 100V |
| 271 | Cap 270 | A | A | A | A | | | | |
| 331 | (pF) 330 | A | A | A | A | B | B | B | |
| 471 | 470 | A | A | A | A | B | B | B | |
| 681 | 680 | A | A | A | A | B | B | B | |
| 102 | 1000 | A | A | A | A | B | B | B | B |
| 152 | 1500 | A | A | A | A | B | B | B | B |
| 182 | 1800 | A | A | A | A | B | B | B | B |
| 222 | 2200 | A | A | A | A | B | B | B | B |
| 272 | 2700 | A | A | A | A | B | B | B | B |
| 332 | 3300 | A | A | A | A | B | B | B | B |
| 392 | 3900 | A | A | A | A | B | B | B | B |
| 472 | 4700 | A | A | A | A | B | B | B | B |
| 562 | 5600 | | A | A | A | B | B | B | B |
| 682 | 6800 | | A | A | A | B | B | B | B |
| 822 | 8200 | | A | A | A | B | B | B | B |
| 103 | Cap 0.01 | | A | A | A | B | B | B | B |
| 123 | (uF) 0.012 | | A | A | | B | B | B | B |
| 153 | 0.015 | | A | A | | B | B | A | B |
| 183 | 0.018 | | A | A | | B | B | A | B |
| 223 | 0.022 | | A | A | | B | B | A | B |
| 273 | 0.027 | | A | A | | B | B | | B |
| 333 | 0.033 | | A | A | | B | B | | B |
| 393 | 0.039 | | A | A | | B | B | | B |
| 473 | 0.047 | | A | A | | B | B | | B |
| 563 | 0.056 | | A | | | A | A | | N |
| 683 | 0.068 | | A | | | A | A | | N |
| 823 | 0.082 | | | | | A | A | | N |
| 104 | 0.1 | | | | | A | A | | N |
| 124 | 0.12 | | | | | A | A | | N |
| 154 | 0.15 | | | | | A | A | | N |
| 184 | 0.18 | | | | | A | | | N |
| 224 | 0.22 | | | | | A | | | N |
| 274 | 0.27 | | | | | | | | N |
| 334 | 0.33 | | | | | | | | N |
| 394 | 0.39 | | | | | | | | E |
| 474 | 0.47 | | | | | | | | E |
| 684 | 0.68 | | | | | | | | G |
| 824 | 0.82 | | | | | | | | G |
| 105 | 1 | | | | | | | | G |
| WVDC | | 50V | | 25V | 50V | 100V | 25V | 50V | 100V |
| SIZE | | 0402 | | 0603 | | 0805 | | 1206 | |

| Case Size | 0402(KAM05) | | 0603(KAM15) | | 0805(KAM21) | | 1206(KAM31) | | | 1210(KAM32) |
|-------------------------|-------------|-------|-------------|-------|-------------|----------------|-------------|------|------|-------------|
| Thickness Letter | A | A | B | B | A | B | N | E | G | L |
| Max Thickness | 0.56 | 0.90 | 0.95 | 0.94 | 1.45 | 0.94 | 1.27 | 1.52 | 1.78 | 2.79 |
| Carrier Tape | PAPER | PAPER | PAPER | PAPER | EMB | PAPER | EMB | EMB | EMB | EMB |
| Packaging Code 7" reel | H | T | T | T | U | T | U | U | U | U |
| Packaging Code 13" reel | N | M | M | M | L | M | L | L | L | L |
| | Paper | | | | | EMBOSSED (EMB) | | | | |

X8L

| SIZE | | 0603 | | | 0805 | | | 1206 | | | | 1210 | | | |
|--------------|------------|--------------------------------|-----|------|-------------------------------|-----|------|------------------------------|-----|-----|------|------------------------------|-----|-----|------|
| Soldering | | Reflow/Wave | | | Reflow/Wave | | | Reflow/Wave | | | | Reflow/Wave | | | |
| (L) Length | mm | 1.6 ± 0.15 (0.063 ± 0.006) | | | 2.01 ± 0.2 (0.079 ± 0.008) | | | 3.2 ± 0.2 (0.126 ± 0.008) | | | | 3.2 ± 0.2 (0.126 ± 0.008) | | | |
| | (in.) | 0.81 ± 0.15 (0.032 ± 0.006) | | | 1.25 ± 0.2 (0.049 ± 0.008) | | | 1.6 ± 0.2 (0.063 ± 0.008) | | | | 2.5 ± 0.2 (0.098 ± 0.008) | | | |
| (W) Width | mm | 0.35 ± 0.15 (0.014 ± 0.006) | | | 0.5 ± 0.25 (0.02 ± 0.01) | | | 0.5 ± 0.25 (0.02 ± 0.01) | | | | 0.5 ± 0.25 (0.02 ± 0.01) | | | |
| | (in.) | | | | | | | | | | | | | | |
| (t) Terminal | mm | | | | | | | | | | | | | | |
| | (in.) | | | | | | | | | | | | | | |
| WVDC | | 25V | 50V | 100V | 25V | 50V | 100V | 16V | 25V | 50V | 100V | 10V | 25V | 50V | 100V |
| 271 | Cap 270 | A | A | | | | | | | | | | | | |
| 331 | (pF) 330 | A | A | A | B | B | B | | | | | | | | |
| 471 | 470 | A | A | A | B | B | B | | | | | | | | |
| 681 | 680 | A | A | A | B | B | B | | | | | | | | |
| 102 | 1000 | A | A | A | B | B | B | | | B | B | | | | |
| 152 | 1500 | A | A | A | B | B | B | | | B | B | B | | | |
| 182 | 1800 | A | A | A | B | B | B | | | B | B | B | | | |
| 222 | 2200 | A | A | A | B | B | B | | | B | B | B | | | |
| 272 | 2700 | A | A | A | B | B | B | | | B | B | B | | | |
| 332 | 3300 | A | A | A | B | B | B | | | B | B | B | | | |
| 392 | 3900 | A | A | A | B | B | B | | | B | B | B | | | |
| 472 | 4700 | A | A | A | B | B | B | | | B | B | B | | | |
| 562 | 5600 | | A | A | A | B | B | B | | B | B | B | | | |
| 682 | 6800 | | A | A | A | B | B | B | | B | B | B | | | |
| 822 | 8200 | | A | A | A | B | B | B | | B | B | B | | | |
| 103 | Cap 0.01 | | A | A | A | B | B | B | | B | B | B | | | |
| 123 | (uF) 0.012 | | A | A | A | B | B | B | | B | B | B | | | |
| 153 | 0.015 | | A | A | A | B | B | B | | B | B | B | | | |
| 183 | 0.018 | | A | A | A | B | B | B | | B | B | B | | | |
| 223 | 0.022 | | A | A | A | B | B | B | | B | B | B | | | |
| 273 | 0.027 | | A | A | A | B | B | B | | B | B | B | | | |
| 333 | 0.033 | | A | A | B | B | B | A | | B | B | B | | | |
| 393 | 0.039 | | A | A | | B | B | A | | B | B | B | | | |
| 473 | 0.047 | | A | A | | B | B | A | | B | B | B | | | |
| 563 | 0.056 | | A | A | | B | B | A | | B | B | B | | | |
| 683 | 0.068 | | A | A | | B | B | A | | B | B | B | | | |
| 823 | 0.082 | | A | A | | B | B | A | | B | B | N | | | |
| 104 | 0.1 | | A | A | | B | B | A | | B | B | N | | | |
| 124 | 0.12 | | | | | B | A | | | B | B | N | | | |
| 154 | 0.15 | | | | | B | A | | | B | B | N | | | |
| 184 | 0.18 | | | | | | A | A | | B | B | B | G | | |
| 224 | 0.22 | | | | | | A | A | | B | B | B | G | | |
| 274 | 0.27 | | | | | | A | A | | B | N | N | G | | |
| 334 | 0.33 | | | | | | A | A | | B | N | N | E | | |
| 394 | 0.39 | | | | | | A | A | | N | N | E | | | |
| 474 | 0.47 | | | | | | A | A | | N | N | E | | | |
| 684 | 0.68 | | | | | | A | A | | N | G | G | | | |
| 824 | 0.82 | | | | | | A | A | | N | G | G | | | |
| 105 | 1 | | | | | | A | A | | N | G | G | | | |
| 155 | 1.5 | | | | | | A | | | G | G | G | | | |
| 225 | 2.2 | | | | | | A | | | G | G | G | | | L |
| 475 | 4.7 | | | | | | | | | G | G | | | | L |
| 106 | 10 | | | | | | | | | | | | | | L |
| WVDC | | 25V | 50V | 100V | 25V | 50V | 100V | 16V | 25V | 50V | 100V | 10V | 25V | 50V | 100V |
| SIZE | | 0603 | | | 0805 | | | 1206 | | | | 1210 | | | |

Automotive MLCC - X8G



General Specifications

TYPICAL APPLICATIONS

- Extreme capacitance stability
- High temperature
- Battery Management Systems
- Powertrain Sensors & Actuators
- Engine management
- Transmission control
- Safety

ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

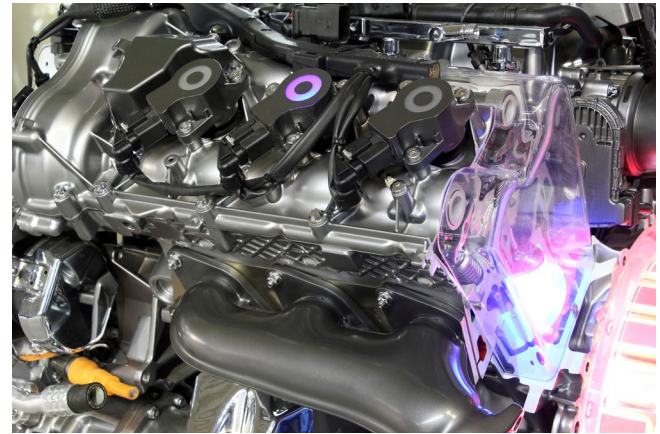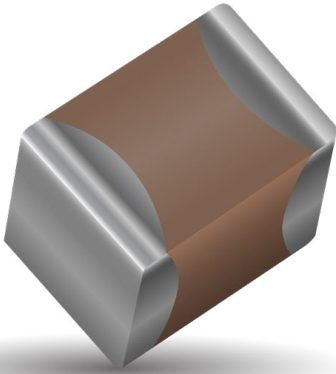

Automotive X8G (-55°C to 150°C , ±30ppm/°C)

Capacitance Range

| SIZE | | 0402 | | 0603 | | 0805 | |
|--------------|-------------|-------------------------------|-----|--------------------------------|-----|-------------------------------|------|
| Soldering | | Reflow/Wave | | Reflow/Wave | | Reflow/Wave | |
| (L) Length | mm (in.) | 1 ± 0.1 (0.04 ± 0.004) | | 1.6 ± 0.15 (0.063 ± 0.006) | | 2.01 ± 0.2 (0.079 ± 0.008) | |
| (W) Width | mm (in.) | 0.5 ± 0.1 (0.02 ± 0.004) | | 0.81 ± 0.15 (0.032 ± 0.006) | | 1.25 ± 0.2 (0.049 ± 0.008) | |
| (t) Terminal | mm (in.) | 0.25 ± 0.15 (0.01 ± 0.006) | | 0.35 ± 0.15 (0.014 ± 0.006) | | 0.5 ± 0.25 (0.02 ± 0.01) | |
| WVDC | | 25V | 50V | 25V | 50V | 50V | 100V |
| 0R5 | 0.5 | | | A | A | B | B |
| 1R0 | 1.0 | | | A | A | B | B |
| 1R2 | 1.2 | | | A | A | B | B |
| 1R5 | 1.5 | | | A | A | B | B |
| 1R8 | 1.8 | | | A | A | B | B |
| 2R2 | 2.2 | | | A | A | B | B |
| 2R7 | 2.7 | | | A | A | B | B |
| 3R3 | 3.3 | | | A | A | B | B |
| 3R9 | 3.9 | | | A | A | B | B |
| 4R7 | 4.7 | | | A | A | B | B |
| 5R0 | 5 | | | A | A | B | B |
| 5R6 | 5.6 | | | A | A | B | B |
| 6R8 | 6.8 | | | A | A | B | B |
| 8R2 | 8.2 | | | A | A | B | B |
| 100 | 10 | | | A | A | B | B |
| 120 | 12 | | | A | A | B | B |
| 150 | 15 | | | A | A | B | B |
| 180 | 18 | | | A | A | B | B |
| 220 | 22 | | | A | A | B | B |
| 270 | 27 | | | A | A | B | B |
| 330 | 33 | | | A | A | B | B |
| 390 | 39 | | | A | A | B | B |
| 470 | 47 | A | A | A | A | B | B |
| 510 | 51 | A | A | A | A | B | B |
| 560 | 56 | A | A | A | A | B | B |
| 680 | 68 | A | A | A | A | B | B |
| 820 | 82 | A | A | A | A | B | B |
| 101 | 100 | A | A | A | A | B | B |
| 121 | 120 | | | A | A | B | B |
| 151 | 150 | | | A | A | B | B |
| 181 | 180 | | | A | A | B | B |
| 221 | 220 | | | A | A | B | B |
| 271 | 270 | | | A | A | | |
| 331 | 330 | | | A | A | | |
| 391 | 390 | | | A | A | | |
| 471 | 470 | | | A | A | | |
| 561 | 560 | | | A | A | | |
| 681 | 680 | | | A | A | | |
| 821 | 820 | | | | | | |
| 102 | 1000 | | | | | | |
| 122 | 1200 | | | | | | |
| 152 | 1500 | | | | | | |
| 182 | 1800 | | | | | | |
| 222 | 2200 | | | | | | |
| 272 | 2700 | | | | | | |
| 332 | 3300 | | | | | | |
| 392 | 3900 | | | | | | |
| 472 | 4700 | | | | | | |
| 562 | 5600 | | | | | | |
| 682 | 6800 | | | | | | |
| 103 | 10nF | | | | | | |
| WVDC | | 25V | 50V | 25V | 50V | 50V | 100V |
| Size | | 0402 | | 0603 | | 0805 | |

| Case Size | 0402(KAM05) | 0603(KAM15) | 0805(KAM21) |
|------------------------|-------------|-------------|-------------|
| Letter | A | A | B |
| Max Thickness mm | 0.56 | 0.90 | 0.94 |
| Carrier Tape | Paper | Paper | Paper |
| Packaging Code 7"reel | H | T | T |
| Packaging Code 13"reel | N | M | M |
| | Paper | | |