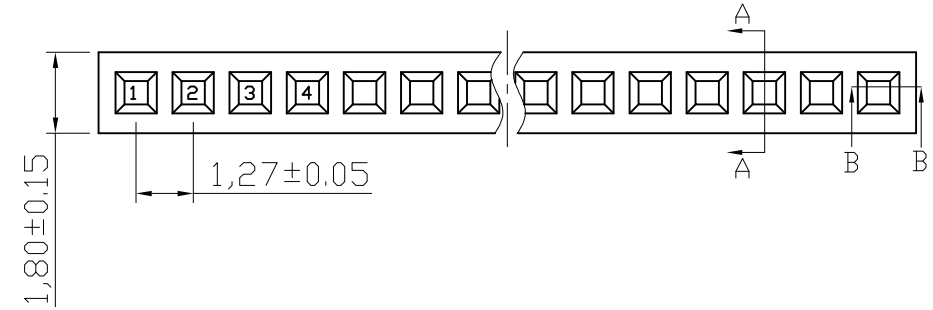

Recommended PCB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

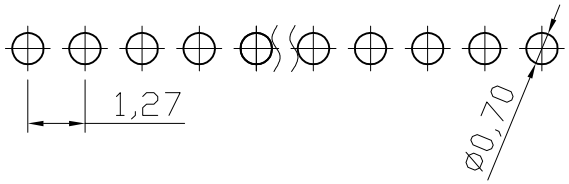

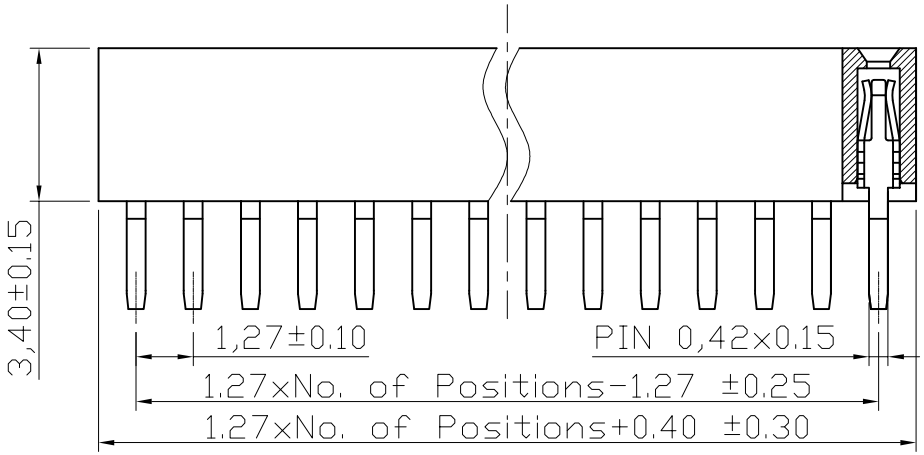

SECTION B-B

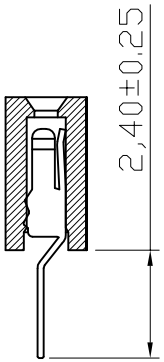

SECTION A-A

NOTES:

MATERIAL
1.Insulator Material:PA6T+30%GF(UL94V-0)
2.Contact Material : Phosphor Bronze
3.Contact Plating :Gold Flash

ELECTRICAL
1.Current Rating : 1.0AMP
2.Withstand Voltage : 500V AC/DC
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing: Tube

RoHS compliant

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	27.07.2009	Dean	
X.X	±0.30				Approved	09.2012	Winnie	ASSMANN WSW-No. A-BL127-EG-GxxD
X.XX	±0.20							
X.XXX	±0.10							Drawing-No. ASS 0255 CO rev02
DIM	TOL	2	Change of production plant	09.2012	Winnie			
Angle	±5°	1	Drawn	27.07.2009	Dean			
		Id.	Modification	Date	Name			Replace SHEET

ASSMANN WSW components

SVXXX