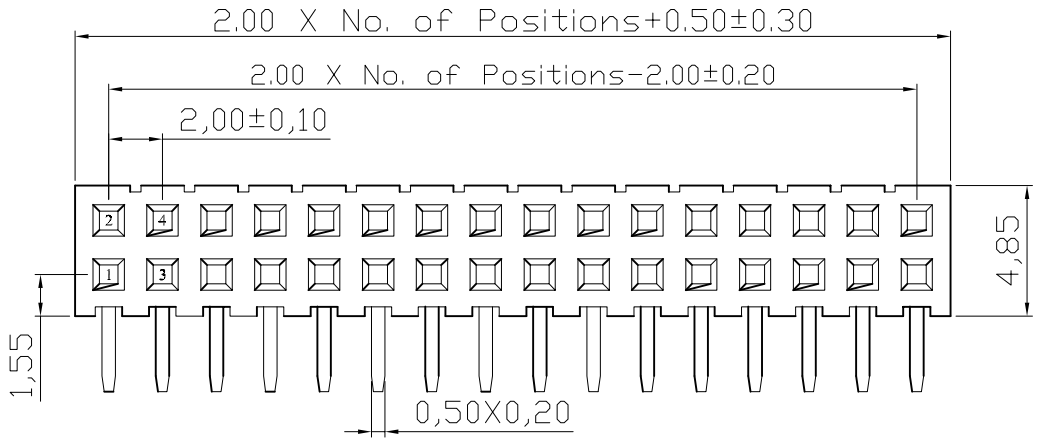

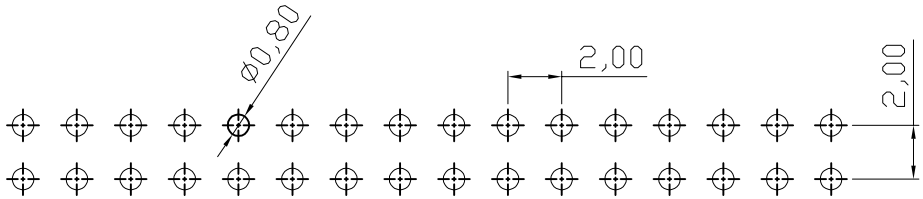

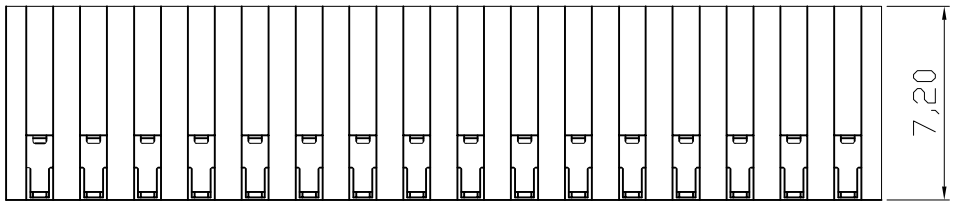

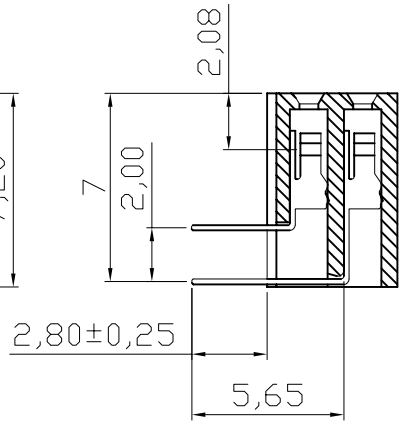

NOTES:

MATERIAL
1.Insulator Material:PA6T+30%GF(UL94V-0)
2.Contact Material : Brass
④3.Plating:
A-BL200-DA-GxxD: Gold flash
A-BL200-DA-ZxxD: Tinned

ELECTRICAL
1.Current Rating : 1.5AMP
2.Withstand Voltage : 450V AC/DC
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Soldering temperature: +260°C,10s max
3.Packing: Tube

RoHS compliant

Unit: mm

Scale	Free
TOLERANCE	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
DIM	TOL
Angle	±5°

Id.	Modification	Date	Name
④	Change of production plant	09.2012	Winnie
③	change design	16.12.2011	Lucas
②	Update	27.07.2009	Dean
①	Drawn	28.09.2006	Hellwig

	Date	Name
Drawn	28.09.2006	Hellwig
Approved	09.2012	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
④A-BL200-DA-xxxD

Drawing-No.
ASS 1399 CO

rev04

Replace

SHEET

SVXXX