



**Electrical specifications**

**Center Frequency:** 5530 MHz  
**Bandwidth:** 20 MHz  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 5520-5540 MHz  
**Passband Insertion Loss:** 1.75 dB max  
**IL Variation:** 0.75 dB  
**Passband Ripple:** <0.2 dB  
**Passband Return Loss:** >14 dB  
**Rejection:** DC-(CF-20)MHz 20 dBc min  
**Rejection 2:** (CF+20) MHz -6200 MHz 20 dBc  
**Power Handling:** 1 W  
**Group Delay Variation:** 4 ns over any 0.5 MHz


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N-Type Female and Male  
**Dimensions:** 3.28 x 3.28 x 1.26 in

**Environmental**

**Operating Temperature:** -30 to +60 deg.C  
**Storage Temperature:** -55 to +95 deg.C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 Hz

**Outline Drawing:**

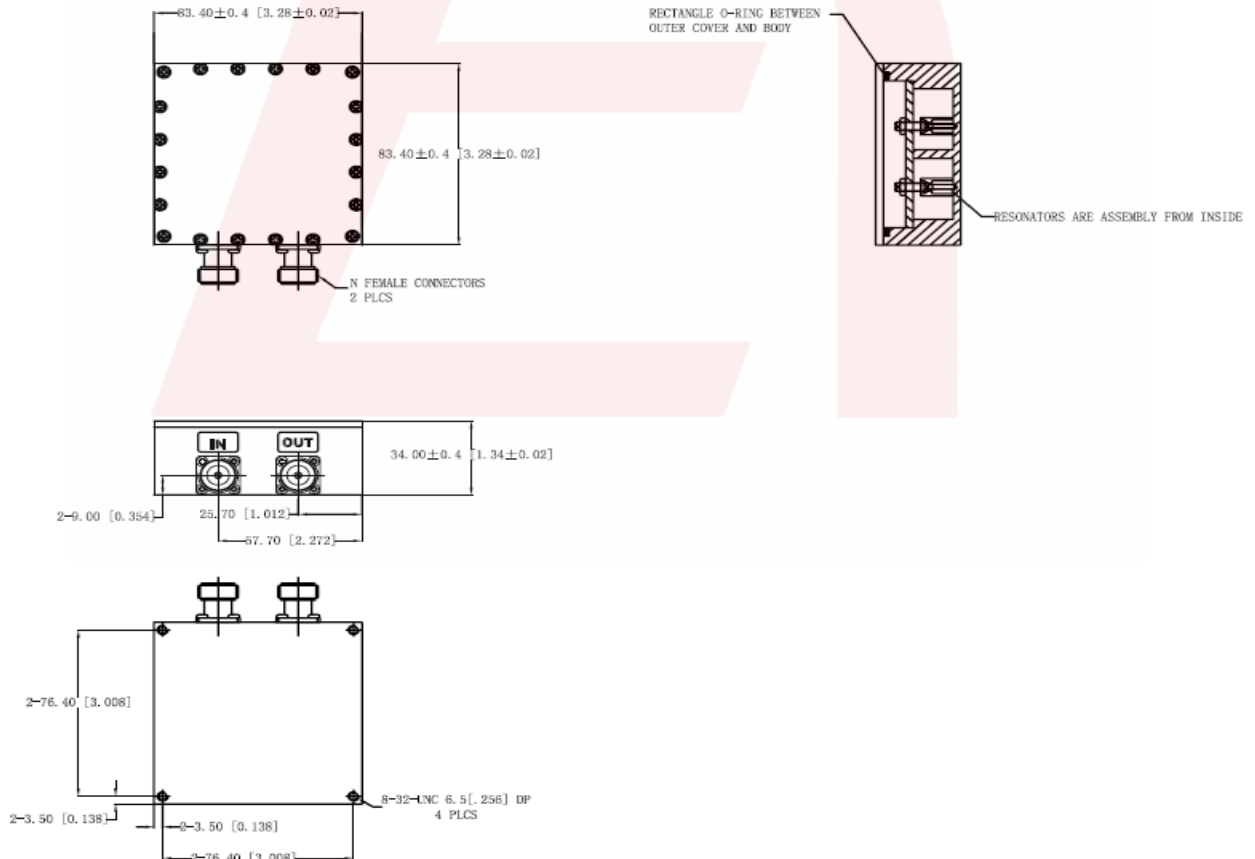

DS-B564-03152018-Rev0



### Response Plot:

