




5000 MHz Ceramic Bandpass Filter

P/N: AM5000B1141

Center Frequency (Fo)	5000 MHz
Bandwidth(BW)	400MHz
Insertion Loss (Fo)	3.5 dB max
Ripple in BW	1.3 dB max
VSWR in BW	1.7 : 1 min
Attenuation	18dB min at 4700MHz 18dB min at 5300MHz 50dB min at 5700MHz 50dB min at DC~4400MHz
In/Out Impedance	50 Ω
Operating Temp Range	-20 ~ 60°C
This product is RoHs compliant.	

DIMENSIONS

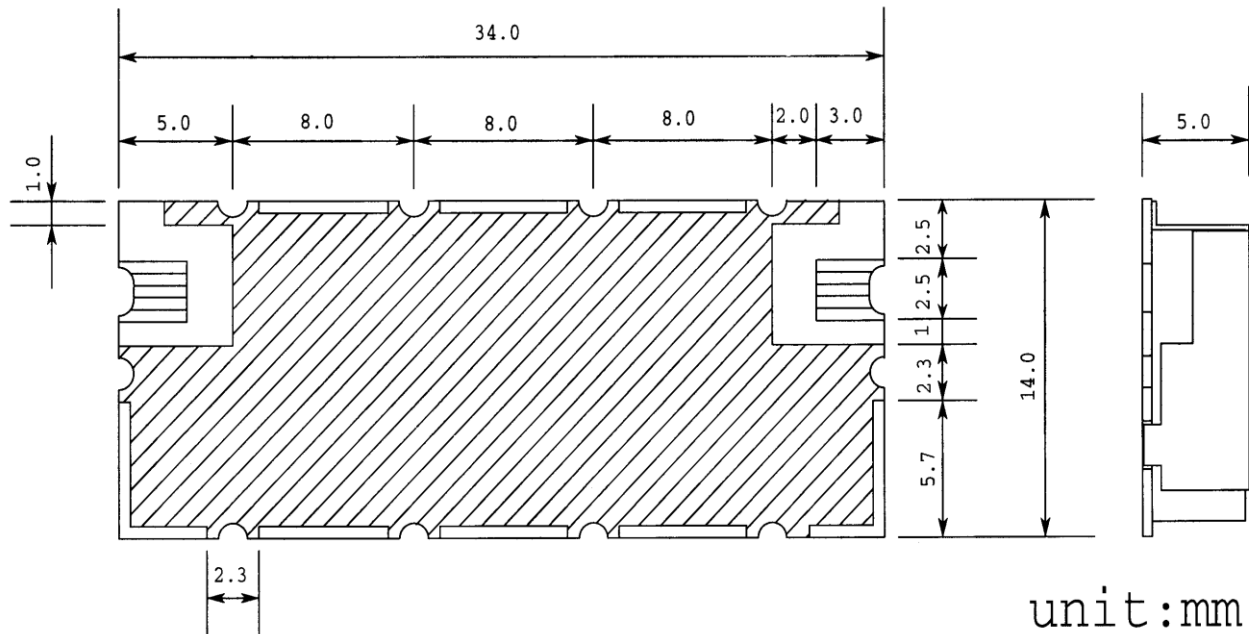



5000 MHz Ceramic Bandpass Filter

P/N: AM5000B1141

