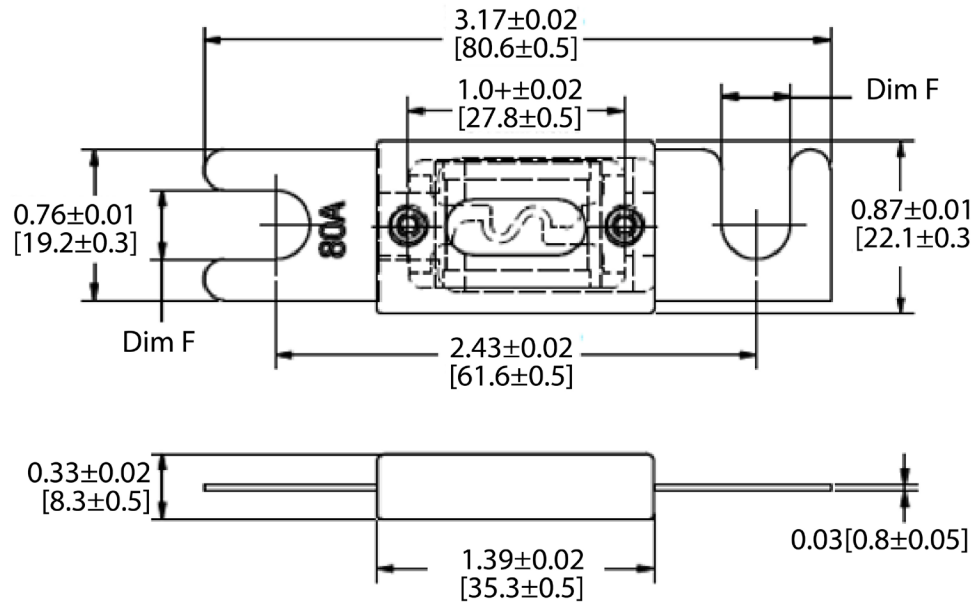


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

Part Numbers Information

Part Number	Amperage	Dim "F" (mm)
ANF-40A	40A	8.8 ± 0.2
ANF-50A	50A	8.8 ± 0.2
ANF-60A	60A	8.8 ± 0.2
ANF-80A	80A	8.8 ± 0.2
ANF-100A	100A	8.8 ± 0.2
ANF-125A	125A	8.8 ± 0.2
ANF-130A	130A	8.8 ± 0.2
ANF-150A	150A	8.8 ± 0.2
ANF-175A	175A	8.8 ± 0.2
ANF-180A	180A	8.8 ± 0.2
ANF-200A	200A	8.8 ± 0.2
ANF-225A	225A	8.8 ± 0.2
ANF-250A	250A	8.8 ± 0.2
ANF-275A	275A	8.8 ± 0.2
ANF-300A	300A	8.8 ± 0.2
ANF-400A	400A	8.8 ± 0.2
ANF-425A	425A	8.8 ± 0.2
ANF-500A	500A	8.8 ± 0.2
ANF-600A	600A	11.11 ± 0.3
ANF-700A	700A	11.11 ± 0.3
ANF-800A	800A	11.11 ± 0.3

Electrical Specifications

Voltage Rating	32VDC; 125VAC
Interrupting Rating	2000A @ 32VDC (40A~400A) 1500A @ 32VDC (500A~600A) 2500A @ 32VDC (700A~800A)

--

Material Specifications

Body Material	Bakelite
Terminal Material	Brass, Gold Plated (40A~80A) Copper Alloy, Gold Plated

--

Electrical Characteristics

Opening Time		
% of Rated Current	Min	Max
100%	4 hr.	-
250%	-	300s

*Graphical data is for reference only. Product should be tested in all applications before use.

Rev	Date of issue	Revision Notes	Designed	Approved
H	07-01-2024	Updated to New Style	RC	OF