

SPECIFICATIONS





| PARAMETERS | VALUES | UNIT |
|-------------------------|-----------------|-------|
| RATED VOLTAGE | 1.5 | Vpk |
| OPERATING VOLTAGE RANGE | 1 ~ 2 | Vpk |
| RATED CURRENT (MAX) | 90 | mA |
| COIL RESISTANCE | 6 ± 1 | OHM |
| MINIMUM SPL @ 10 CM | 85 | dBA |
| RESONANT FREQUENCY | 2,730 ± 500 | Hz |
| OPERATING TEMPERATURE | -20 ~ +70 | °C |
| STORAGE TEMPERATURE | -30 ~ +80 | °C |
| HOUSING MATERIAL | PBT | - |
| TERMINAL MATERIAL | Au PLATED BRASS | - |
| WEIGHT | 1 | grams |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PUI AUDIO, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PUI AUDIO, INC. IS PROHIBITED.

©2010, PUI AUDIO Inc.

REVISION HISTORY

| LTR | DESCRIPTION | DATE | APPROVED |
|-----|---------------------------|-----------|----------|
| - | RELEASED FROM ENGINEERING | 7/15/2014 | |
| A | REVISED HOUSING MATERIAL | 2/14/2020 | M.L. |

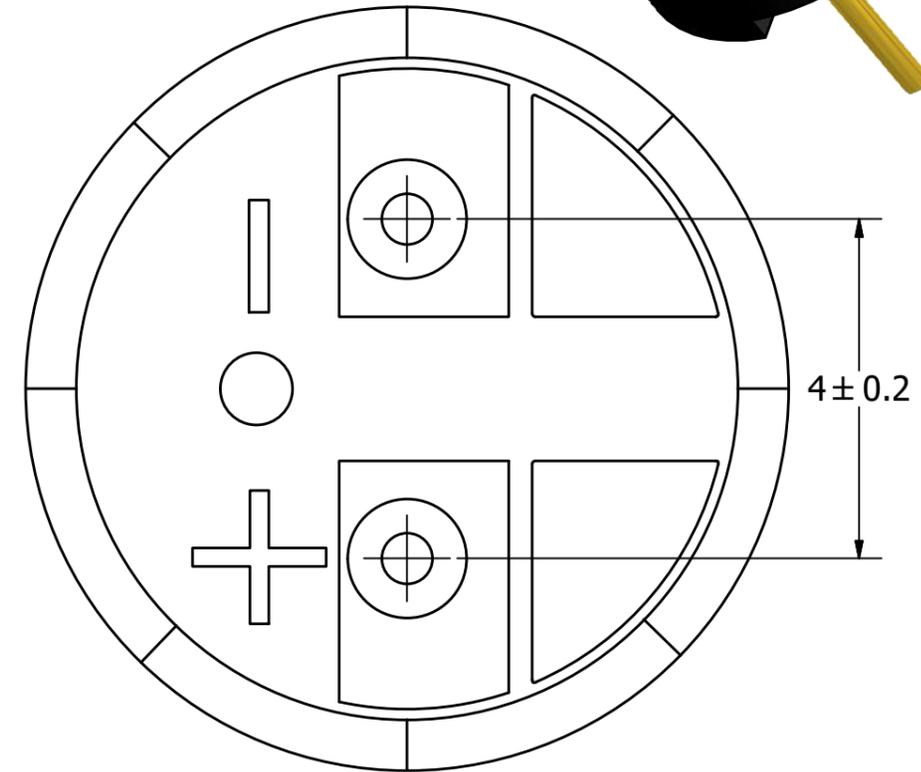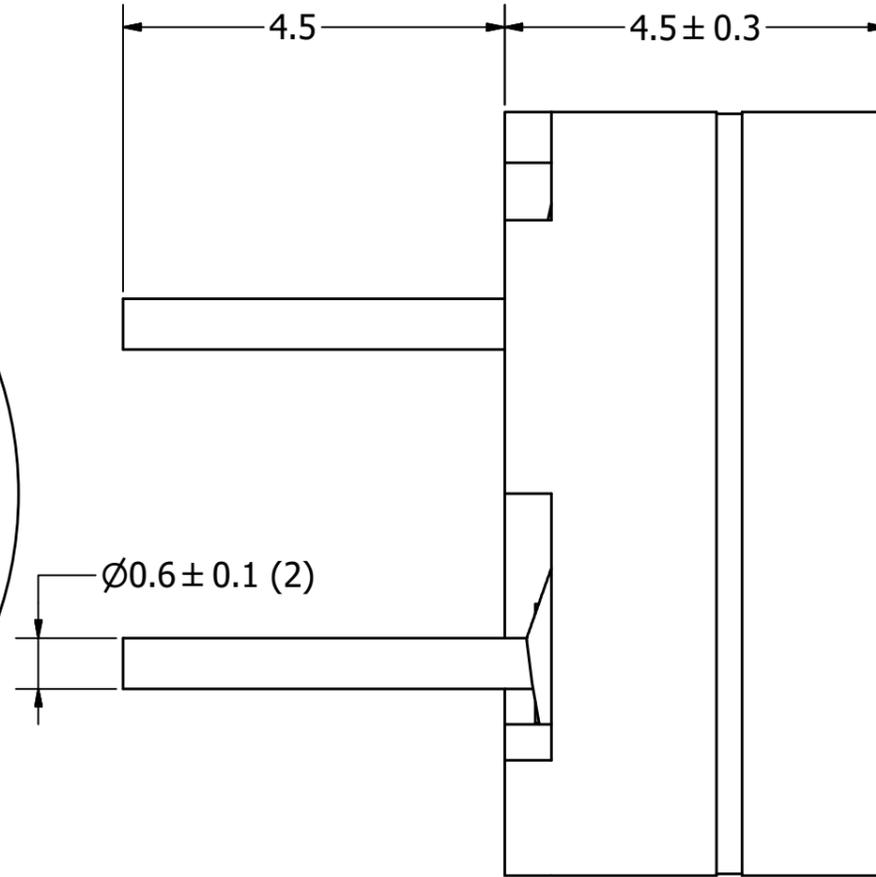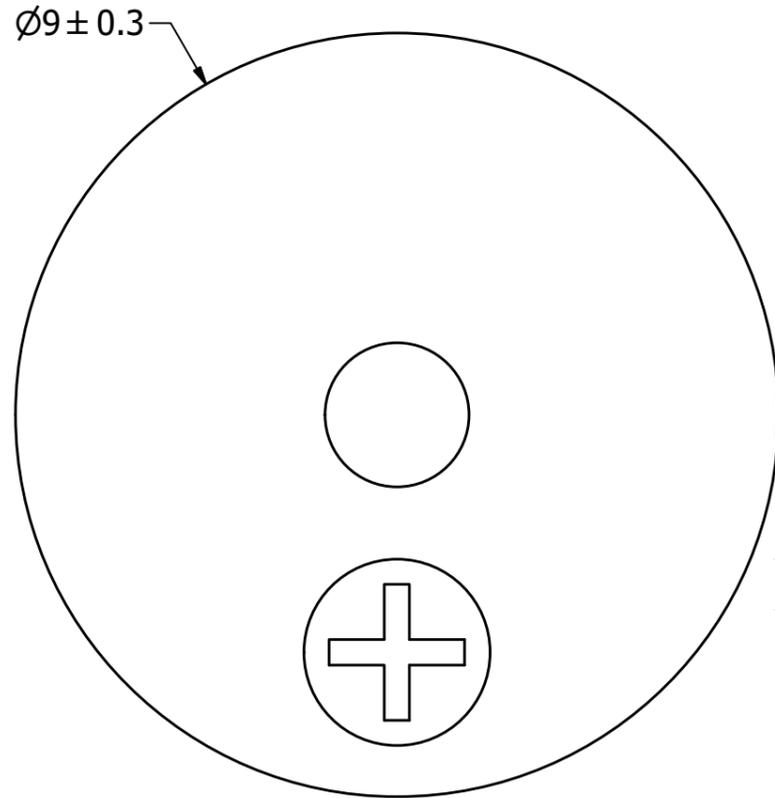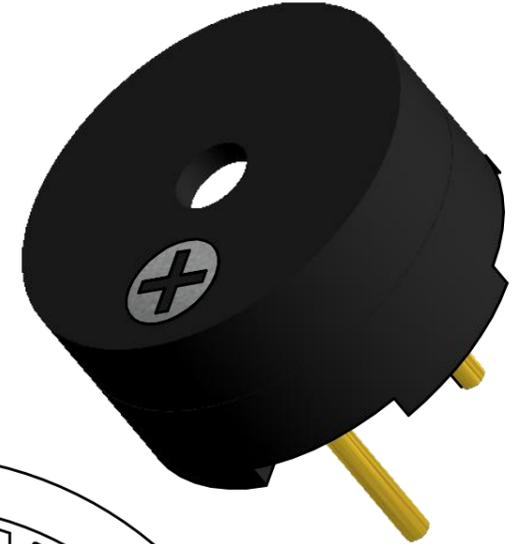

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2015/863/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED:
 ALL PURCHASES ARE SUBJECT TO AND INCORPORATE THE PUI AUDIO TERMS AND CONDITIONS SALE FOUND AT http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request).
 DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AT-0927-TT-5-R.idw

SIZE
A3

| Designed by | Date | Checked by | Date | Approved by | Date | Drawn Date |
|-------------|-----------|------------|-----------|-------------|-----------|------------|
| J.D. | 7/15/2014 | C.W. | 7/15/2014 | B.R. | 7/15/2014 | 7/15/2014 |



AT-0927-TT-5-R

| | | |
|---------------------------|---------|-------|
| Transducer (Electro-Mech) | Edition | Sheet |
| | - | 1 / 1 |