

Power Inductor AWVC Series

Automotive
AEC-Q200

RoHS Compliant
Halogen Free
REACH Compliant



Power
Circuit

Shield

Magnetic
Resin LVx

Ferrite

High
Current

Part Numbering


A	WVC	00	252012	1R0	M	00
Grade	Series Name	Control Code	Dimensions Code (mm)	Inductance (uH)	Tolerance	Internal Code
			201610 2.0x1.6x1.0	R47 0.47	M ±20%	
			201612 2.0x1.6x1.2	1R0 1.0	T ±30%	
			252012 2.5x2.0x1.2	101 100		
			404018 4.0x4.0x1.9			
			505040 5.0x5.0x4.0			
			606028 6.0x6.0x2.8			
			606045 6.0x6.0x4.5			

Power Inductor AWVC Series


Automotive
AEC-Q200

AWVC00201610 Type

■ Dimensions

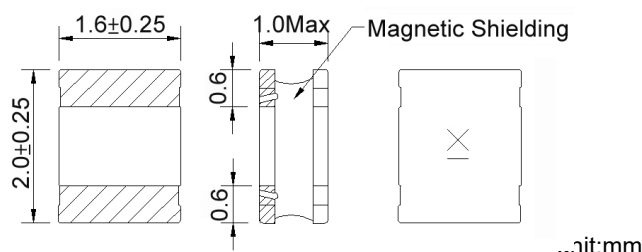

■ Recommended Land Pattern



■ Electrical Characteristics

Part No.	Inductance (μ H)	Test Freq.	RDC (Ω) $\pm 30\%$	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance ($\pm\%$)	Marking
AWVC00201610R24 $\square$ 00	0.24	1MHz,200mV	0.026	3.20(2.80)	3.00(2.70)	20,30	M
AWVC002016101R0 $\square$ 00	1.0	1MHz,200mV	0.095	1.80(1.60)	1.80(1.60)	20,30	B
AWVC002016101R5 $\square$ 00	1.5	1MHz,200mV	0.14	1.60(1.40)	1.60(1.40)	20,30	C
AWVC002016102R2 $\square$ 00	2.2	1MHz,200mV	0.19	1.30(1.10)	1.30(1.10)	20,30	D
AWVC002016103R3 $\square$ 00	3.3	1MHz,200mV	0.295	0.96(0.86)	0.98(0.88)	20,30	E
AWVC002016104R7 $\square$ 00	4.7	1MHz,200mV	0.36	0.84(0.75)	0.90(0.81)	20,30	F
AWVC002016105R6 $\square$ 00	5.6	1MHz,200mV	0.62	0.70(0.63)	0.75(0.67)	20,30	Y
AWVC002016106R8 $\square$ 00	6.8	1MHz,200mV	0.64	0.66(0.59)	0.70(0.63)	20,30	G
AWVC00201610100 $\square$ 00	10	1MHz,200mV	1.0	0.54(0.48)	0.56(0.50)	20,30	H
AWVC00201610150 $\square$ 00	15	1MHz,200mV	1.5	0.39(0.35)	0.42(0.37)	20,30	K
AWVC00201610180 $\square$ 00	18	1MHz,200mV	1.6	0.39(0.35)	0.41(0.36)	20,30	J
AWVC00201610220 $\square$ 00	22	1MHz,200mV	1.7	0.38(0.34)	0.40(0.36)	20,30	I
AWVC00201610330 $\square$ 00	33	1MHz,200mV	2.6	0.30(0.27)	0.28(0.25)	20,30	Q
AWVC00201610470 $\square$ 00	47	1MHz,200mV	3.7	0.28(0.25)	0.27(0.24)	20,30	S
AWVC00201610560 $\square$ 00	56	1MHz,200mV	4.4	0.26(0.23)	0.27(0.24)	20,30	W
AWVC00201610680 $\square$ 00	68	1MHz,200mV	4.5	0.24(0.21)	0.25(0.22)	20,30	T
AWVC00201610820 $\square$ 00	82	1MHz,200mV	7	0.22(0.19)	0.23(0.20)	20,30	X
AWVC00201610101 $\square$ 00	100	1MHz,200mV	7.8	0.21(0.19)	0.22(0.20)	20,30	R

Note: When ordering, please specify tolerance code. Tolerance: M= $\pm 20\%$ / T= $\pm 30\%$

1. Operating temperature range $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current

3. I rms for a 40°C temperature rise from 25°C ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

I rms: Agilent HP4284A


AWVC00201610 Type

Characteristics Graph

Inductance vs. DC Current

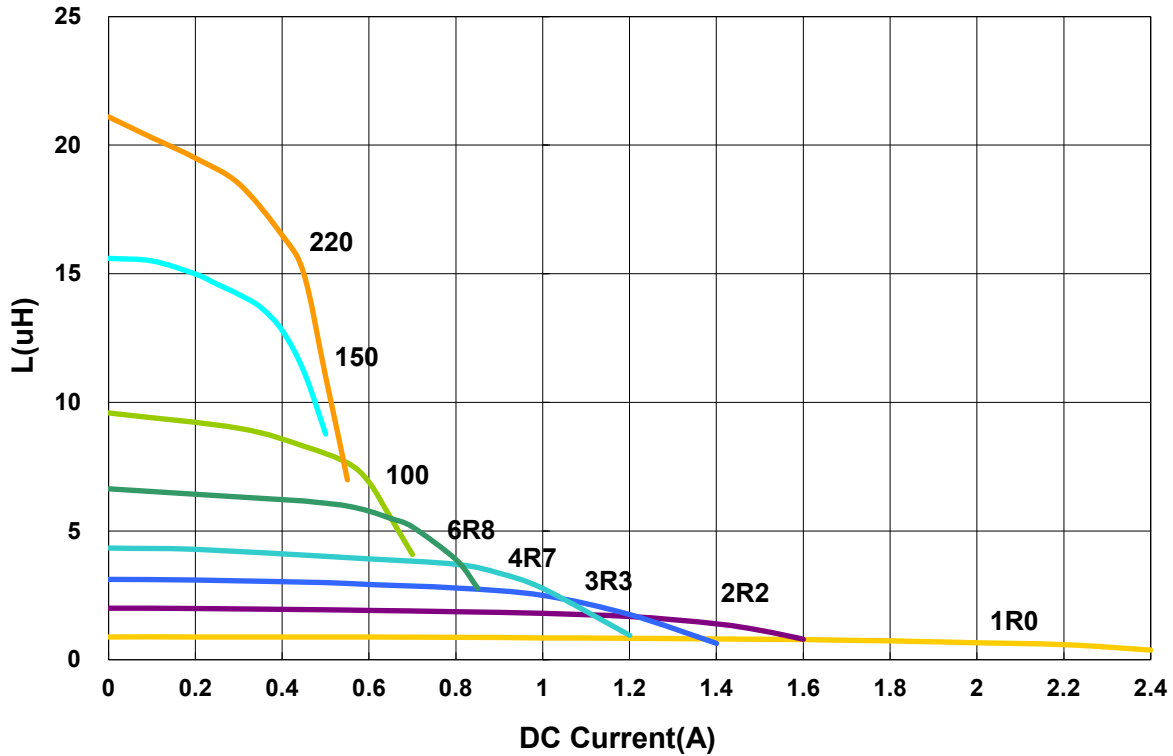

Temperature Change vs. DC Current

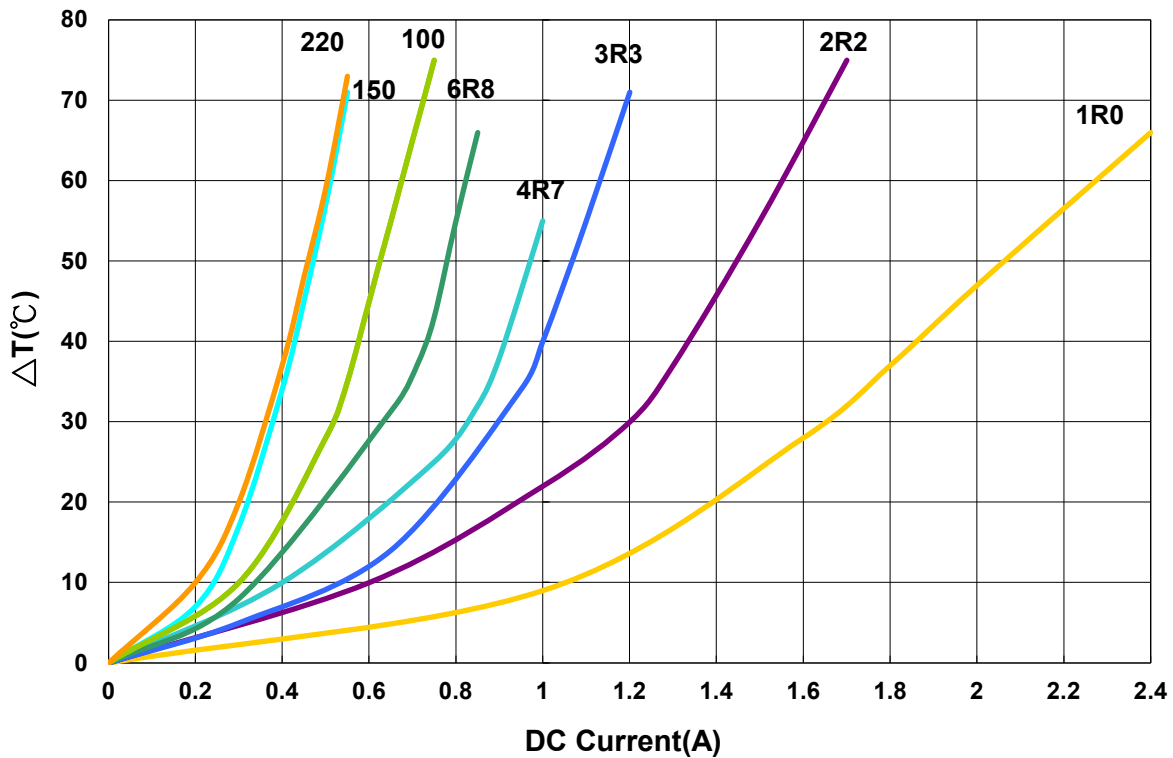


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series


Automotive
AEC-Q200

AWVC00201612 Type

■ Dimensions

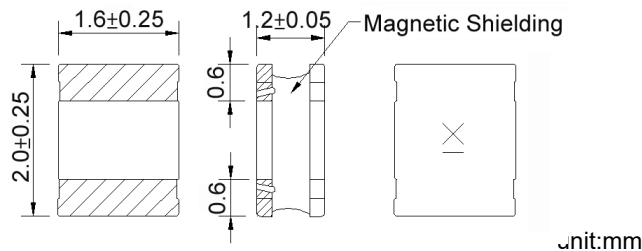

■ Recommended Land Pattern



■ Electrical Characteristics

Part No.	Inductance (μ H)	Test Freq.	RDC (Ω) $\pm 30\%$	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance ($\pm\%$)	Marking
AWVC00201612R50 $\square$ 00	0.5	1MHz,200mV	0.051	2.60(2.30)	2.30(2.00)	20,30	B
AWVC002016121R0 $\square$ 00	1.0	1MHz,200mV	0.083	1.90(1.70)	1.80(1.60)	20,30	C
AWVC002016122R2 $\square$ 00	2.2	1MHz,200mV	0.159	1.30(1.20)	1.30(1.20)	20,30	E
AWVC002016123R3 $\square$ 00	3.3	1MHz,200mV	0.22	1.10(0.99)	1.00(0.95)	20,30	F
AWVC002016124R7 $\square$ 00	4.7	1MHz,200mV	0.33	0.92(0.82)	0.90(0.81)	20,30	G
AWVC00201612100 $\square$ 00	10	1MHz,200mV	0.58	0.62(0.55)	0.58(0.52)	20,30	I
AWVC00201612150 $\square$ 00	15	1MHz,200mV	0.9	0.48(0.43)	0.45(0.40)	20,30	J
AWVC00201612220 $\square$ 00	22	1MHz,200mV	1.4	0.40(0.36)	0.40(0.36)	20,30	K

Note: When ordering, please specify tolerance code. Tolerance: M= $\pm 20\%$ / T= $\pm 30\%$

- Operating temperature range $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

Irms: Agilent HP4284A


AWVC00201612 Type

Characteristics Graph

Inductance vs. DC Current

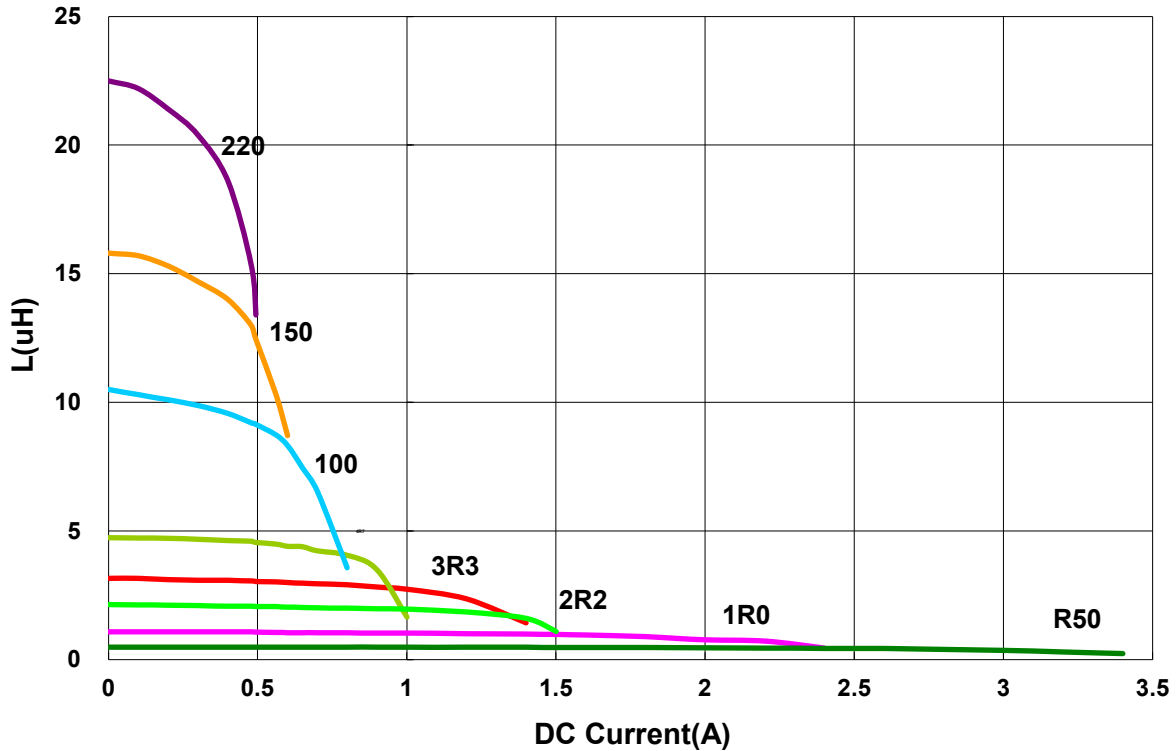

Temperature Change vs. DC Current

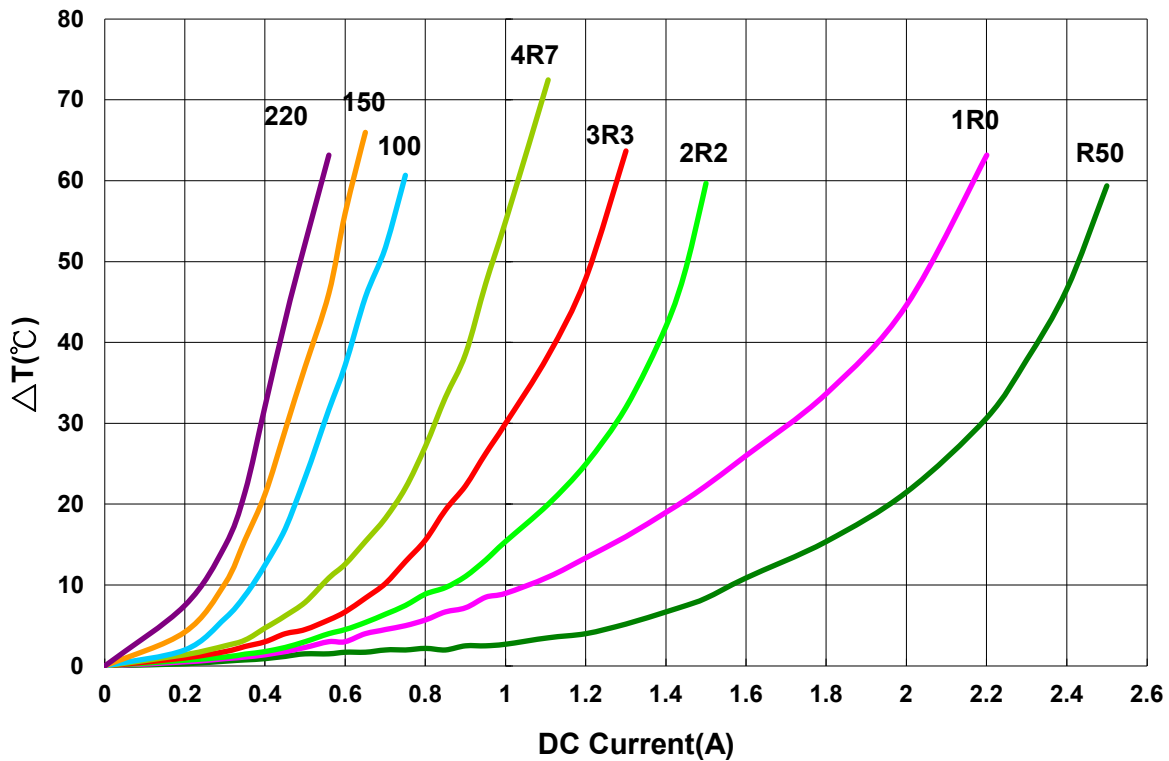


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

Automotive
AEC-Q200


AWVC00252012 Type

■ Dimensions

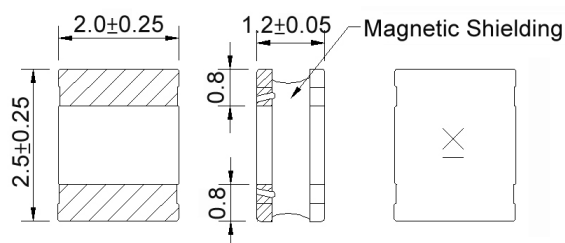

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±30%	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance (±%)	Marking
AWVC00252012R68□00	0.68	1MHz,200mV	0.035	2.80(2.50)	2.60(2.30)	20,30	N

Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%

1. Operating temperature range — 40℃ ~ 125℃ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current.

3. Irms for a 40℃ temperature rise from 25℃ ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

Irms: Agilent HP4284A


AWVC00252012 Type

■ Characteristics Graph

Inductance vs. DC Current

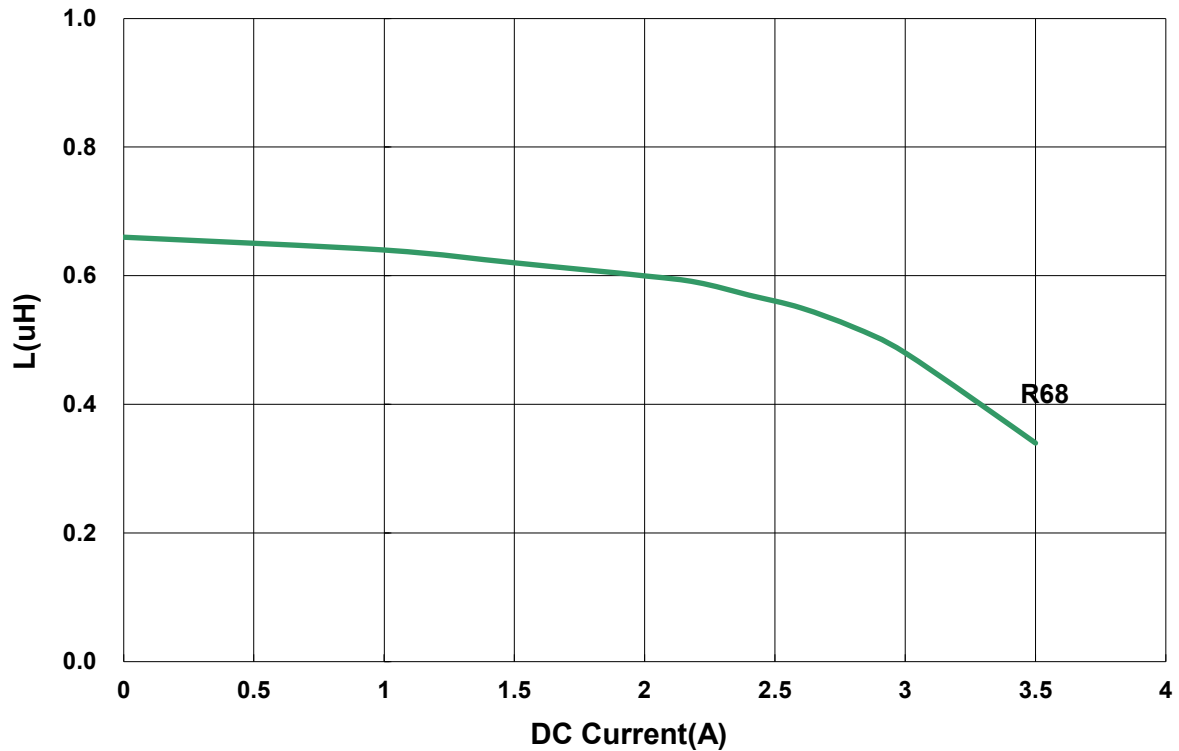

Temperature Change vs. DC Current

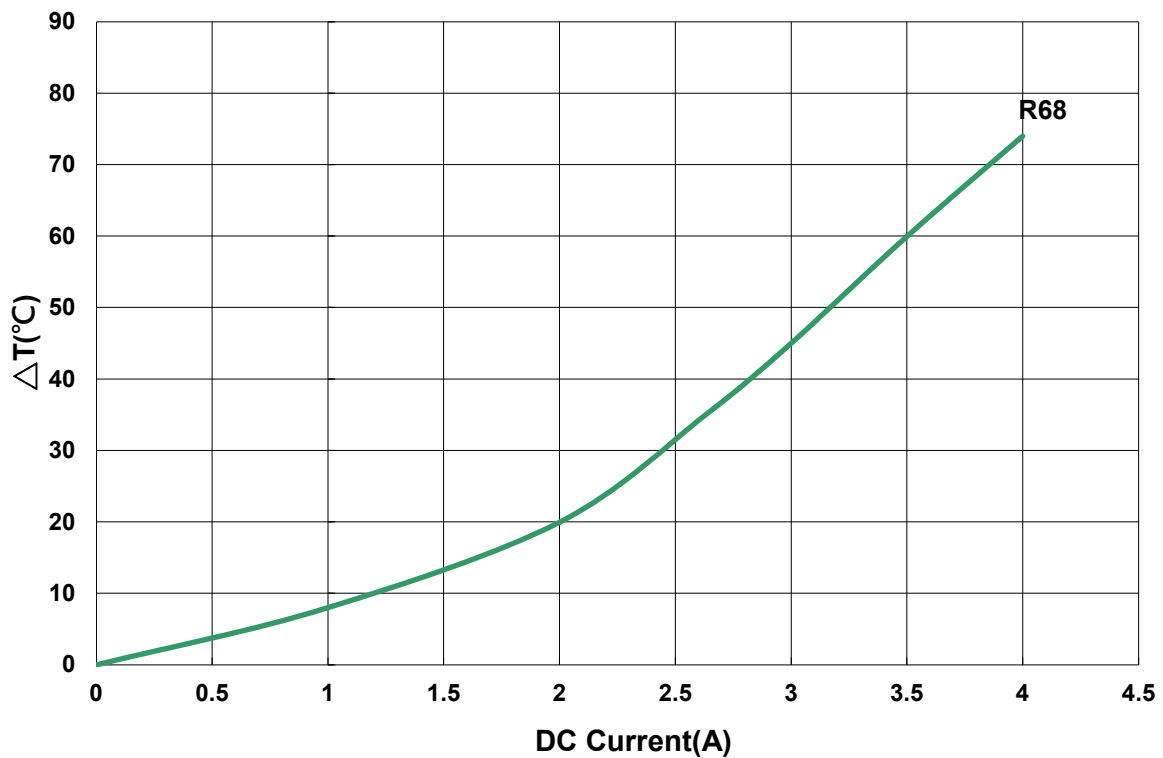


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

Automotive
AEC-Q200


AWVC00404018 Type

■ Dimensions

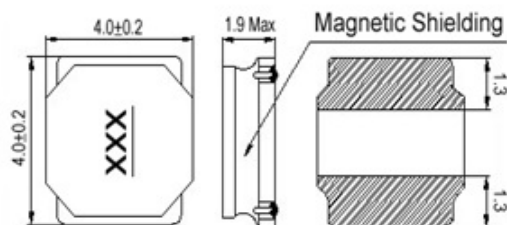

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±30%	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance (±%)	Marking
AWVC004040181R2□00	1.2	100kHz,1V	0.027	3.70(3.30)	3.60(3.20)	20,30	1R2
AWVC004040184R7□00	4.7	100kHz,1V	0.077	2.00(1.80)	1.80(1.60)	20,30	4R7
AWVC004040186R8□00	6.8	100kHz,1V	0.105	1.50(1.30)	1.35(1.20)	20,30	6R8
AWVC00404018100□00	10	100kHz,1V	0.160	1.40(1.20)	1.20(1.00)	20,30	100
AWVC00404018120□00	12	100kHz,1V	0.200	1.20(1.00)	1.10(0.99)	20,30	120
AWVC00404018150□00	15	100kHz,1V	0.245	1.05(0.94)	0.95(0.85)	20,30	150
AWVC00404018220□00	22	100kHz,1V	0.335	0.90(0.81)	0.88(0.79)	20,30	220

Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%

1. Operating temperature range -40℃ ~ 125℃ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current

3. Irms for a 40℃ temperature rise from 25℃ ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

Irms: Agilent HP4284A


AWVC00404018 Type

Characteristics Graph

Inductance vs. DC Current

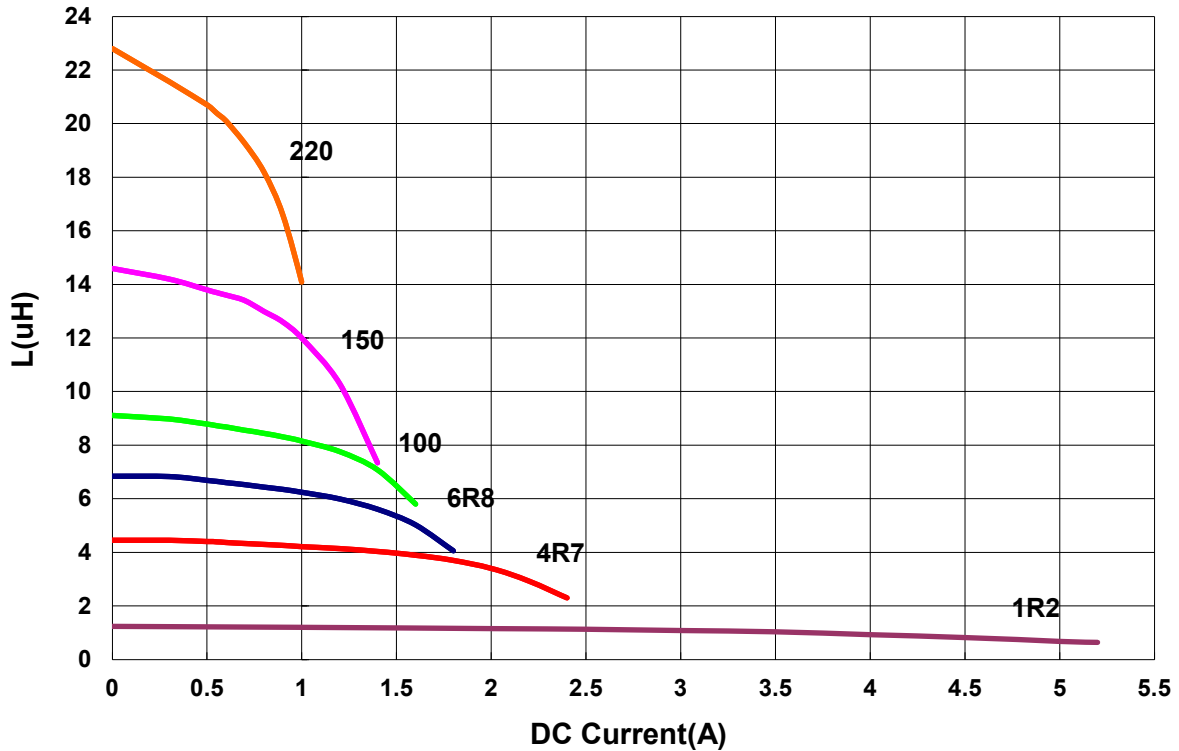

Temperature Change vs. DC Current

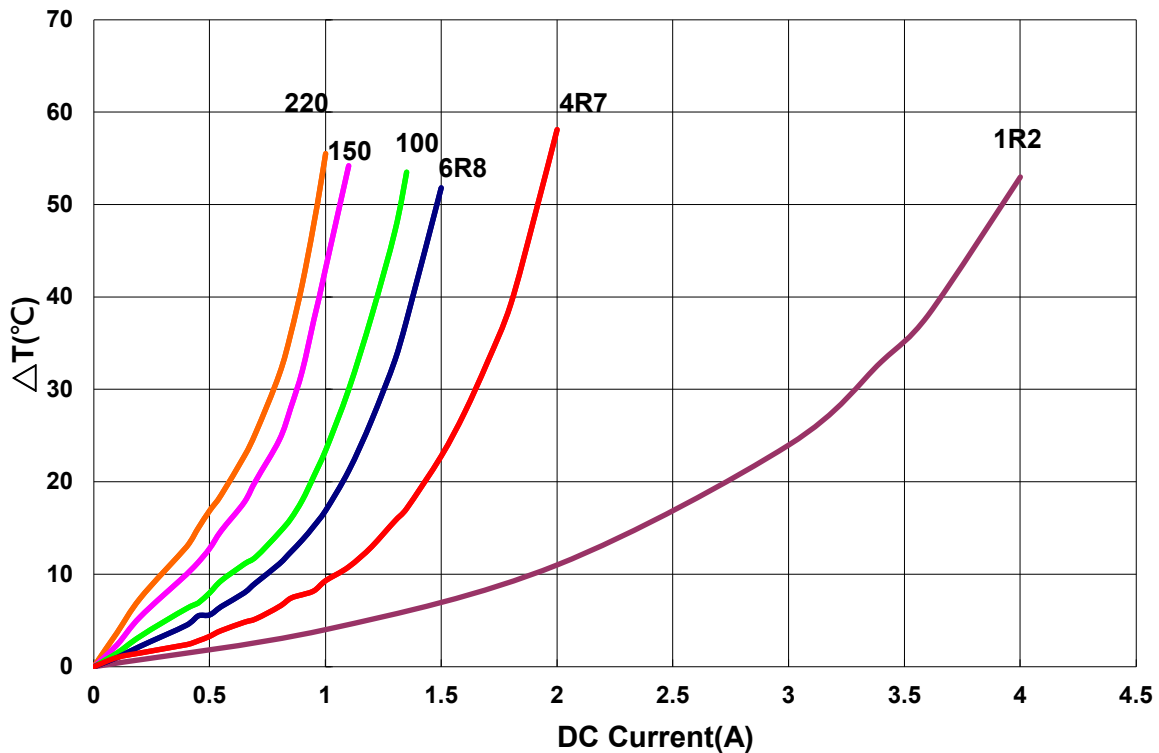


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

**Automotive
AEC-Q200**


AWVC00505040 Type

■ Dimensions

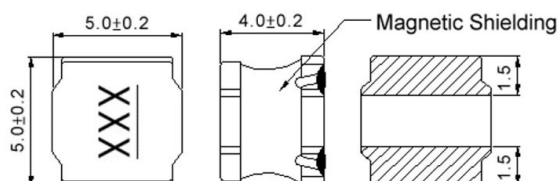

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±30%	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance (±%)	Marking
AWVC00505040R47□00	0.5	100kHz,1V	0.008	11.5(10.35)	7.6(6.84)	20,30	R47
AWVC005050401R0□00	1.0	100kHz,1V	0.012	8.8(7.9)	5.9(5.3)	20,30	1R0
AWVC005050401R5□00	1.5	100kHz,1V	0.014	7.9(7.1)	5.4(4.8)	20,30	1R5
AWVC005050402R2□00	2.2	100kHz,1V	0.020	6.8(6.1)	4.5(4.0)	20,30	2R2
AWVC005050402R7□00	2.7	100kHz,1V	0.026	6.0(5.4)	4.2(3.7)	20,30	2R7
AWVC005050403R3□00	3.3	100kHz,1V	0.026	5.3(4.7)	4.2(3.7)	20,30	3R3
AWVC005050404R7□00	4.7	100kHz,1V	0.032	4.4(3.9)	3.2(2.8)	20,30	4R7
AWVC005050406R8□00	6.8	100kHz,1V	0.050	3.8(3.4)	3.0(2.7)	20,30	6R8
AWVC005050408R2□00	8.2	100kHz,1V	0.065	3.3(2.9)	2.4(2.1)	20,30	8R2
AWVC00505040100□00	10	100kHz,1V	0.070	3.0(2.70)	2.3(2.0)	20,30	100
AWVC00505040150□00	15	100kHz,1V	0.115	2.4(2.1)	1.8(1.6)	20,30	150
AWVC00505040220□00	22	100kHz,1V	0.160	2.0(1.80)	1.6(1.4)	20,30	220
AWVC00505040101□00	100	100kHz,1V	0.700	0.85(0.76)	0.78(0.70)	20,30	101
AWVC00505040151□00	150	100kHz,1V	1.180	0.74(0.66)	0.58(0.52)	20,30	151
AWVC00505040181□00	180	100kHz,1V	1.250	0.67(0.60)	0.54(0.48)	20,30	181
AWVC00505040221□00	220	100kHz,1V	1.450	0.65(0.58)	0.50(0.45)	20,30	221

Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%

1. Operating temperature range — 40℃ ~ 125℃ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current

3. Irms for a 40℃ temperature rise from 25℃ ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

Irms: Agilent HP4284A


AWVC00505040 Type

Characteristics Graph

Inductance vs. DC Current

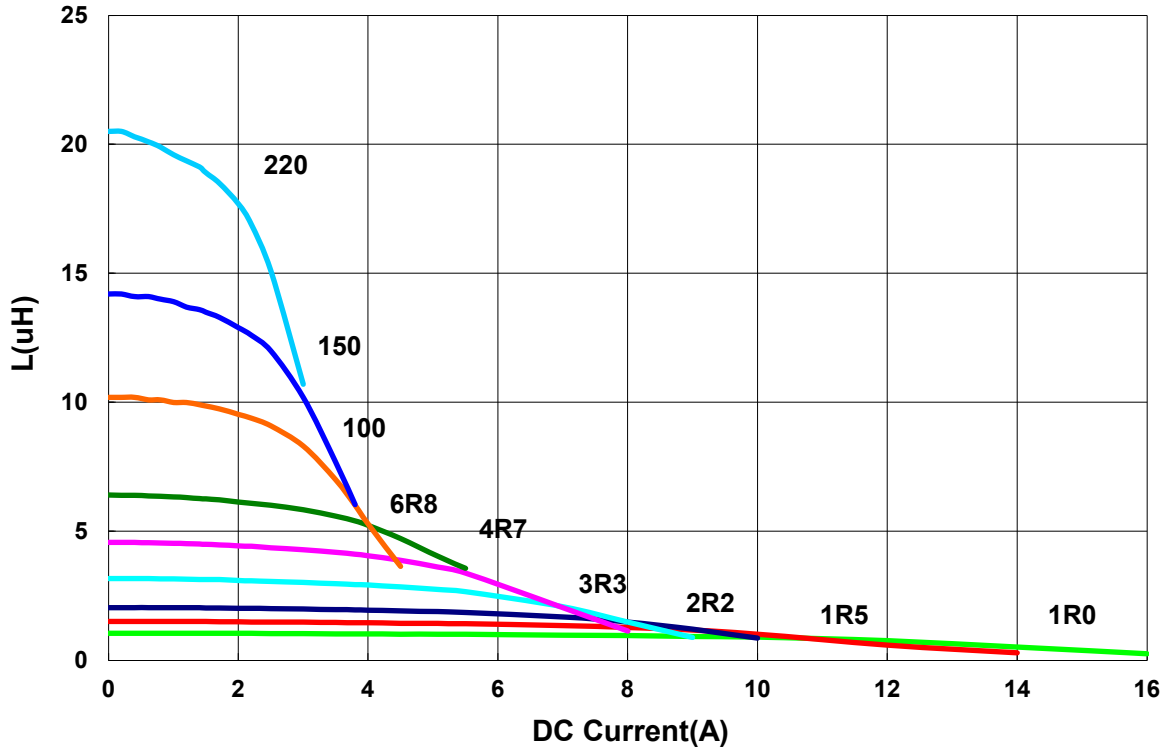

Temperature Change vs. DC Current

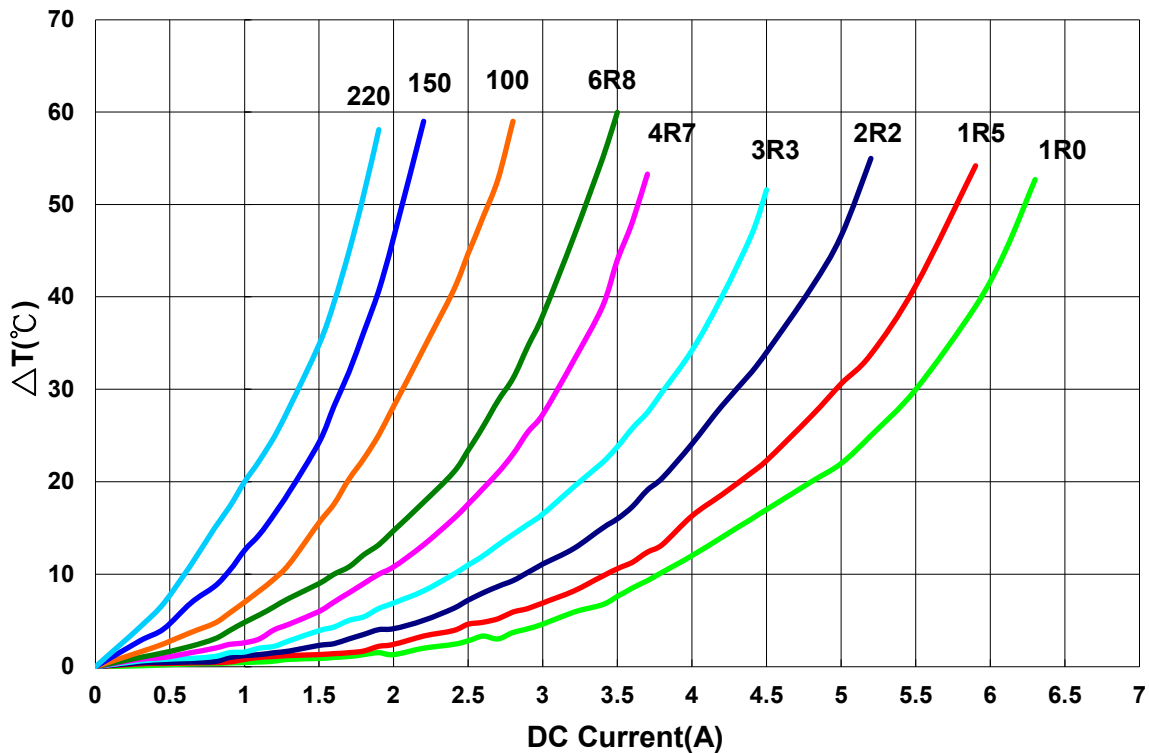


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

Automotive
AEC-Q200


AWVC00606028 Type

■ Dimensions

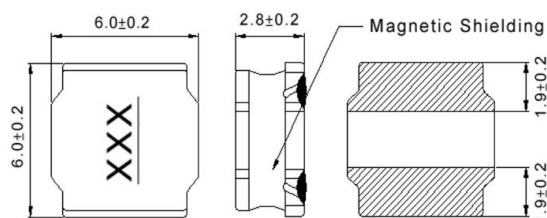

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±30%	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance (±%)	Marking
AWVC006060283R3□00	3.3	100kHz,1V	0.027	4.5(4.00)	4.0(3.60)	20,30	3R3
AWVC00606028100□00	10	100kHz,1V	0.065	2.6(2.30)	2.5(2.20)	20,30	100
AWVC00606028150□00	15	100kHz,1V	0.093	2.1(1.80)	2.0(1.80)	20,30	150
AWVC00606028220□00	22	100kHz,1V	0.135	1.7(1.50)	1.65(1.40)	20,30	220

Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%

1. Operating temperature range —40℃～125℃ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current

3. Irms for a 40℃ temperature rise from 25℃ ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A



RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent

Isat: Agilent HP4284A

Irms: Agilent HP4284A

AWVC00606028 Type

Characteristics Graph

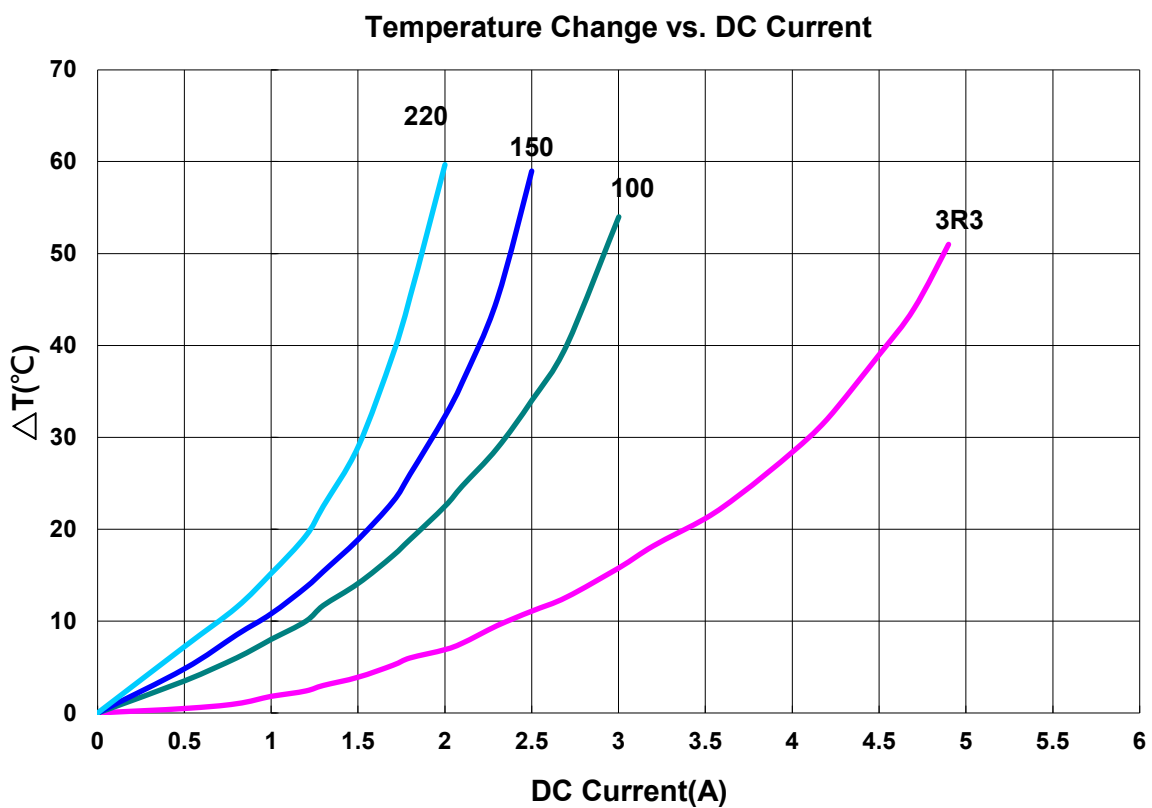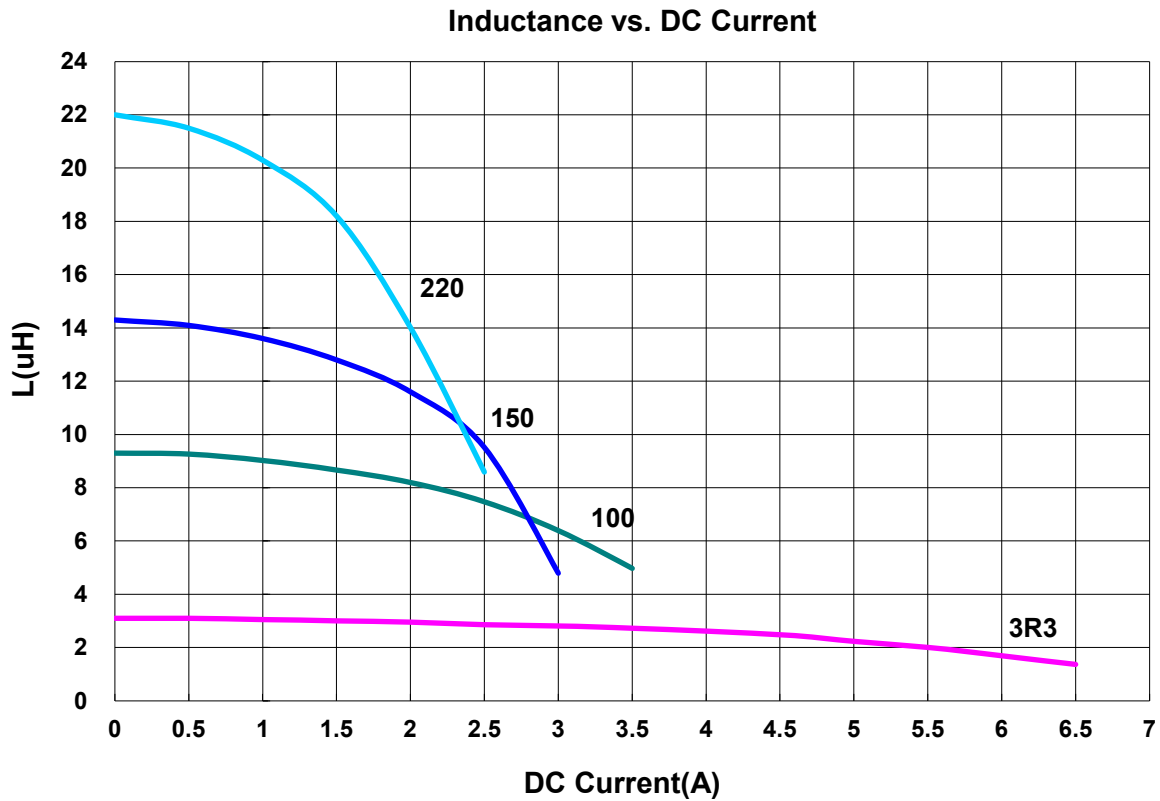


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

Automotive
AEC-Q200


AWVC00606045 Type

■ Dimensions

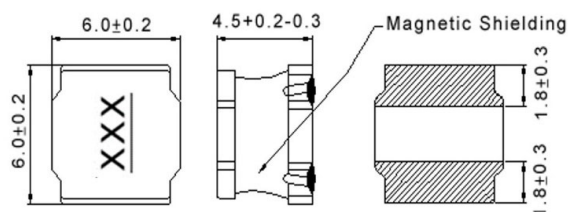

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±30%	Isat(A) Typ.(Max)	Irms(A) Typ.(Max)	Tolerance (±%)	Marking
AWVC006060451R0□00	1	100kHz,1V	0.010	13(11.50)	7.3(6.50)	20,30	1R0
AWVC006060451R5□00	1.5	100kHz,1V	0.012	12(10.50)	6.6(5.90)	20,30	1R5
AWVC006060452R2□00	2.2	100kHz,1V	0.018	9.5(8.50)	5.2(4.60)	20,30	2R2
AWVC006060453R3□00	3.3	100kHz,1V	0.022	7.8(7.00)	4.4(3.90)	20,30	3R3
AWVC006060454R7□00	4.7	100kHz,1V	0.030	6.8(6.10)	4.0(3.60)	20,30	4R7
AWVC006060456R8□00	6.8	100kHz,1V	0.042	5.7(5.10)	3.3(2.90)	20,30	6R8
AWVC00606045100□00	10	100kHz,1V	0.060	4.6(4.10)	2.6(2.30)	20,30	100
AWVC00606045150□00	15	100kHz,1V	0.090	3.8(3.40)	2.2(1.90)	20,30	150
AWVC00606045220□00	22	100kHz,1V	0.130	3.3(2.90)	1.9(1.70)	20,30	220
AWVC00606045470□00	47	100kHz,1V	0.255	2.2(1.98)	1.3(1.17)	20,30	470
AWVC00606045151□00	150	100kHz,1V	0.970	0.95(0.85)	0.65(0.58)	20,30	151

Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%

1. Operating temperature range -40℃ ~ 125℃ (Including self - temperature rise)

2. Isat for Inductance drop 30% from its value without current

3. Irms for a 40℃ temperature rise from 25℃ ambient with current

4. Measure Equipment:

L: HP4285A+HP42841A

RDC: DIGITAL MILLINHM METER CHROMA 16502, or equivalent


Isat: Agilent HP4284A

Irms: Agilent HP4284A


AWVC00606045 Type

Characteristics Graph

Inductance vs. DC Current

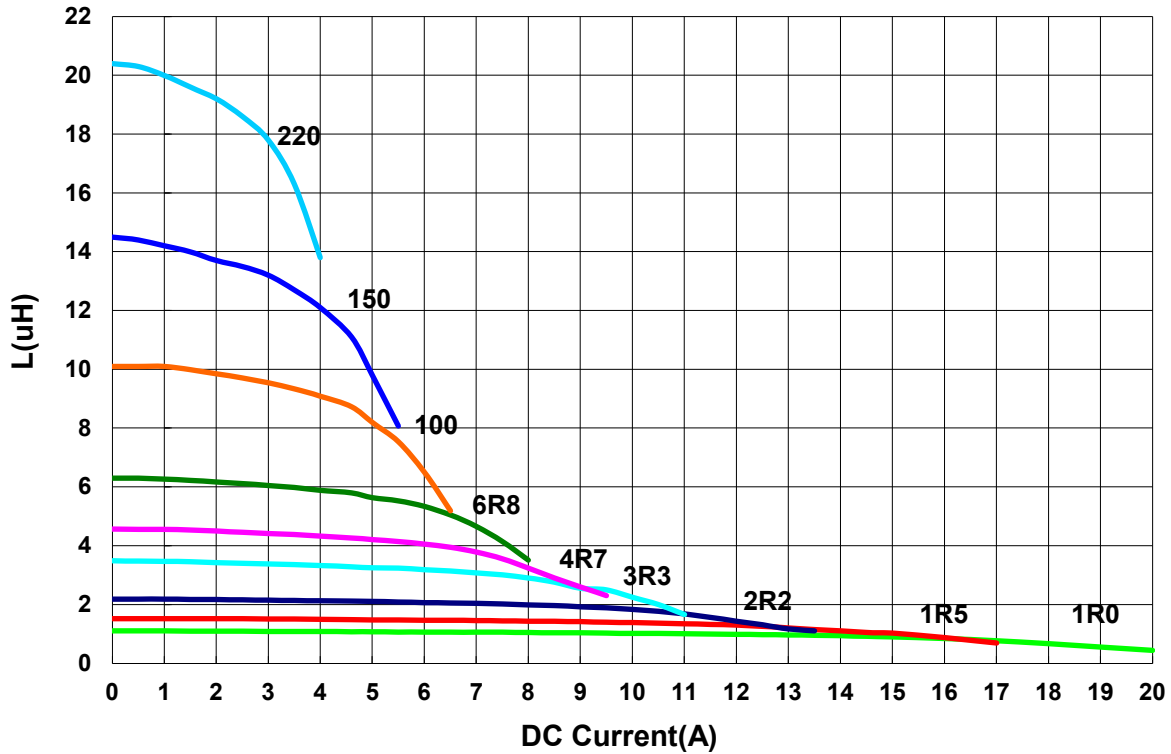

Temperature Change vs. DC Current

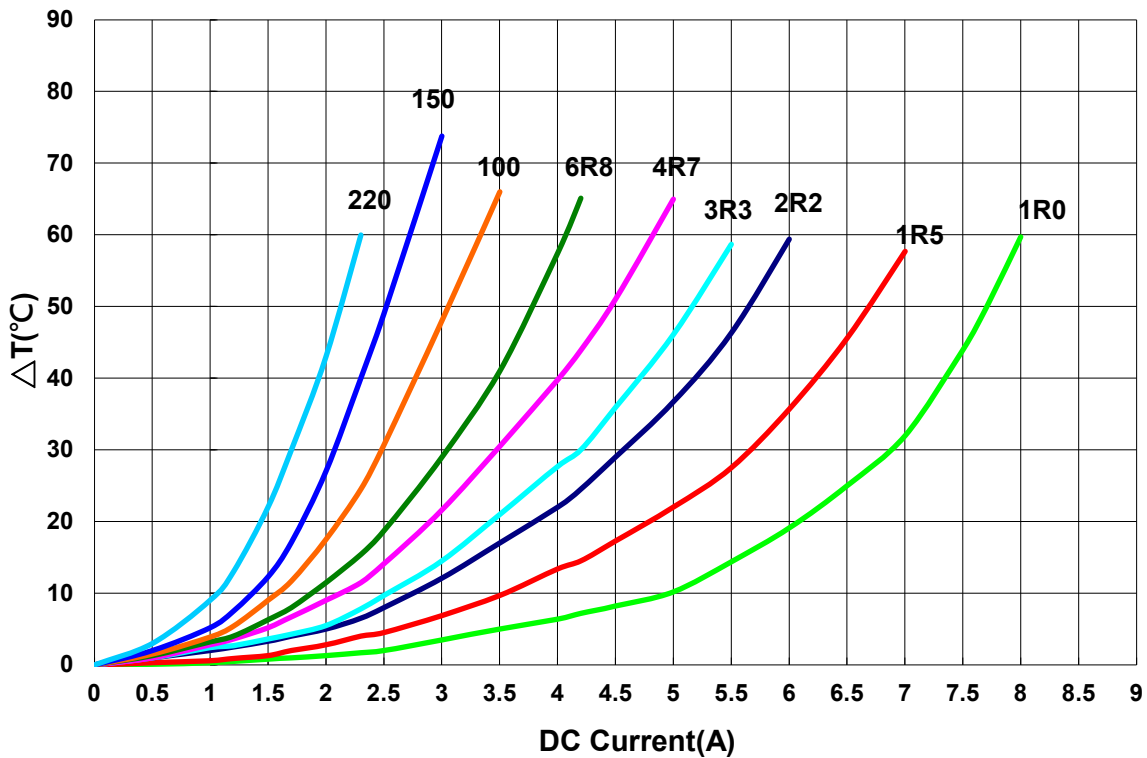

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Power Inductor AWVC Series

Automotive
AEC-Q200

■ Packaging

Tape Dimensions

Figure 1


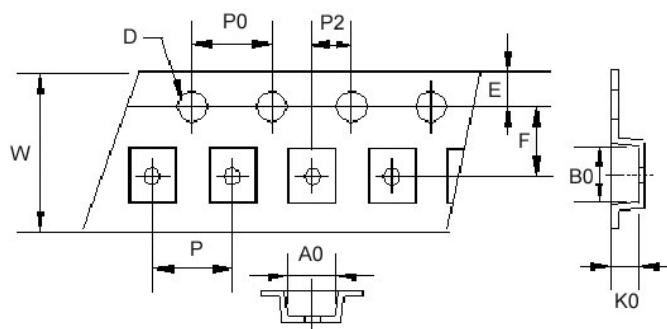


Figure 2

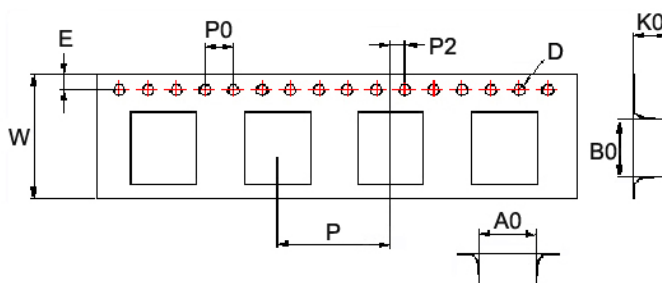

Reel Dimensions

Figure 1


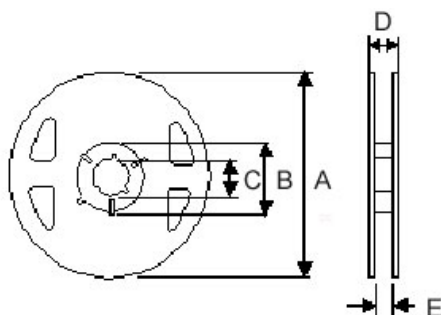


Figure 2

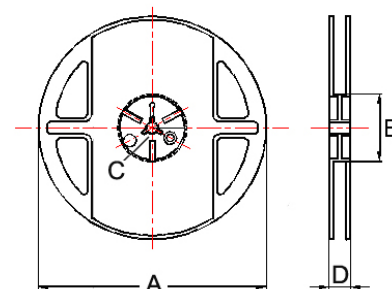

Dimensions in mm

TYPE	Fig	Tape Dimensions										Reel Dimensions					Quantity PCS / Reel
		A0	B0	K0	D	E	F	W	P	P0	P2	A	B	C	D	E	
AWVC00201610	1	1.9	2.2	1.15	1.55	1.75	3.5	8	4	4	2	180	60	13	14.4	8.4	2000
AWVC00201612	1	1.9	2.2	1.3	1.55	1.75	3.5	8	4	4	2	180	60	13	14.4	8.4	2000
AWVC00252012	1	2.40	2.70	1.35	1.55	1.75	3.5	8	4	4	2	180	60	13	14.4	8.4	2000
AWVC00404018	2	4.25	4.25	2.1	1.55	1.75	5.5	12	8	4	2	178	60	13	13.2	-	800
AWVC00505040	2	5.2	5.2	4.2	1.55	1.75	5.5	12	8	4	2	330	100	13	13.4	-	1500
AWVC00606028	2	6.25	6.25	3.00	1.55	1.75	7.5	16	12	4	2	330	100	13	16	-	1500
AWVC00606045	2	6.2	6.2	4.65	1.55	1.75	5.5	12	8	4	2	330	100	13	13.4	-	1000