

Harvatek Surface Mount CHIP LEDs Approval Sheet
Model No.: HT-150TW-5518

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 1/15

DISCLAIMER	3
PRODUCT SPECIFICATION	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	4
LABEL SPEC.:	5
PRODUCT FEATURE	8
ELECTRO-OPTICAL CHARACTERISTICS	8
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW	
SOLDERING	8
ABSOLUTE MAXIMUM RATINGS	8
CHARACTERISTICS OF HT-150 SERIES	9
PACKAGING TAPE, REEL, AND PACKING MODEL	10
TAPE DIMENSION	10
REEL DIMENSION	11
PACKING	11
DRY PACK	12
PRECAUTIONS	12
REFLOW SOLDERING	12
REWORKING	13
CLEANING	13
RELIABILITY TEST	14
REVISION HISTORY	15

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 2/15

DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 3/15

Product Specification

	Specification	Material	Quantity
Iv	S: 180-285 mcd T: 285-360 mcd @20mA/ Ta= 25° C Tolerance: ± 10%		
lambda(λ _D)	As page 6 & 7. @20mA/ Ta= 25° C		
Vf	2.7-3.9 V (0.2V/1BIN) @20mA/ Ta= 25° C Tolerance: ± 0.05V		
Ir	< 100 μA @ V _R = 5 V		
Resin	Yellow	Epoxy resin	
Carrier tape	According to EIA 481-1A specs	Conductive Black tape	3000pcs per reel
Reel	According to EIA 481-1A specs	Conductive Black	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel one bag
Carton	HT standard	Paper	Non-specified

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv, λ_D and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaP based chips are **STATIC SENSITIVE devices**. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 4/15

Label Spec.:

HARVATEK RE890917.C7081008 00002332			DATE: dd/mm/yyyy 	
CUSTOMER P/N: 				
HARVATEK P/N: 		QTY: 	PCS	
LOT NO: 		QC: 		
IV: 	CR: 	VF: 		

■ Customer P/N: To Be Defined

■ Harvatek P/N

H T - 1 5 0 T W - 5 5 1 8

Series Name	Emitting Color	Customer Code
HT-150: 3.2x1.6x1.1mm	TW: White @ 20mA	5518 Customer Product Code

■ Lot No.

1	2	3	4	5	6	7	8	9	10
E	1	A	1	A	2	2	L	1	2
Code 1 2		Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecutive number		Special code		
Internal Tracing Code		2010-A	1:Jan.	1:A	01~ZZ		000~ZZZ		
		2011-B	2:Feb.	2:B					
		2012-C		3:C					
		2013-D	A:Oct.	26:Z					
		.	B:Nov.	27:7					
		.	C:Dec.	28:8					
				29:9					
				30:3					
				31:4					

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 5/15

■ Luminous Intensity (Iv) Bin:


Color	Bin Code	Spec. Range
White	S	180-285 mcd
	T	285-360 mcd

■ Color Bin

	Bin Code	Spec. Range		Bin Code	Spec. Range	
White	C1	x	Y	C2	x	Y
		0.2500	0.2050		0.2700	0.2325
		0.2500	0.2500		0.2700	0.2775
		0.2700	0.2775		0.2900	0.3050
		0.2700	0.2325		0.2900	0.2600
	D1	x	Y	D2	x	Y
		0.2900	0.2600		0.3100	0.2875
		0.2900	0.3025		0.3100	0.3325
		0.3100	0.3325		0.3300	0.3600
		0.3100	0.2875		0.3300	0.3150

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 6/15

■ Chromaticity Coordinate:

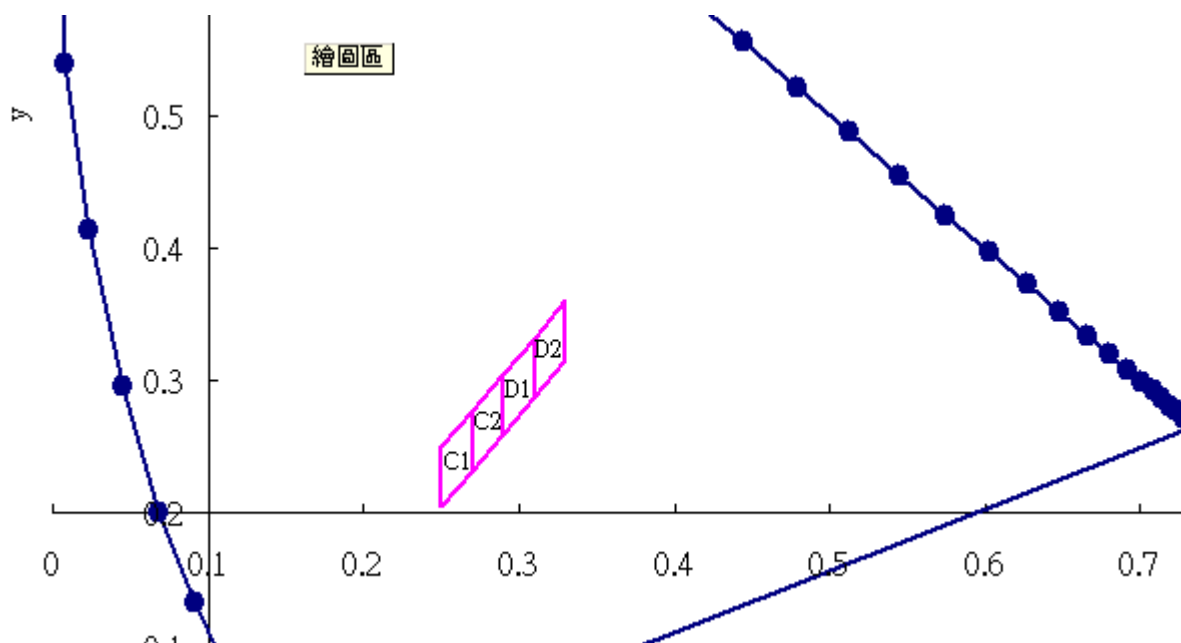

■ Vf Bin:

Color	Bin Code	Spec. Range
White	G8	2.7-2.9V
	H7	2.9-3.1V
	H8	3.1-3.3V
	J7	3.3-3.5V
	J8	3.5-3.7V
	K7	3.7-3.9V

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 7/15

Product Feature

Electro-Optical Characteristics

Code for parts	Lighting Color	Material	$V_F(V)$		λ (nm)	$I_V^*(mcd)$
			typ	max	λ_D	typ
HT-150TW	White	InGaN	3.2	3.9	X:0.29 Y:0.32	285

(I_F @ 20mA, T_a 25 °C)

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

Unit: mm Tolerance: +/-0.1

Outline Dim.	Soldering Pattern
Soldering terminal may shift in x, y direction.	

Absolute Maximum Ratings

(T_a 25 °C)


Series	P_d (mW)	I_F (mA)	I_{FP} (mA)	V_R (V)	I_R (uA)	T_{OP} (°C)	T_{ST} (°C)
HT-150TW	78	20	80**	5	<100@ $V_R = 5$	-30~+80	-40~+85

** Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width


Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 8/15

Characteristics of HT-150 Series


Forward Voltage vs. Forward Current

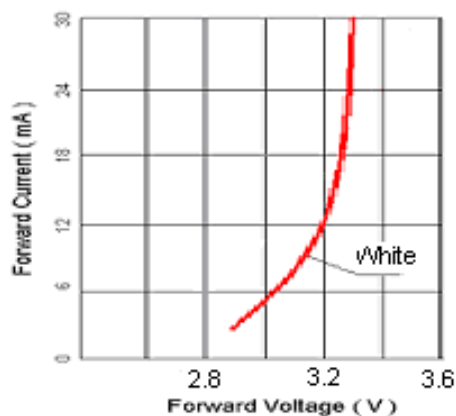


Relative Intensity vs. Forward Current

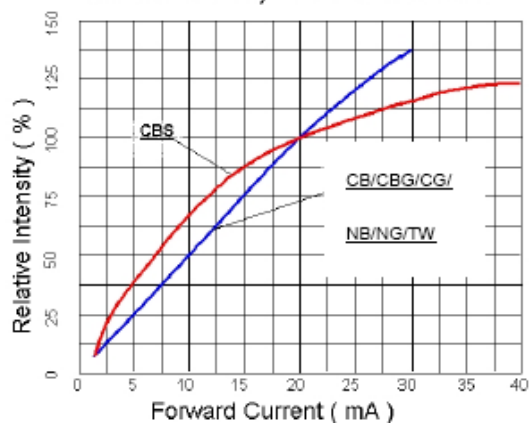


Forward Current vs. Ambient Temperature

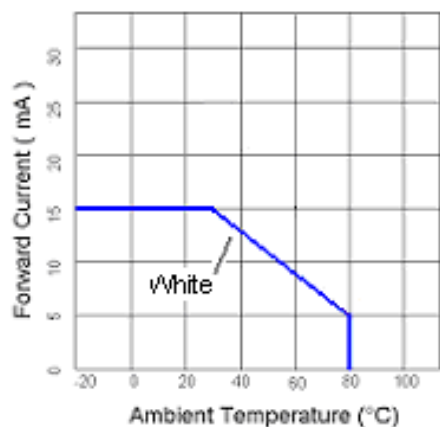


Relative Intensity vs. Wavelength

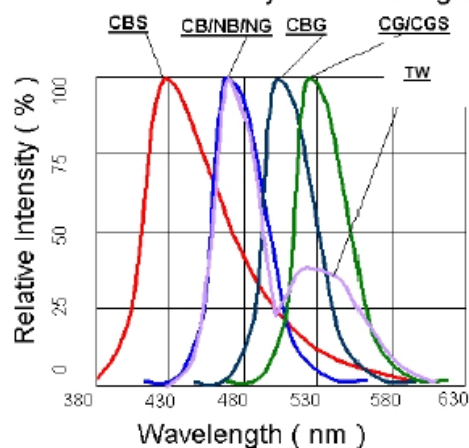

Directive Characteristics

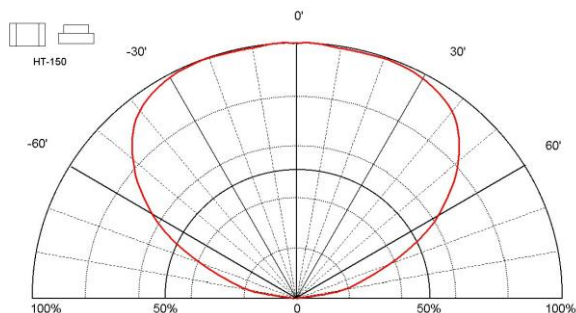


Directive Characteristics

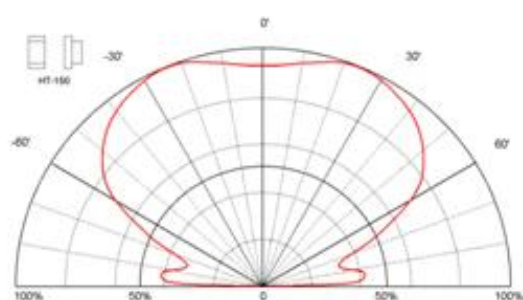


Official Product	HT Part No. HT-150TW-5518	Your Part No.	Data Sheet No.
Tentative Product	*****	*****	HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0
			Page 9/15

Packaging Tape, Reel, and Packing Model Tape Dimension

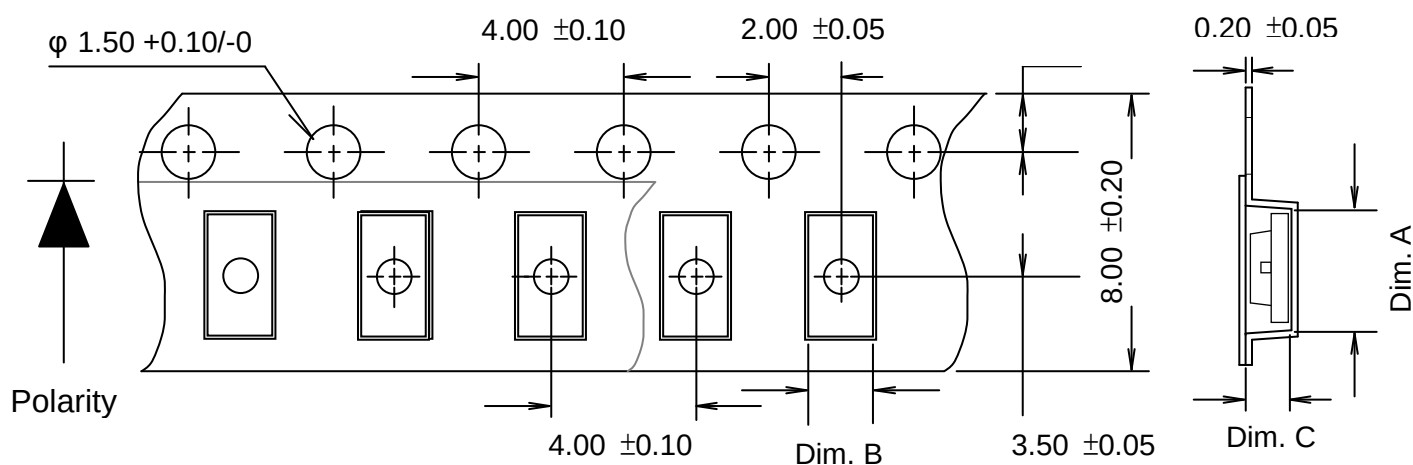


Part No.	Dim. A	Dim. B	Dim. C	Q'ty/Reel
HT-150	3.50 ± 0.10	1.88 ± 0.10	1.27 ± 0.10	3K

Unit: mm

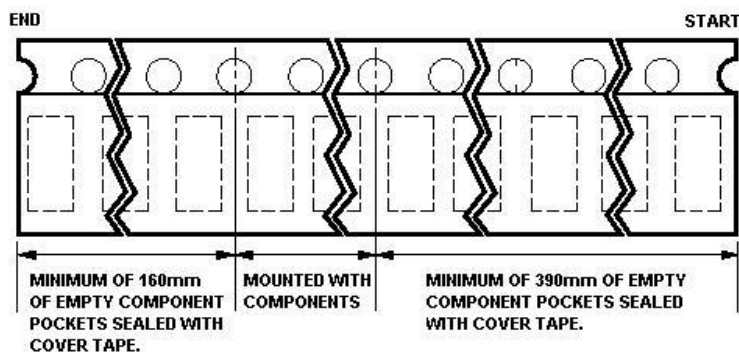


Official Product	HT Part No. HT-150TW-5518	Your Part No.	Data Sheet No.
Tentative Product	*****	*****	HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0
			Page 10/15

Reel Dimension

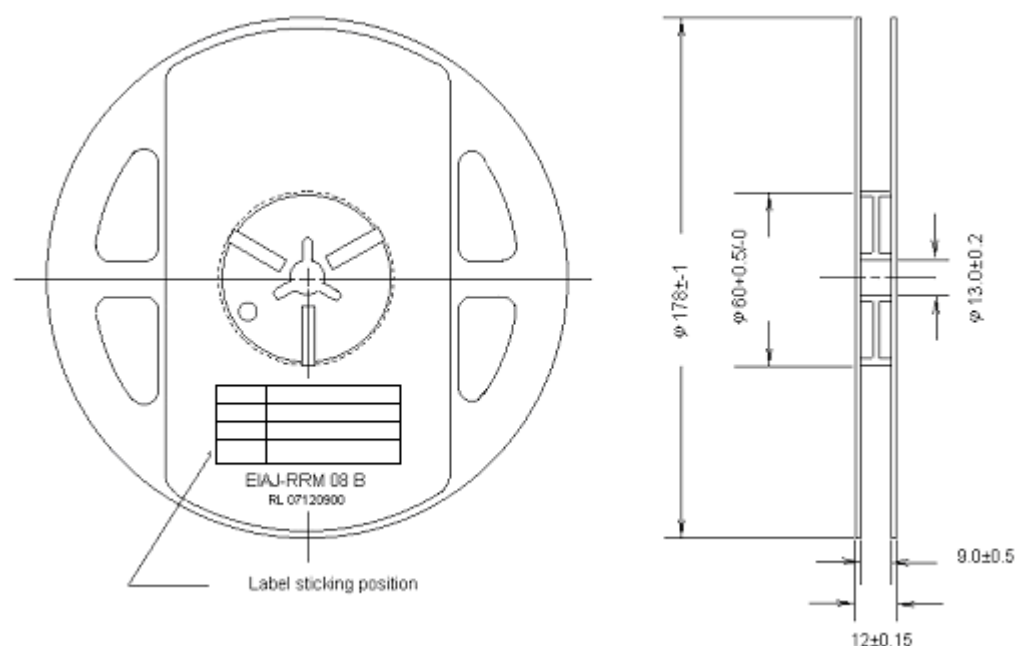

Packing

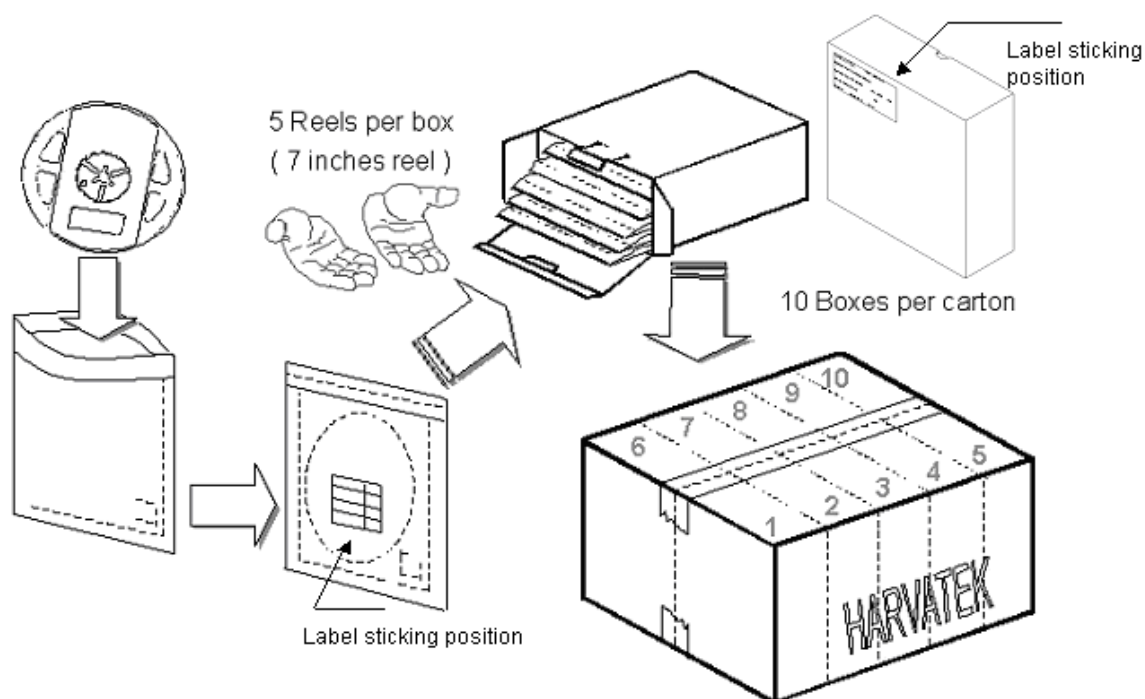

5 boxes per carton is available depending on shipment quantity.


Official Product	HT Part No. HT-150TW-5518	Your Part No.	Data Sheet No.
Tentative Product	*****	*****	HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0
			Page 11/15

Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

Upon request, a humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

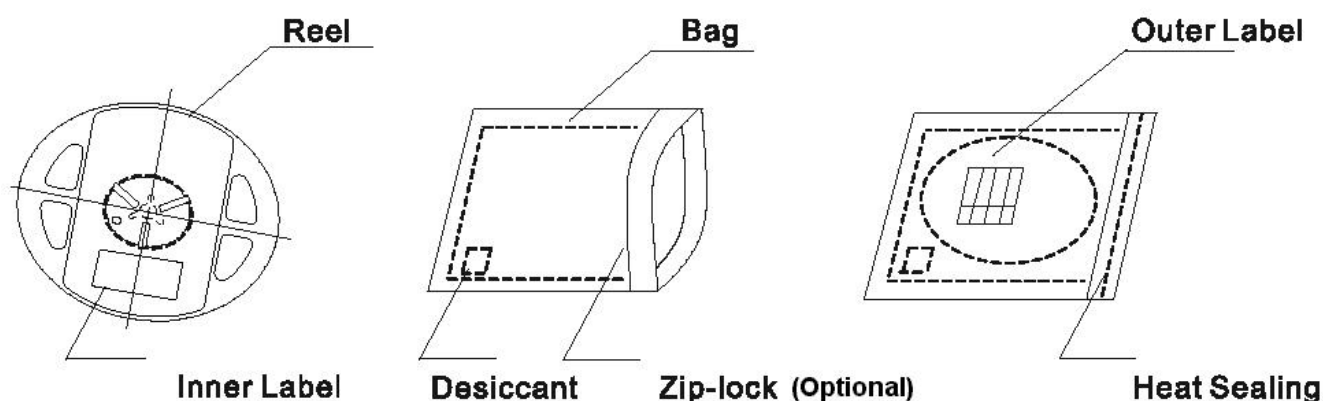

PRECAUTIONS

1. Avoid exposure to moisture at all times during transportation or storage.
2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlInGaP products.
3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
5. Avoid direct contact with the surface through which the LED emits light.
6. If possible, assemble the unit in a clean room or dust-free environment.

Reflow Soldering


Recommend soldering paste specifications:

1. Operating temp.: Above 220 °C ,60 sec.
2. Peak temp.:260 °CMax.,10sec Max.

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 12/15

- Never attempt next process until the component is cooled down to room temperature after reflow.
- The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

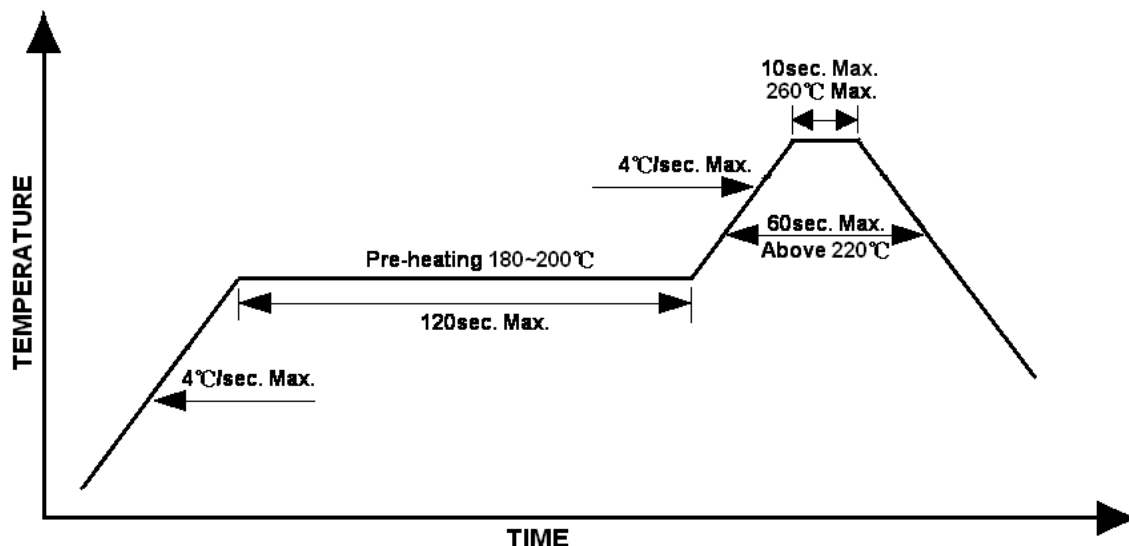

Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultrasonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 13/15

Reliability Test

Item	Frequency/ lots/ samples/ failures	Standards Reference	Conditions
Precondition	For all reliability monitoring tests according to JEDEC Level 2	J-STD-020	1.) Baking at 85°C for 24hrs 2.) Moisture storage at 85°C/ 60% R.H. for 168hrs
Solder ability	1Q/ 1/ 22/ 0	JESD22-B102-B And CNS-5068	Accelerated aging 155°C/ 24hrs Tinning speed: 2.5±0.5cm/s Tinning: A: 215°C/ 3±1s or B: 260°C/ 10±1s
Resistance to soldering heat		CNS-5067	Dipping soldering terminal only Soldering bath temperature A: 260±/-5°C; 10±/-1s B: 350±/-10°C; 3±/-0.5s
Operating life test	1Q/ 1/ 40/ 0	CNS-11829	1.) Precondition: 85°C baking for 24hrs 85°C/ 60%R.H. for 168hrs 2.) T _{amb} 25°C; I _F =20mA; duration 1000hrs
High humidity, high temperature bias	1Q/ 1/ 45/ 0	JESD-A101-B	T _{amb} : 85°C Humidity: 85% R.H., I _F =5mA Duration: 1000hrs
High temperature bias	1Q/ 1/ 20/ 0	HT specs.	T _{amb} : 55°C I _F =20mA Duration: 1000hrs
Pulse life test	1Q/ 1/ 40/ 0		T _{amb} 25°C, I _F =20mA,, I _p =100mA, Duty cycle=0.125 (tp=125μ s,T=1sec) Duration 500hrs)
Temperature cycle	1Q/ 1/ 76/ 0	JESD-A104-A IEC 68-2-14, Nb	A cycle: -40 degree C 15min; +85 degree C 15min Thermal steady within 5 min.. 300 cycles 2 chamber/ Air-to-air type
High humidity storage test	1Q/ 1/ 40/ 0	CNS-6117	60±3°C 90±5/-10% R.H. for 500hrs
High temperature storage test	1Q/ 1/ 40/ 0	CNS-554	100±10°C for 500hrs
Low temperature storage test	1Q/ 1/ 40/ 0	CNS-6118	-40±5°C for 500hrs

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 14/15

Revision History

Changes since last revision	Page	Version No.	Revision Date
New format		1.0	2010/2/3

Official Product	HT Part No. HT-150TW-5518	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HT-150TW-5518
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		2010/02/03	Version of 1.0	Page 15/15