

M.2 2280 SSD

IM2P33E8



The ADATA IM2P33E8 PCIe Gen3x4 M.2 2280 SSD is equipped with 3D TLC NAND flash for excellent read/write performance and high capacities. Its 3K P/E cycle rating ensures long-lasting durability while a DRAM Buffer offers improved IOPS and read and write speeds. What's more, with LDPC ECC error correction and RAID Engine, the IM2P33E8 ensures data accuracy and integrity. The SSD comes in a range of capacities for different requirements. Customers can also benefit from ADATA's proprietary A+ SSSDTool software for easy management and real-time monitoring of ADATA SSDs. The IM2P33E8 is ideal for IoT, networking, servers, data centers, automation and IPC.

Features

- PCIe Gen3x4/ NVMe 1.3 support
- 3K P/E cycle rating for excellent durability and reliability
- Comes with DRAM Buffer
- LDPC ECC error correction, RAID Engine, and SLC Cache
- End-to-End Data Path Protection
- Thermal Throttling automatically adjusts temperatures for prolonged product lifespan
- Suitable for IoT-related, networking, servers, data centers, automation, and IPC


Ordering Information

Operating Temp.	256GB	512GB	1TB	2TB
0°C to 70°C	IM2P33E8-256GCTB4	IM2P33E8-512GCTB4	IM2P33E8-001TCTB4	IM2P33E8-002TD

Specifications

Model	IM2P33E8
Form Factor	M.2 2280
Capacity	256GB – 2TB
Interface	PCIe Gen3x4
Flash Type	96L 3D TLC
Dimensions (L x W x H)	80 x 22 x 2.25mm
Sequential Read (Max.)	3400MB/s
Sequential Write (Max.)	2800MB/s
Operating Temperature	0°C to 70°C
Operating Voltage	3.3V
Power Consumption (Max)	5.8W
Shock Resistance	1500G/0.5ms, Half Sine Wave
Operating Humidity	5%-95% RH, non-condensing
Vibration Resistance	20G (20-2000Hz)
Technologies	LDPC ECC, RAID Engine, Wear Leveling, SLC Cache, TRIM command, DRAM Buffer, Thermal Throttling, S.M.A.R.T. Monitor, End-to-End Data Path Protection,

Diagram

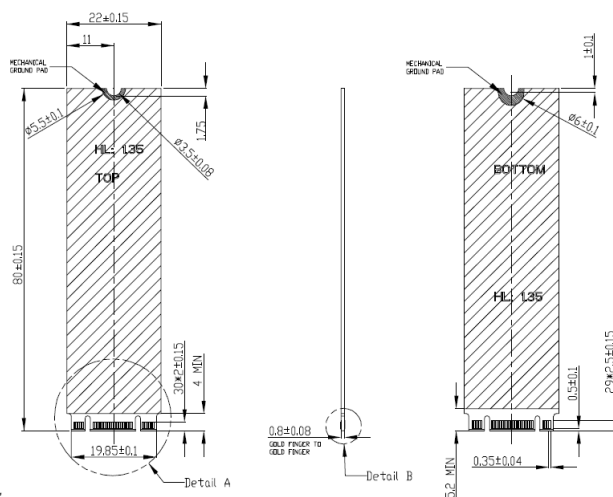

Unit: mm

Contact Us

HQ (Taiwan):

T: +886-8228-0886

E: adata@adata.com

US:

T: +1-714-332-8708

E: IASales_us@adata.com

EU:

T: +49-899-0405-296

E: IASales_eu@adata.com

China

T: +86-21-6233-1010

E: IASales_cn@adata.com

JP:

T: +81-3-5807-0011

E: IASales_jp@adata.com

APAC/MEA:

E: IASales_apacmea@adata.com