



TOP VIEW

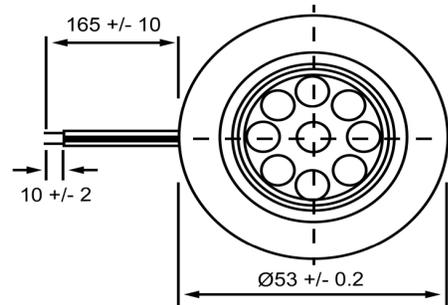

SIDE VIEW

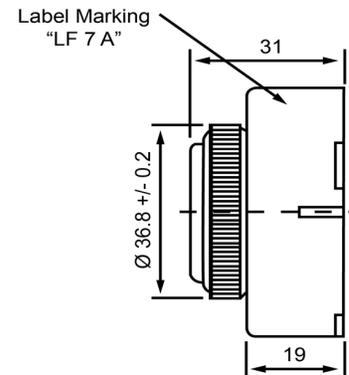

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,800	(Hz)									
Rated Voltage	6	(V)									
SPL @ 10cm	103	(dBA)									
Tone	Single										
Mount Type	Panel										
Voltage Range	3 ~ 12	(V)									
Max Rated Current	20	(mA)									
Housing Material	NORYL										
Operating Temperature	-30 ~ +70	°C									
Storage Temperature	-30 ~ +70	°C									
Weight	38	(g)									
 DB UNLIMITED			 Piezo Indicator			IP532806-1					

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.