

2.5" SSD

ISSS316



The 2.5-inch ADATA ISSS316 industrial-grade SSD is equipped with 96-layer 3D TLC (BiCS4) NAND flash to provide excellent read and write performance as well as high capacities. What's more, it also features a 3K P/E cycle rating for long-lasting durability. The ISSS316's level of energy efficiency, reliability, safety, and performance meet the strict requirements of industrial applications. Other valuable features include LDPC ECC error correction and RAID Engine for data accuracy and integrity. The ISSS316 has high compatibility and is suitable for industrial PCs, embedded devices, automation, networking, and transportation applications.

Features

- 96-layer 3D TLC (BiCS4) NAND flash for higher capacities, efficiency, and durability
- 3K P/E cycle rating for excellent durability and reliability
- Low power consumption: 1.68W
- LDPC ECC (error correction) Technology
- Supports RAID Engine and SLC Cache
- Thermal Throttling automatically adjusts temperatures for prolonged product lifespan
- Suitable for industrial PCs, embedded devices, automation, networking, and transportation applications


Ordering Information

Operating Temp.	64GB	128GB	256GB	512GB	1TB
0°C to 70°C	ISSS316-064GCTB4	ISSS316-128GCTB4	ISSS316-256GCTB4	ISSS316-512GCTB4	ISSS316-001TCTB4

Specifications

Model	ISS316
Capacity	64GB – 1TB
Interface	SATA III
Flash Type	96L 3D TLC
Dimensions (L x W x H)	100 x 70 x 7mm
Sequential Read (Max.)	560MB/s
Sequential Write (Max.)	510MB/s
Operating Temperature	0°C to 70°C
Operating Voltage	5V
Power Consumption (Max.)	1.68W
Shock Resistance	1500G/0.5ms
Operating Humidity	5%-95 RH, non-condensing
Vibration Resistance	20G (20-2000Hz)
Technologies	LDPC ECC, RAID Engine, Wear Leveling, SLC Cache, TRIM and NCQ command, Thermal Throttling, S.M.A.R.T. Monitor

Diagram

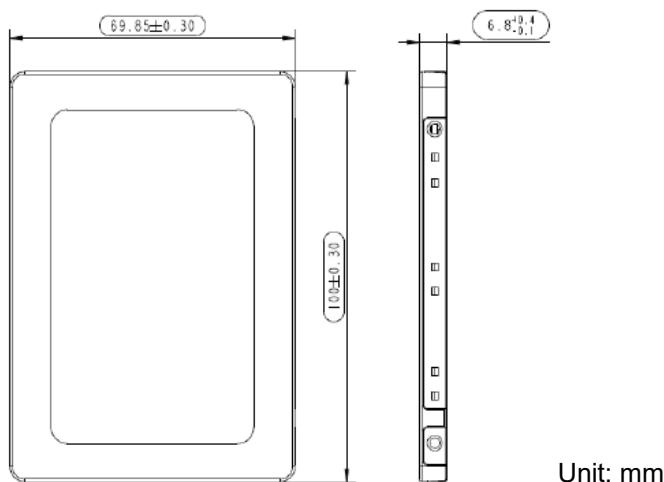

Contact Us

HQ (Taiwan):

T: +886-8228-0886

E: adata@adata.com

US:

T: +1-714-332-8708

E: IASales_us@adata.com

EU:

T: +49-899-0405-296

E: IASales_eu@adata.com

China

T: +86-21-6233-1010

E: IASales_cn@adata.com

JP:

T: +81-3-5807-0011

E: IASales_jp@adata.com

APAC/MEA:

E: IASales_apacmea@adata.com