

**Customer Part:**



**Description**

- The IQXT-260-27 employs an analogue ASIC for the oscillator and a high-order temperature compensation circuit in a 2.5 x 2.0mm size package.
- Model IQXT-260-27
- Model Issue number 1

**Frequency Parameters**

- Frequency 38.40MHz
- Frequency Tolerance ±1.00ppm
- Tolerance Condition @ 25°C ±2°C
- Frequency Stability ±0.50ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing ±1ppm max over 1yr @ 25°C
- Frequency Stability: TA varied over operating temperature range, measurement referenced to frequency observed with  $F_{ref} = (F_{max} + F_{min}) / 2$ ,  $V_s = 3.3V$  and load = 10kΩ//10pF.
- Supply Voltage Variation (±5% change @ 25°C): ±0.1ppm max
- Load Variation (±10% change @ 25°C): ±0.2ppm max
- Reflow Variation (after two consecutive reflows as per profile shown and 1hr recovery @ 25°C): ±1ppm max
- Note: Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents can lead to short term frequency drift.

**Electrical Parameters**


- Supply Voltage 3.3V ±5%
- Current Draw 2.000mA
- Supply Current (@ TA=25°C,  $V_s$  max and load=10kΩ//10pF): 2mA max

**Output Details**


- Output Compatibility Clipped Sine
- Drive Capability 10kΩ//10pF ±10%
- Output Voltage Level (@ TA=25°C,  $V_s$  min and load=10kΩ//10pF): 0.8V pk-pk min
- Start Up Time (amplitude within 90% of specified output level): 0.5ms max
- Start Up Time (frequency within ±0.5ppm of steady state frequency): 2ms max
- Output: DC coupled
- Note: AC-coupled output requires an external capacitor, ≥1nF recommended.

**Noise Parameters**

- Phase Noise (typ @ 25°C):
  - 60dBc/Hz @ 1Hz
  - 88dBc/Hz @ 10Hz
  - 109dBc/Hz @ 100Hz
  - 132dBc/Hz @ 1kHz
  - 149dBc/Hz @ 10kHz
  - 150dBc/Hz @ 100kHz

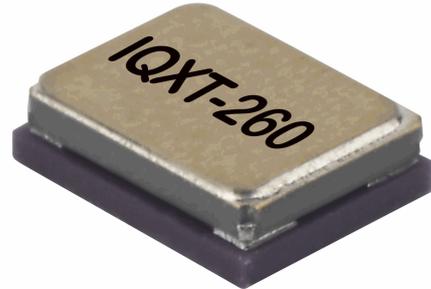


**Outline (mm)**

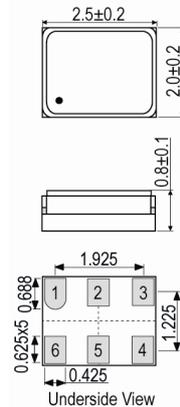


- Pad Connections**
1. NC / GND
  2. NC / GND
  3. GND
  4. Output
  5. NC / GND
  6. +Vs

**Solder Pad Layout**  
Note: recommend no tracks inc plains under device

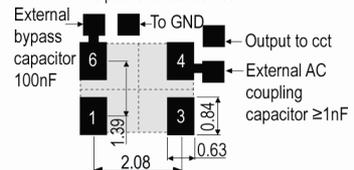

**Pb-Free Reflow**

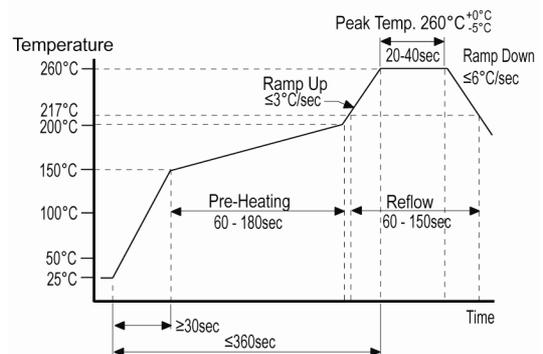

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Customer Part:****Environmental Parameters**

- Storage Temperature Range: -40 to 85°C
- Shock: MIL-STD-202 M213: Half sine wave acceleration of 3000G peak amplitude, duration 0.3ms, velocity 12.3ft/s.
- Vibration: JESD22-B103-B: 10G peak acceleration for 20mins, 12 cycles in each of the 3 orientations, tested from 10-2000Hz.
- Moisture Resistance: MIL-STD-202 M106g: 1000hrs @ 85°C, 85% RH, biased.
- Thermal Cycling: JESD22 Method JA-104C: 1000 temperature cycles, where each cycle consists of a 25mins soak time @ -40°C followed by a 25mins soak time @ 85°C, with a 60secs maximum transition time between temperatures, air to air transition.
- Note: Frequency shift  $\leq 1$ ppm after environmental conditions.

**Manufacturing Details**

- Maximum Process Temperature: 260°C (40secs max)
- RoHS Terminations
- RoHS Reflow Temp                      260°C max for 40secs max

**Compliance**

- RoHS Status (2015/863/EU)            Compliant
- REACH Status                              Compliant
- MSL Rating (JDEC-STD-033):        Not Applicable

**Packaging Details**

- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 3,000
- *Alternative packing option available*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)