





Tolerances: <10: ±0.3mm 10-100: ±0.5mm			Date	Name	MERPS11-15115
			09/11	dr	
			knitter-switch		30 24 39
Modifications	Date	Name			Page 1/2

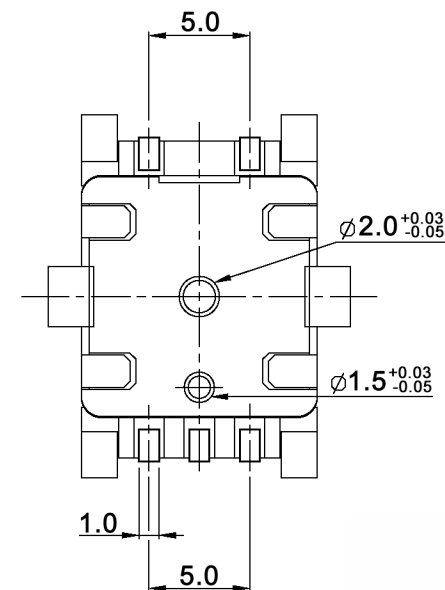


Specifications:

Contact rating:	10mA, 5V DC
Insulation resistance:	100MOhm min. at 250V DC
Dielectric strength:	300V AC for 1 minute
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Resolution:	15 pulses / 360° for each phase
Detent torque:	100 +/-70gf.cm
No. and pos. of detents:	30 detents; step angle: 12° +/-3°
Rotational life:	15 000 cycles
Switch:	Mechanical life: 20 000 cycles
	Operating force: 350 +/-100gf

Soldering conditions:

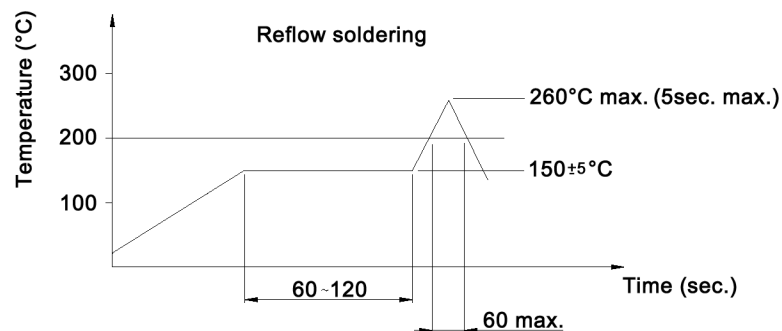

P.C.B. MOUNTING (TOLERANCE ±0.1) VIEWED FROM MOUNTING SIDE

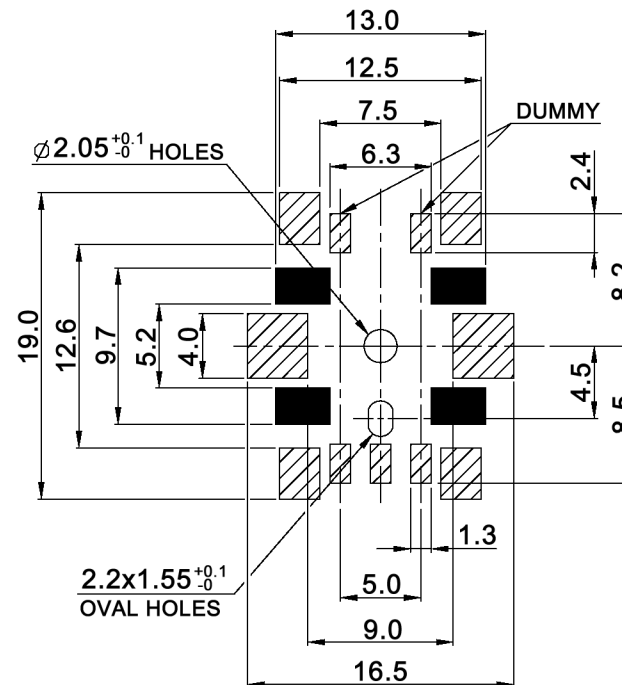

A SLANT LINE PART SHOWS THE SOLDER LAND.
BLACK PART: DO NOT SOLDER AND NO WIRING FOR ELECTRICAL CONTACT.



Tolerances: <10: ±0.3mm 10-100: ±0.5mm			Date	Name	MERPS11-15115	
			09/11	dr		
					knitter-switch	
					30 24 39	
Modifications	Date	Name				Page 2/2