

QT-Brightek PLCC Series

Dome Type PLCC2 LED

Part No.: QBLP670D-IW-NW

Product: QBLP670D-IW-NW	Date: August 26, 2021	Page 1 of 11
	Version# 1.2	

Table of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
CIE Chromaticity Diagram.....	5
Characteristic Curves.....	6
Solder Profile & Footprint.....	7
Recommended Handling Precautions.....	8
Packing	9
Labeling	10
Ordering Information	10
Revision History	11
Disclaimer	11

Introduction

Feature:

- Clear lens
- Ultra bright dome type PLCC2 LED
- InGaN technology
- Viewing angle: 30 deg typ.

Description:

This dome type PLCC2 LED has a height profile of 3.6mm. Combination of high brightness output and robust package, this LED is ideal for architecture lighting, status indication, and color mixing applications.

Application:


- Status indication
- Industrial equipment backlighting
- Architecture lighting

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant



Dimension:

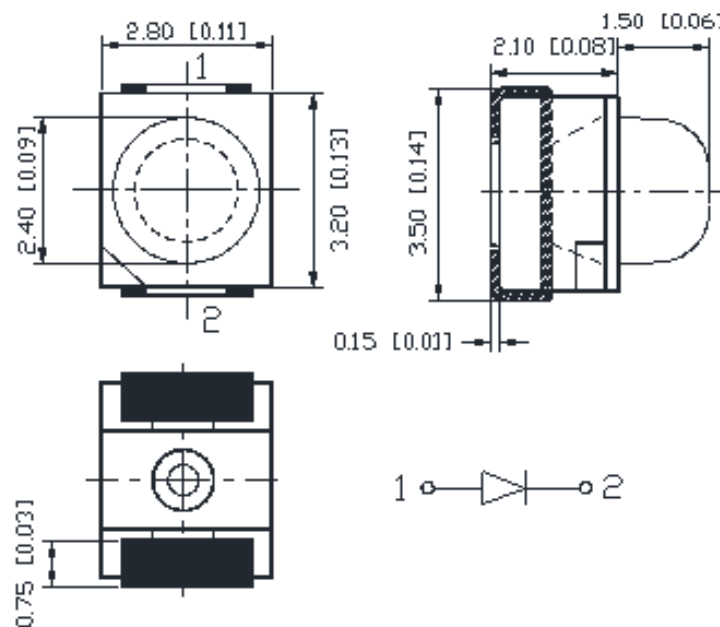

Units: mm / tolerance = +/-0.2mm

Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	IF (mA)	VF (V)		CIE Coordinates	Iv (mcd)	
			Typ.	Max.	Typ.	Min.	Typ.
QBLP670D-IW-NW	Natural White	20	3.1	3.7	X=0.3818, Y=0.3797	2500	6800
					CCT: 4000K		

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)
InGaN	111	30	125	5	-40 ~+80	-40 ~+85

*Duty 1/8 @ 1KHz


Forward Voltage V_F for InGaN @ I_F=20mA

Bin	Min.	Max.	Unit
f	2.8	3.1	V
g	3.1	3.4	
h	3.4	3.7	

Luminous Intensity I_V @ I_F=20mA

Bin	Min.	Max.	Unit
D	2500	3500	mcd
E	3500	5000	
F	5000	7000	
G	7000	10000	

CIE Chromaticity Diagram

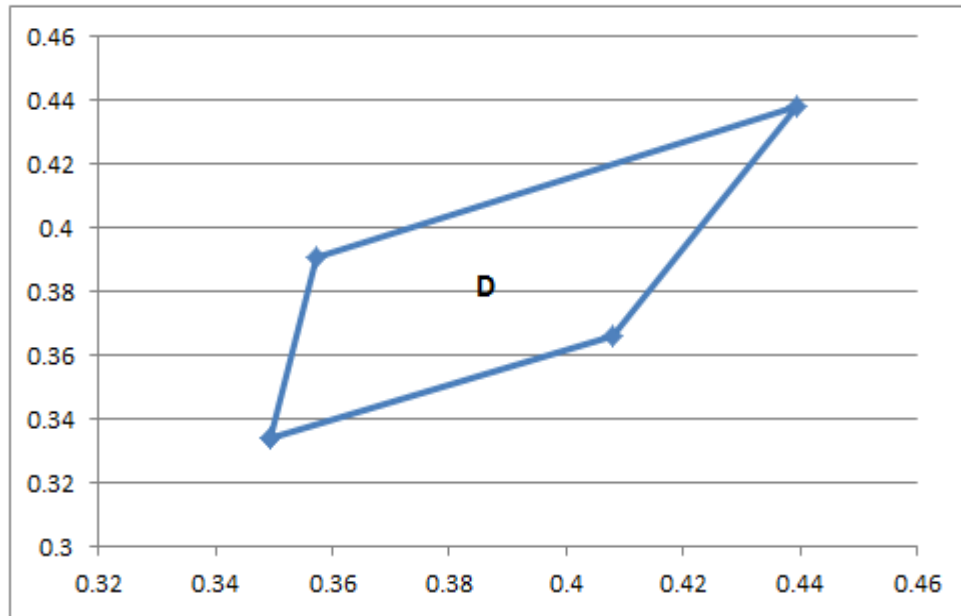


Chromaticity coordinates Ranks combination (IF=20mA)					
Rank	Chromaticity coordinates				
D	X	0.3495	0.3571	0.4393	0.4079
	Y	0.3339	0.3907	0.4381	0.3658


Characteristic Curves

InGaN


Forward Current vs. Forward Voltage

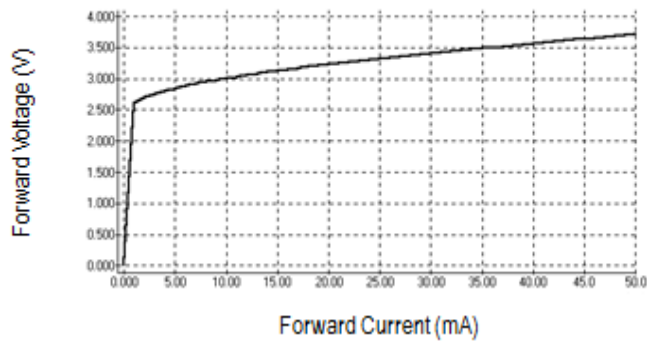


Relative Intensity vs. Wavelength

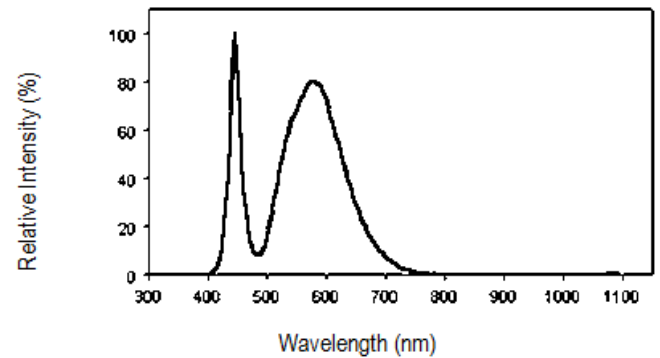


IF-Ta

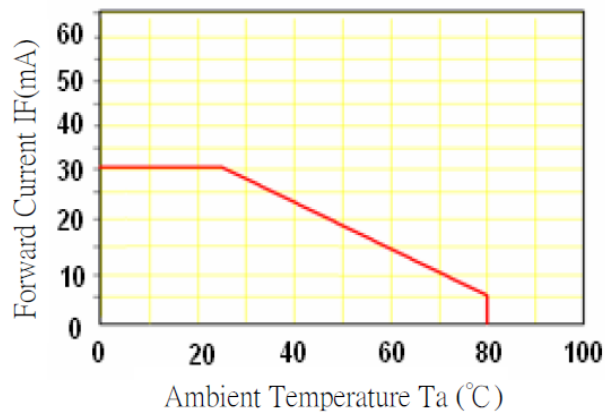


Directive Characteristics

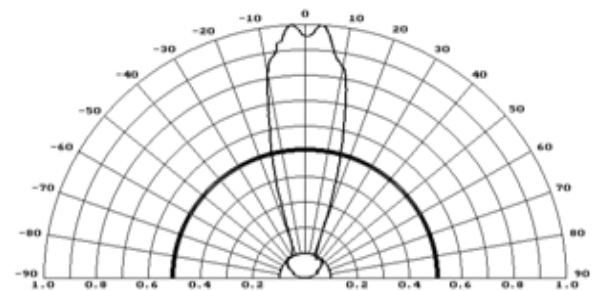

Solder Profile & Footprint

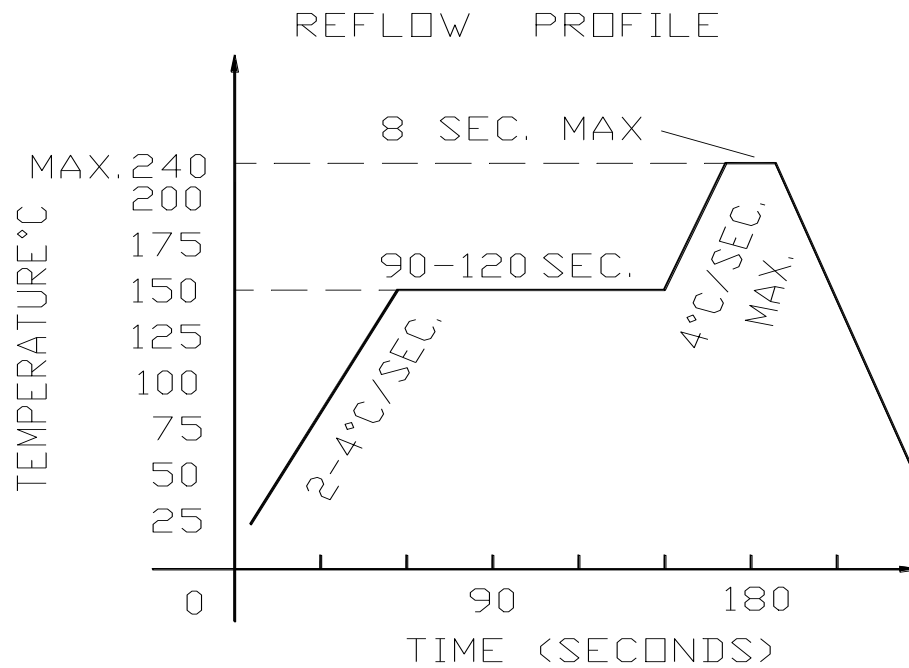

Recommended Pad Layout

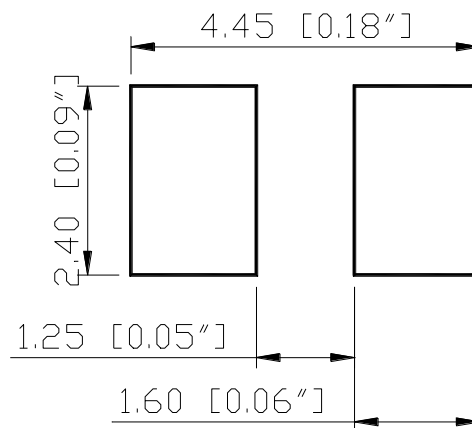

Units: mm

Tolerance: $\pm 0.2\text{mm}$


Recommended Handling Precautions

1. It is recommended to store the products in sealed and anti-static bags with desiccant inside at the following condition:
 - Humidity: <60% RH
 - Temperature: 5°C~30°C
2. Shelf life in sealed bag: 12 month at 5°C~30°C and < 60% R.H
3. After the package is opened:
 - 3.1 The products should be used within a week (168 hours)
 - 3.2 Or product should be stored at $\leq 20\%$ RH and (5°C~30°C) with zip-lock sealed bag
 - 3.3 It is recommended to bake before soldering when the package is unsealed after 72hrs;
 - 3.3.1 Baking condition (Tape and Reel Type): 60±3°C (24~36 hrs) and < 5% RH
 - 3.4 Products require baking before soldering/mounting if **3.1** or **3.2** is not met. Baking condition refers to **3.3.1**
4. If the product is not used within 3 months since manufacturing date, it is recommended to bake for 24 hrs @ 60°C before use.
5. If the product is not used after 3 months since manufacturing date, it is recommended to bake for 36~48 hrs @ 60°C before use.

Product: QBLP670D-IW-NW	Date: August 26, 2021	Page 8 of 11
	Version# 1.2	


Packing

Reel Dimension:

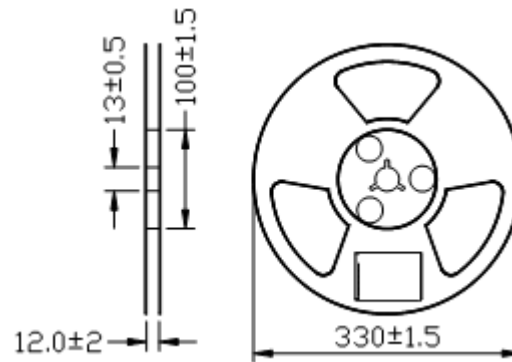


Unit: mm

Tape Dimension:

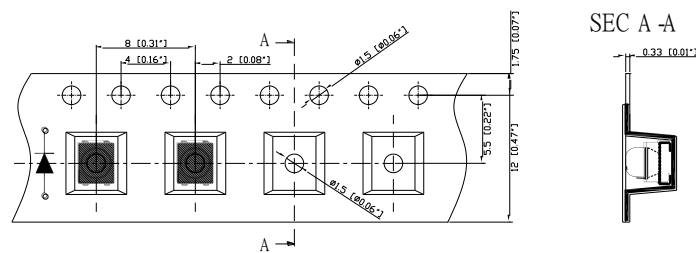


Unit: mm

Arrangement of Tape:

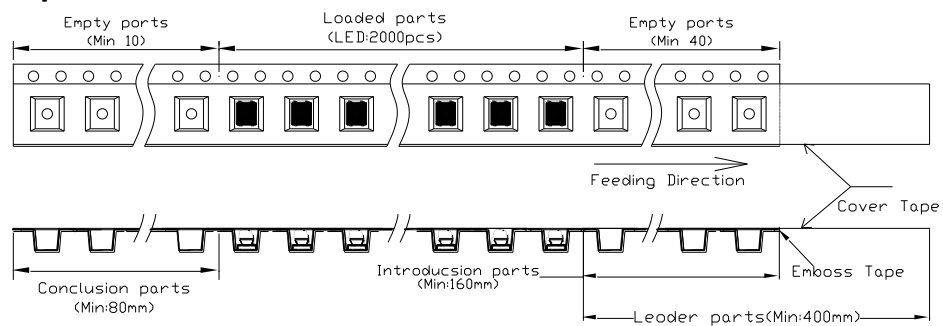

Packaging Specifications:

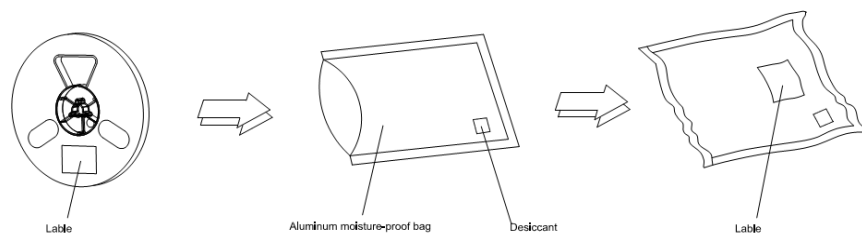

Labeling



Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____

Iv: _____

Wl: _____

Date: _____

Made in China

Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per Reel
QBLP670D-IW-NW	QBLP670D-IW-NW	Iv=6800mcd typ. @ If=20mA / CCT Coordinate: (0.3818, 0.3797) typ. / CCT: 4000K typ.	2,000 units

Revision History

Description:	Revision #	Revision Date
New Release of QBLP670D-IW-NW	V1.0	11/26/2014
Update logo and format	V1.1	04/06/2021
Update brightness	V1.2	08/26/2021

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.