

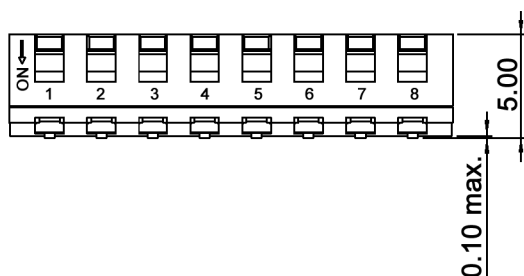


P.C.B. LAYOUT

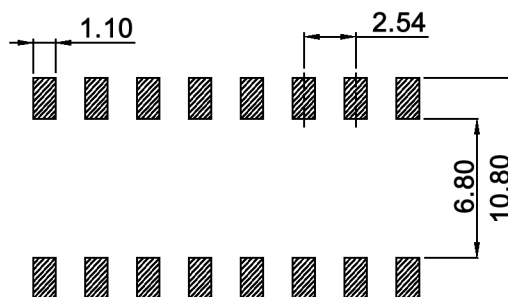

Prod. No.	No. of pos.	A	B
SBP 8002 T	2	6.48	2.54
SBP 8004 T	4	11.56	7.62
SBP 8006 T	6	16.64	12.70
SBP 8008 T	8	21.72	17.78
SBP 8010 T	10	26.80	22.86

Specifications:

Contact rating: 100mA, 50V DC  
switching: 25mA, 24V DC

Contact resistance: 100mOhm max.

Insulation resistance: 100MOhm min. at 500V DC for 1 minute +/-5sec.

Dielectric strength: 100V AC (50/60Hz) for 1 minute

Operating temperature: -40°C to +85°C


Storage temperature: -40°C to +85°C

Mechanical life: 2 000 cycles

Operating force: 800gf max.

Material: Actuator: high-temp. thermoplastic LCP, molded white  
Contact: copper, min. 0.075µm gold plated over min. 0.4µm nickel  
Base / cover: high-temp. thermoplastic nylon UL94V-0, molded black  
Terminal: brass, min. 0.025µm gold plated over min. 0.4µm nickel

Soldering conditions:

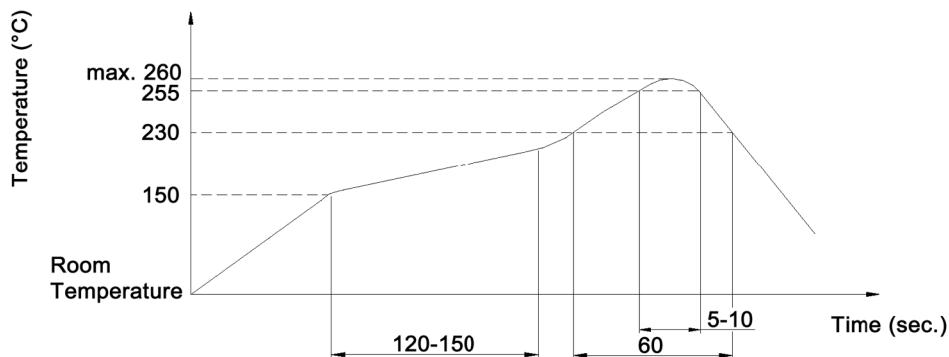

Tolerances: ±0.20mm	Date	Name
	04/09	dr
Operating temperature	06/10	dr
Modifications	Date	Name

**SBP 8000 T**


**30 17 84**

Page


1/2

**knitter-switch**

Packaging:

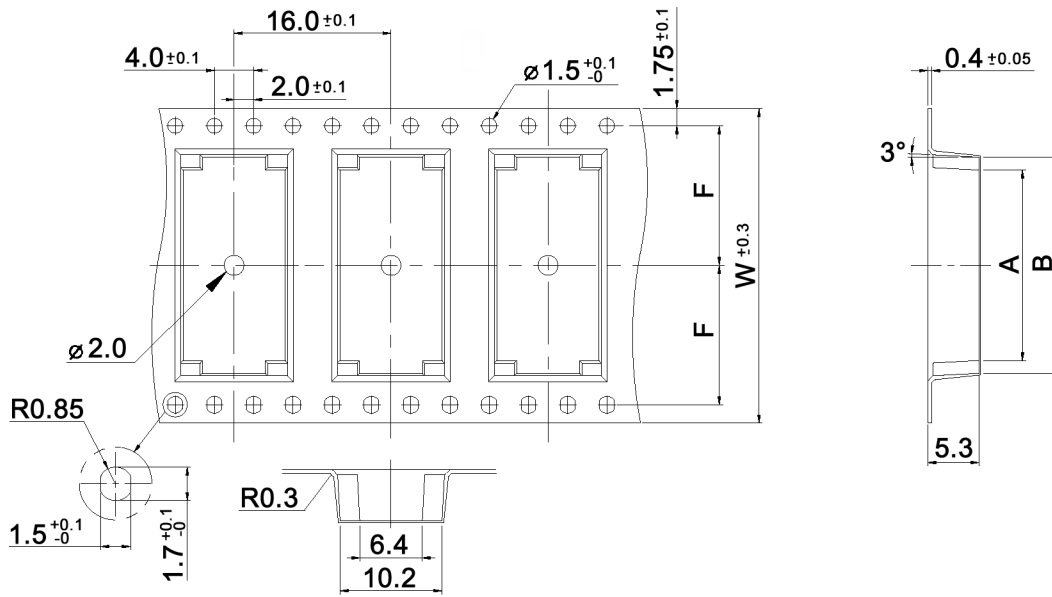

Part No.	A	B	W	F
SBP 8002 T	4.31	6.86	16.00	5.50
SBP 8004 T	9.39	11.94	24.00	7.50
SBP 8006 T	14.47	17.02	24.00	11.50
SBP 8008 T	19.55	22.10	32.00	14.20
SBP 8010 T	24.63	27.18	44.00	20.20

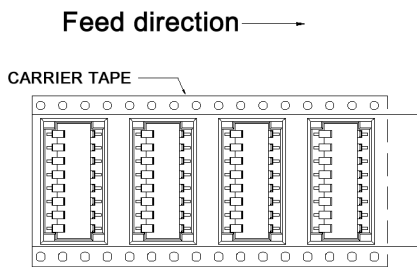

Packaging unit: 700 pcs. / reel



Tolerances: ±0.20mm	Date	Name	<h1>SBP 8000 T</h1>
	04/09	dr	
	<b>knitter-switch</b>		<h2>30 17 84</h2>
Modifications	Date	Name	Page 2/2