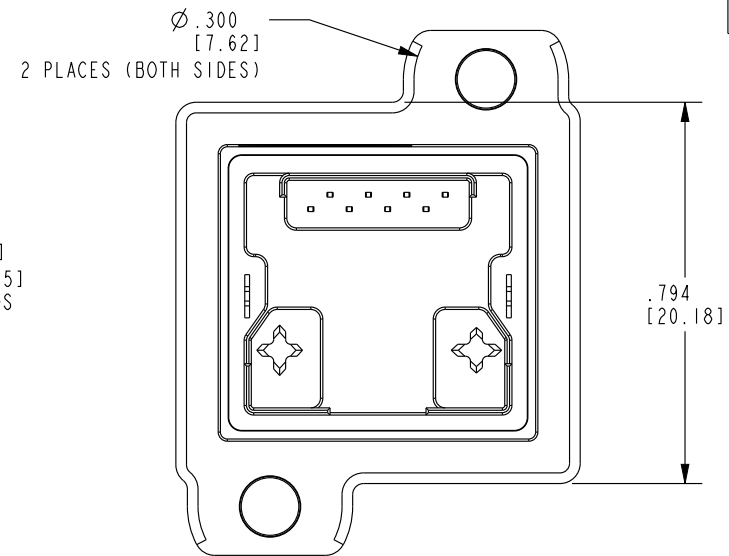


B

1. CONNECTOR MATERIALS:
HOUSING/INSERT: THERMOPLASTIC UL94 V-0
SHIELD: ZINC DIE-CAST ALLOY
SHIELD PLATING: TIN OVER COPPER
CONTACTS: COPPER ALLOY
CONTACT PLATING: SEE TABLE BELOW
GASKET: SILICONE RUBBER
SILICONE SEALING COMPOUND IN REAR OF JACK
EPOXY BETWEEN SHIELD AND HOUSING
2. PRODUCT INTENDED FOR CATEGORY 6 APPLICATIONS.
3. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
4. REFERENCE PRODUCT SPECIFICATION PR042-01.
5. ENVIRONMENTAL PERFORMANCE PER IEC 60529 CODE IP67, FOR CONNECTOR AND PANEL INTERFACE. REFER TO INSTRUCTION SHEET MN600001 FOR INSTALLATION GUIDELINES


PRODUCT MARKED WITH COMPANY LOGO, PART NUMBER, AND
MANUFACTURING DATE / LOCATION IN AREAS AS SHOWN.

A

RoHS



SHEET NO. 1 OF 2



DWG. NO.	CT600158	REV.	C0
----------	----------	------	----

