

2

2

В

А

DATE	REV.	ECN	APP'D BY
2-13-19	X 0	-	GWL
4-17-19	A 0	-	ADB
05-24-22	AI	11988	GWL
05-10-24	B 0	12366	KAW


I. CONNECTOR MATERIALS: HOUSING/INSERT: THERMOPLASTIC UL94 V-0 SHIELD: ZINC DIE-CAST ALLOY SHIELD PLATING: TIN OVER COPPER CONTACTS: COPPER ALLOY CONTACT PLATING: SEE TABLE BELOW GASKET: SILICONE RUBBER SILICONE SEALING COMPOUND IN REAR OF JACK EPOXY BETWEEN SHIELD AND HOUSING

- 2. PRODUCT INTENDED FOR CATEGORY 6 APPLICATIONS.
- 3. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
- 4. REFERENCE PRODUCT SPECIFICATION PR042-01.
- 5. ENVIRONMENTAL PERFORMANCE PER IEC 60529 CODE IP67, FOR CONNECTOR AND PANEL INTERFACE. REFER TO INSTRUCTION SHEET MN600001 FOR INSTALLATION GUIDELINES.
- <u>6</u> PRODUCT MARKED WITH COMPANY LOGO, PART NUMBER, AND MANUFACTURING DATE / LOCATION IN AREAS AS SHOWN.

M3 X 0.5	SS-60400-006			
#4-40 UNC	SS-60400-005			
THREAD TYPE	PART NUMBER			
Stewart connector a bel group	IIII8 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 ttp://www.stewartconnector.com			
ICAL CAT 6 SEALJACK, REAR PANEL THREADED MOUNTING				
ND THE SUBJECT MATTER SHOWN THEREON IAL AND THE PROPRIETARY PROPERTY OF ECTOR AND SHALL NOT BE REPRODUCED, D IN ANY MANNER WITHOUT PRIOR WRITTEN RT CONNECTOR. ONE OR MORE U.S. PATENTS THIS PRODUCT. FOR DETAILS, PLEASE BELFUSE.COM/STEWART/STEWART_PATENTS/	DRN BY: A D B DATE 2 - 3 - 9 APPD BY: G W L DATE 2 - 3 - 9 DWG. NO. C T 6 0 0 2 3 5 REV. B 0			

A

Ι

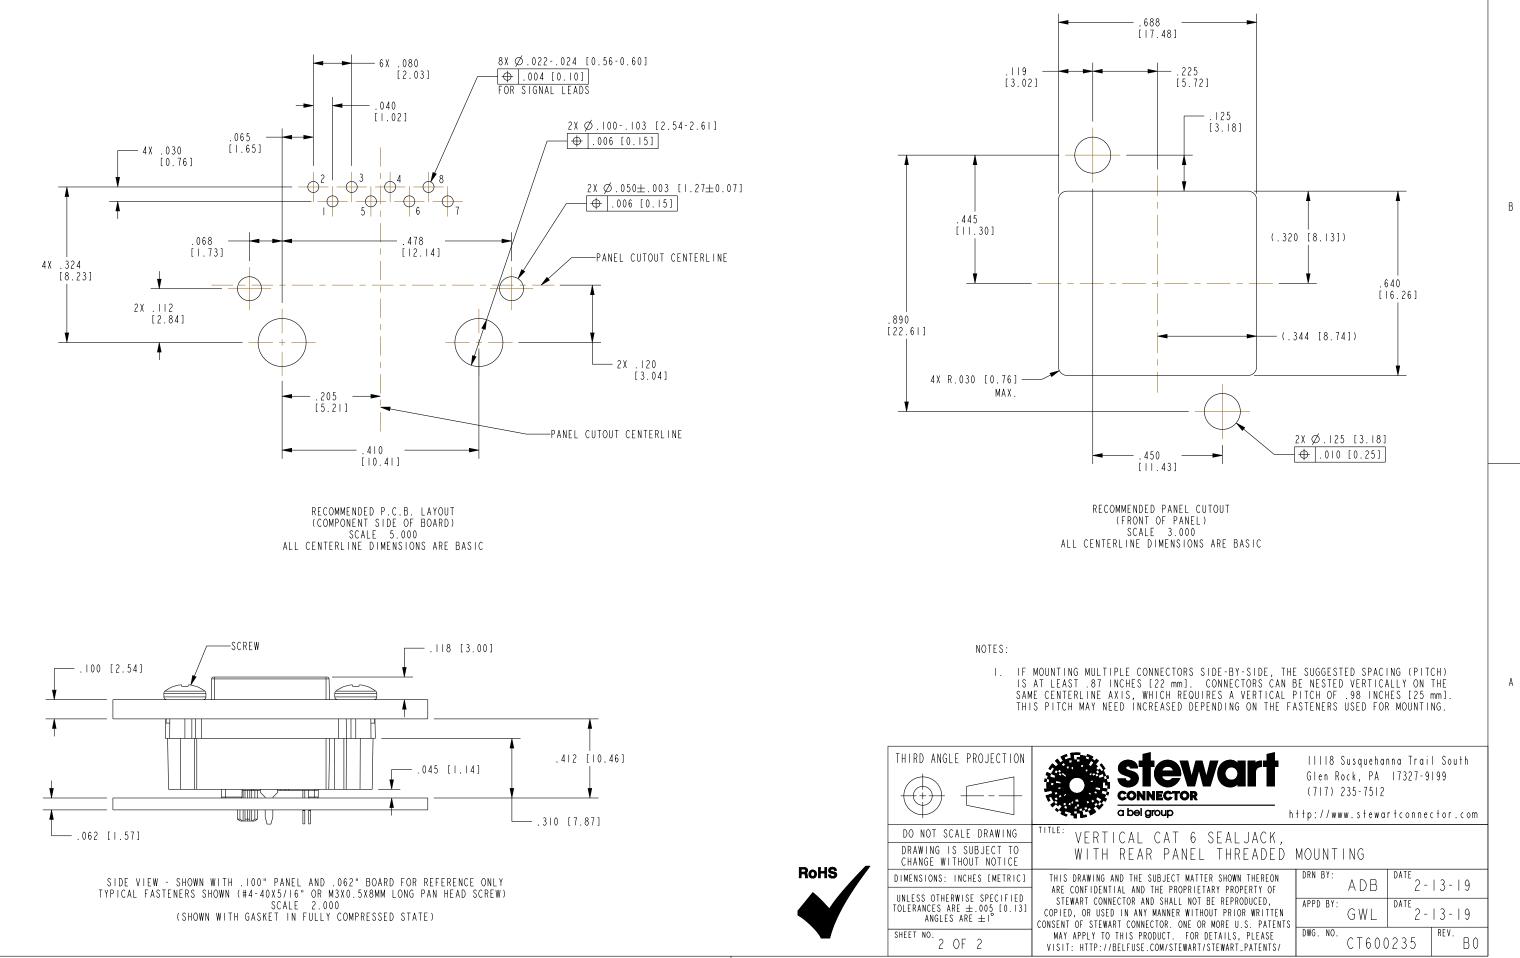

2

2

В

А

