
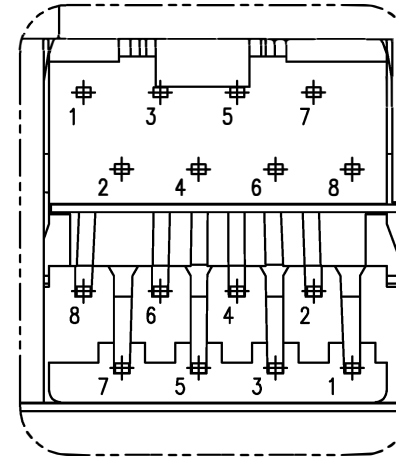
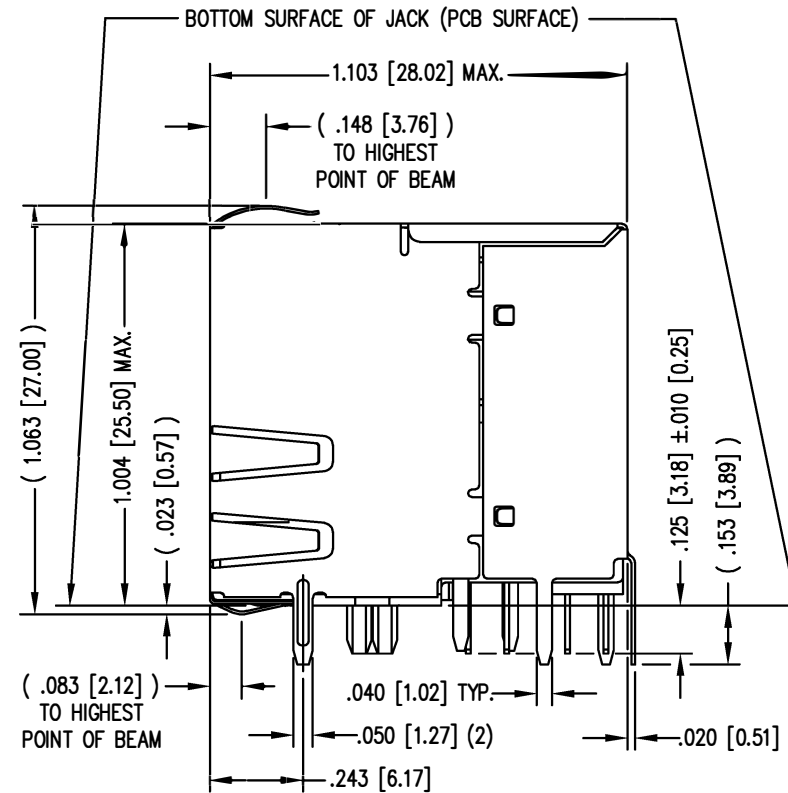
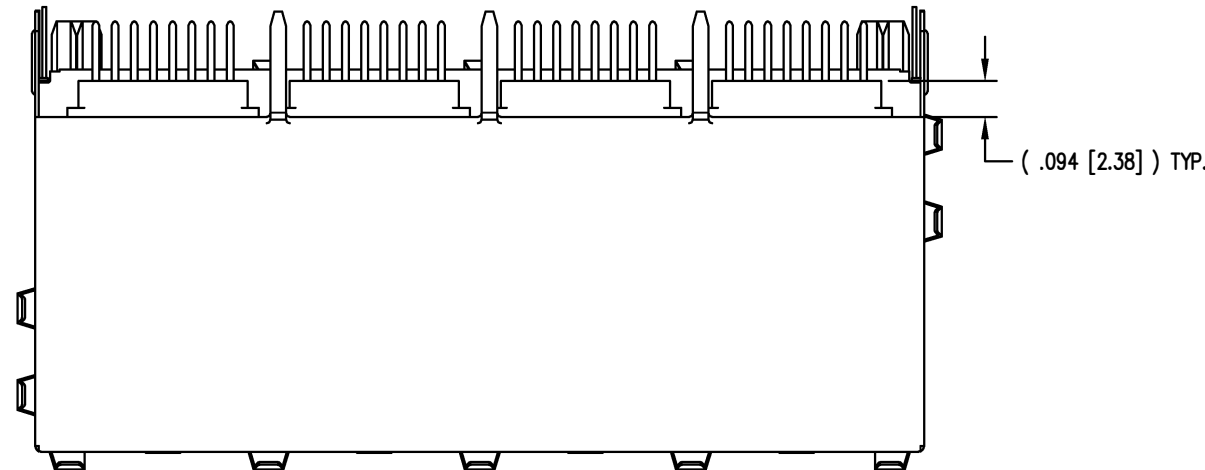
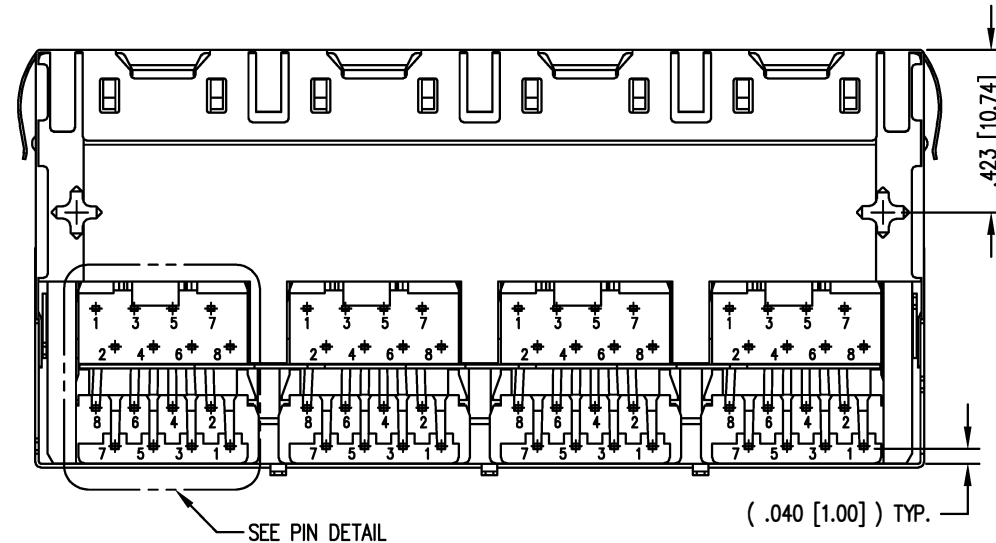


B

A

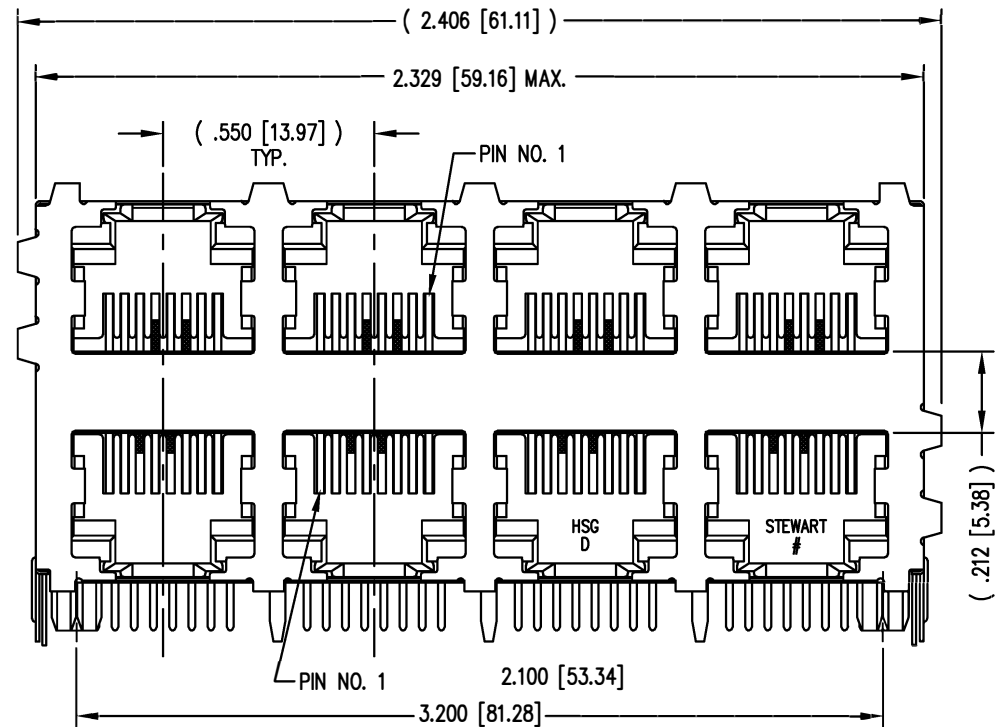

PIN DETAIL  
TYP. ALL PORTS

RoHS




1

NOTES:

- CONNECTOR MATERIALS:  
HOUSING: THERMOPLASTIC UL94 V-0  
CONTACTS/SHIELD: COPPER ALLOY  
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA  
SEE CHART FOR PART NUMBER  
SHIELD PLATING: NICKEL OR TIN
- FOR PRODUCT SPECIFICATION SEE PRO22-01.
- DIMENSIONS AND TOLERANCES COMPLY WITH FCC/CFR 47, PART 68.
- THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE USER THE ABILITY TO HAVE REASONABLE JACK/PANEL CLEARANCES, YET MAINTAIN GROUNDING CAPABILITY. THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES.
- DESIGNED FOR CATEGORY 5/5e APPLICATIONS.


50 MICRO-INCHES [1.27um]	PART NO. SS-73100-011
CONTACT PLATING IN MATING AREA	PART NUMBER



DO NOT SCALE DRAWING  
DRAWING IS SUBJECT TO  
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE ±.005 [0.13]  
ANGLES ARE ± 1°

SHEET NO. 1 OF 2



stewart  
CONNECTOR  
a bel group

11118 Susquehanna Trail South  
Glen Rock, PA 17327-9199  
(717) 235-7512  
<http://www.stewartconnector.com>

TITLE: HIGH PERFORMANCE SHIELDED STACK JACK  
8 CONTACTS / 8 POSITIONS, 8 PORTS (4 ON 4)

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON  
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF  
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,  
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN  
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS  
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE  
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART\\_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: SAR	DATE 09-27-02
APPD BY: RGC	DATE 09-27-02
DWG NO. CT730084	REV. C0

2

1

AutoCAD

B

A




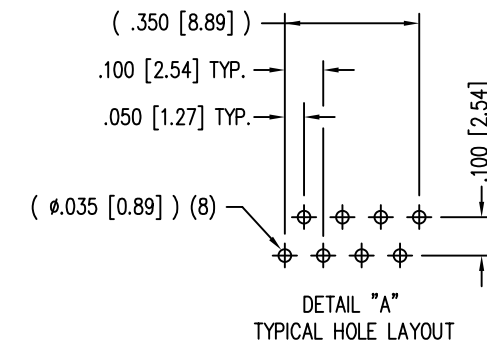


Diagram illustrating the suggested panel opening dimensions and tolerances:

- Horizontal dimension: 2.356 [59.84]
- Vertical dimension: 1.030 [26.16]
- Corner radius: (4) R.010 [0.25] MAX.
- Bottom edge detail: .015 [0.38] TOP OF PCB TO BOTTOM OF OPENING
- Overall label: SUGGESTED PANEL OPENING N.T.S.

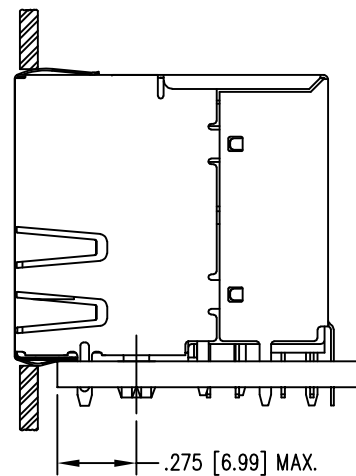

## RoHS

THIRD ANGLE PROJECTION				<div>stewart</div> <div>CONNECTOR</div> <div>a bel group</div>	11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512		http://www.stewartconnector.com
DO NOT SCALE DRAWING					TITLE: HIGH PERFORMANCE SHIELDED STACK JACK		
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		8 CONTACTS / 8 POSITIONS, 8 PORTS (4 ON 4)		DRN BY: SAR		DATE 09-27-02	
DIMENSIONS: INCHES [METRIC]		THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: <a href="http://BELFUSE.COM/STEWART/STEWART_PATENTS/">HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/</a>		APPD BY: RGC		DATE 09-27-02	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm .005$ [0.13] ANGLES ARE $\pm 1^\circ$				DWG NO. CT730084		REV. C0	
SHEET NO. 2 OF 2							