

# SZ1SMA Series

## Surface Mount > 400W



### Web Resources



Download ECAD models, order samples, and find technical resources at [www.littelfuse.com](http://www.littelfuse.com)

### Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
|        | E128662            |

### Maximum Ratings and Thermal Characteristics

| Parameter                                                                                                                                                   | Symbol                   | Value             | Unit               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------|--------------------|
| Peak Power Dissipation (Note 1) @ $T_L = 25^\circ\text{C}$ , Pulse Width = 1 ms                                                                             | $P_{PK}$                 | 400               | W                  |
| DC Power Dissipation @ $T_L = 75^\circ\text{C}$ Measured Zero Lead Length (Note 2) Derate Above $75^\circ\text{C}$ Thermal Resistance from Junction-to-Lead | $P_D$<br>$R_{\theta JL}$ | 2.0<br>20<br>50   | W<br>mW/°C<br>°C/W |
| DC Power Dissipation (Note 3) @ $T_A = 25^\circ\text{C}$ Derate Above $25^\circ\text{C}$ Thermal Resistance from Junction-to-Ambient                        | $P_D$<br>$R_{\theta JA}$ | 1.2<br>8.3<br>120 | W<br>mW/°C<br>°C/W |
| Forward Surge Current (Note 4) @ $T_A = 25^\circ\text{C}$ (for uni-directional)                                                                             | $I_{FSM}$                | 40                | A                  |
| Operating and Storage Temperature Range                                                                                                                     | $T_J$<br>$T_{stg}$       | -65 to +175       | °C                 |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 10 X 1000  $\mu\text{s}$ , non-repetitive.
- 1" square copper pad, FR-4 board.
- FR-4 board, using Littelfuse minimum recommended footprint
- 1/2 sine wave (or equivalent square wave), PW = 8.3 ms, duty cycle = 4 pulses per minute maximum. (for uni-directional)


### Description

The SZ1SMA series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. The SZ1SMA series is supplied in cost-effective, highly reliable DO-214AC package and it is ideal for use in automotive electronic applications.

### Features & Benefits

- Zener Transient Overvoltage Suppressors
- Working Peak Reverse Voltage Range -5V to 170V for uni-directional and 10 V to 78 V for bi-directional
- Standard Zener Breakdown Voltage Range -11.1 V to 95.83 V for bi-directional, 6.4 V to 209 V for uni-directional
- Peak Power - 400 W @ 1 ms
- ESD protection of data lines in accordance with IEC 61000-4-2 30kV(Air), 30kV (Contact)
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Response Time is Typically < 1 ns
- Flat Handling Surface for Accurate Placement
- Package Design for Top Slide or Bottom Circuit
- $V_{BR} @ T_J = V_{BR} @ 25^\circ\text{C} \times (1 + \alpha_T \times (T_J - 25))$  ( $\alpha_T$ : Temperature Coefficient)
- Board Mounting
- Low Profile Package
- Pb-free means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- Recognized to UL 497B as an Isolated Loop Circuit Protector
- RoHS-compliant and halogen-free


### Functional Diagram

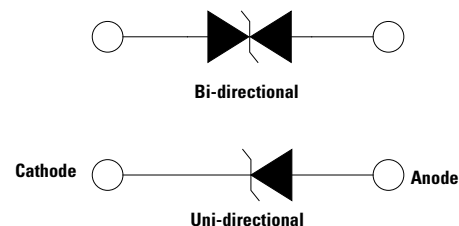

# SZ1SMA Series


Surface Mount > 400W

### I-V Curve Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted) – For Bi-directional

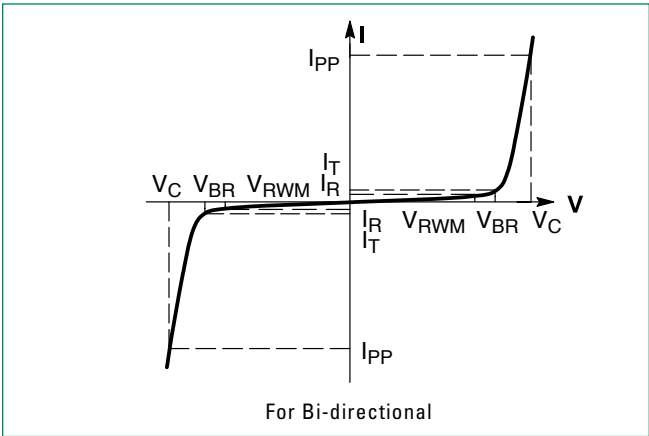

| Symbol    | Parameter                                   |
|-----------|---------------------------------------------|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | Test Current                                |

### I-V Curve Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 3.5\text{ V Max.}$ @ $I_F = 30\text{ A}$ for all types) (Note 5) – For Uni-directional

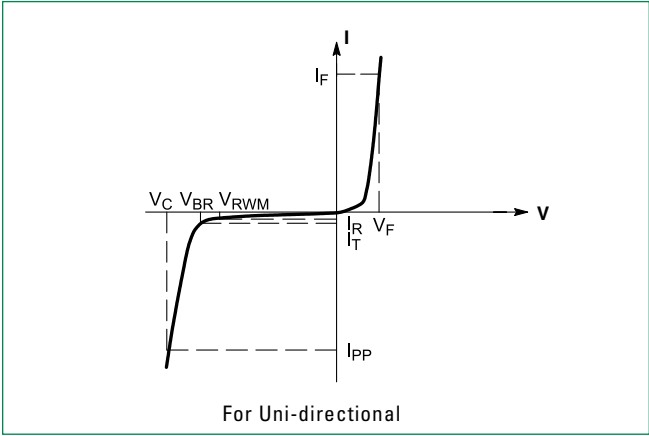

| Symbol    | Parameter                                   |
|-----------|---------------------------------------------|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | Test Current                                |
| $I_F$     | Forward Current                             |
| $V_F$     | Forward Voltage @ $I_F$                     |

5. 1/2 sine wave or equivalent, PW = 8.3 ms, non-repetitive duty cycle.

# SZ1SMA Series

## Surface Mount > 400W

### Electrical Characteristics – For Uni-directional

| Device        | Device Marking | V <sub>RWM</sub> <sup>Note 6</sup> | I <sub>R</sub> @ V <sub>RWM</sub> | Breakdown Voltage                                      |       |       |                  | V <sub>C</sub> @ I <sub>PP</sub> <sup>Note 8</sup> |                 | C Typ. <sup>Note 9</sup> | Agency Approval |
|---------------|----------------|------------------------------------|-----------------------------------|--------------------------------------------------------|-------|-------|------------------|----------------------------------------------------|-----------------|--------------------------|-----------------|
|               |                |                                    |                                   | V <sub>BR</sub> @ I <sub>T</sub> (V) <sup>Note 7</sup> |       |       | @ I <sub>T</sub> | V <sub>C</sub>                                     | I <sub>PP</sub> |                          |                 |
|               |                | Volts                              | µA                                | MIN                                                    | NOM   | MAX   | mA               | Volts                                              | Amps            | pF                       |                 |
| SZ1SMA5.0AT3G | QE             | 5.0                                | 400                               | 6.40                                                   | 6.70  | 7.00  | 10               | 9.2                                                | 43.5            | 2035                     | X               |
| SZ1SMA6.0AT3G | QG             | 6.0                                | 400                               | 6.67                                                   | 7.02  | 7.37  | 10               | 10.3                                               | 38.8            | 1730                     | X               |
| SZ1SMA6.5AT3G | QK             | 6.5                                | 250                               | 7.22                                                   | 7.60  | 7.98  | 10               | 11.2                                               | 35.7            | 1605                     | X               |
| SZ1SMA7.0AT3G | QM             | 7.0                                | 250                               | 7.78                                                   | 8.19  | 8.60  | 10               | 12.0                                               | 33.3            | 1500                     | -               |
| SZ1SMA7.5AT3G | QP             | 7.5                                | 100                               | 8.33                                                   | 8.77  | 9.21  | 1                | 12.9                                               | 31.0            | 1410                     | -               |
| SZ1SMA8.0AT3G | QR             | 8.0                                | 25                                | 8.89                                                   | 9.36  | 9.83  | 1                | 13.6                                               | 29.4            | 1035                     | X               |
| SZ1SMA8.5AT3G | QT             | 8.5                                | 5.0                               | 9.44                                                   | 9.92  | 10.40 | 1                | 14.4                                               | 27.8            | 1265                     | X               |
| SZ1SMA9.0AT3G | QV             | 9.0                                | 2.5                               | 10.00                                                  | 10.55 | 11.10 | 1                | 15.4                                               | 26.0            | 1200                     | X               |
| SZ1SMA10AT3G  | QX             | 10                                 | 2.5                               | 11.10                                                  | 11.70 | 12.30 | 1                | 17.0                                               | 23.5            | 1090                     | X               |
| SZ1SMA11AT3G  | QZ             | 11                                 | 2.5                               | 12.20                                                  | 12.85 | 13.50 | 1                | 18.2                                               | 22.0            | 1000                     | X               |
| SZ1SMA12AT3G  | RE             | 12                                 | 2.5                               | 13.30                                                  | 14.00 | 14.70 | 1                | 19.9                                               | 20.1            | 925                      | X               |
| SZ1SMA13AT3G  | RG             | 13                                 | 2.5                               | 14.40                                                  | 15.15 | 15.90 | 1                | 21.5                                               | 18.6            | 860                      | X               |
| SZ1SMA14AT3G  | RH             | 14                                 | 2.5                               | 15.60                                                  | 16.40 | 17.20 | 1                | 23.2                                               | 17.2            | 800                      | X               |
| SZ1SMA15AT3G  | RM             | 15                                 | 2.5                               | 16.70                                                  | 17.60 | 18.50 | 1                | 24.4                                               | 16.4            | 758                      | X               |
| SZ1SMA16AT3G  | RP             | 16                                 | 2.5                               | 17.80                                                  | 18.75 | 19.70 | 1                | 26.0                                               | 15.4            | 715                      | X               |
| SZ1SMA17AT3G  | RR             | 17                                 | 2.5                               | 18.90                                                  | 19.90 | 20.90 | 1                | 27.6                                               | 14.5            | 680                      | X               |
| SZ1SMA18AT3G  | RT             | 18                                 | 2.5                               | 20.00                                                  | 21.05 | 22.10 | 1                | 29.2                                               | 13.7            | 645                      | X               |
| SZ1SMA20AT3G  | RV             | 20                                 | 2.5                               | 22.20                                                  | 23.35 | 24.50 | 1                | 32.4                                               | 12.3            | 585                      | X               |
| SZ1SMA22AT3G  | RX             | 22                                 | 2.5                               | 24.40                                                  | 25.65 | 26.90 | 1                | 35.5                                               | 11.3            | 540                      | X               |
| SZ1SMA24AT3G  | RZ             | 24                                 | 2.5                               | 26.70                                                  | 28.10 | 29.50 | 1                | 38.9                                               | 10.3            | 500                      | X               |
| SZ1SMA26AT3G  | SE             | 26                                 | 2.5                               | 28.90                                                  | 30.40 | 31.90 | 1                | 42.1                                               | 9.5             | 460                      | X               |
| SZ1SMA28AT3G  | SG             | 28                                 | 2.5                               | 31.10                                                  | 32.75 | 34.40 | 1                | 45.4                                               | 8.8             | 430                      | X               |
| SZ1SMA30AT3G  | SK             | 30                                 | 1.0                               | 33.30                                                  | 35.05 | 36.80 | 1                | 48.4                                               | 8.3             | 405                      | X               |
| SZ1SMA33AT3G  | SM             | 33                                 | 2.5                               | 36.70                                                  | 38.65 | 40.60 | 1                | 53.3                                               | 7.5             | 375                      | X               |
| SZ1SMA36AT3G  | SP             | 36                                 | 2.5                               | 40.00                                                  | 42.10 | 44.20 | 1                | 58.1                                               | 6.9             | 345                      | X               |
| SZ1SMA40AT3G  | SR             | 40                                 | 2.5                               | 44.40                                                  | 46.75 | 49.10 | 1                | 64.5                                               | 6.2             | 315                      | X               |
| SZ1SMA43AT3G  | ST             | 43                                 | 2.5                               | 47.80                                                  | 50.30 | 52.80 | 1                | 69.4                                               | 5.8             | 295                      | X               |
| SZ1SMA45AT3G  | SV             | 45                                 | 2.5                               | 50.00                                                  | 52.65 | 55.30 | 1                | 72.2                                               | 5.5             | 280                      | X               |
| SZ1SMA48AT3G  | SX             | 48                                 | 2.5                               | 53.30                                                  | 56.10 | 58.90 | 1                | 77.4                                               | 5.2             | 265                      | X               |
| SZ1SMA51AT3G  | SZ             | 51                                 | 2.5                               | 56.70                                                  | 59.70 | 62.70 | 1                | 82.4                                               | 4.9             | 252                      | -               |
| SZ1SMA54AT3G  | TE             | 54                                 | 2.5                               | 60.00                                                  | 63.15 | 66.30 | 1                | 87.1                                               | 4.6             | 240                      | X               |
| SZ1SMA58AT3G  | TG             | 58                                 | 2.5                               | 64.40                                                  | 67.80 | 71.50 | 1                | 93.6                                               | 4.3             | 225                      | X               |
| SZ1SMA60AT3G  | TK             | 60                                 | 2.5                               | 66.70                                                  | 70.20 | 73.72 | 1                | 96.8                                               | 4.1             | 219                      | -               |
| SZ1SMA64AT3G  | TM             | 64                                 | 2.5                               | 71.10                                                  | 74.85 | 78.60 | 1                | 103.0                                              | 3.9             | 205                      | -               |
| SZ1SMA70AT3G  | TP             | 70                                 | 2.5                               | 77.80                                                  | 81.90 | 86.00 | 1                | 113.0                                              | 3.5             | 190                      | X               |
| SZ1SMA75AT3G  | TR             | 75                                 | 2.5                               | 83.3                                                   | 87.7  | 92.1  | 1                | 121.0                                              | 3.3             | 180                      | -               |
| SZ1SMA78AT3G  | TT             | 78                                 | 2.5                               | 86.7                                                   | 91.25 | 95.8  | 1                | 126.0                                              | 3.2             | 178                      | -               |
| SZ1SMA85AT3G  | TV             | 85                                 | 2.5                               | 94.4                                                   | 99.2  | 104   | 1                | 137.0                                              | 2.9             | 173                      | -               |
| SZ1SMA90AT3G  | TX             | 90                                 | 2.5                               | 100                                                    | 105.5 | 111   | 1                | 146.0                                              | 2.8             | 169                      | -               |
| SZ1SMA100AT3G | TZ             | 100                                | 2.5                               | 111                                                    | 117   | 123   | 1                | 162.0                                              | 2.5             | 162                      | -               |
| SZ1SMA110AT3G | VE             | 110                                | 2.5                               | 122                                                    | 128.5 | 135   | 1                | 177.0                                              | 2.3             | 155                      | -               |
| SZ1SMA120AT3G | VG             | 120                                | 2.5                               | 133                                                    | 140   | 147   | 1                | 193.0                                              | 2.1             | 148                      | -               |
| SZ1SMA130AT3G | VK             | 130                                | 2.5                               | 144                                                    | 151.5 | 159   | 1                | 209.0                                              | 1.9             | 142                      | -               |
| SZ1SMA150AT3G | VM             | 150                                | 2.5                               | 167                                                    | 176   | 185   | 1                | 243.0                                              | 1.7             | 127                      | -               |
| SZ1SMA160AT3G | VP             | 160                                | 2.5                               | 178                                                    | 187.5 | 197   | 1                | 259.0                                              | 1.6             | 119                      | -               |
| SZ1SMA170AT3G | VR             | 170                                | 2.5                               | 189                                                    | 199   | 209   | 1                | 275.0                                              | 1.5             | 112                      | -               |

# SZ1SMA Series

## Surface Mount > 400W

### Electrical Characteristics - For Bi-directional

| Device        | Device Marking | V <sub>RWM</sub> <sup>Note 6</sup> | I <sub>R</sub> @<br>V <sub>RWM</sub> | Breakdown Voltage                                      |       |       |                  | V <sub>C</sub> @ I <sub>PP</sub> <sup>Note 8</sup> |                 | Agency Approval                                                                     |
|---------------|----------------|------------------------------------|--------------------------------------|--------------------------------------------------------|-------|-------|------------------|----------------------------------------------------|-----------------|-------------------------------------------------------------------------------------|
|               |                |                                    |                                      | V <sub>BR</sub> @ I <sub>T</sub> (V) <sup>Note 7</sup> |       |       | @ I <sub>T</sub> | V <sub>C</sub>                                     | I <sub>PP</sub> |                                                                                     |
|               |                |                                    |                                      | MIN                                                    | NOM   | MAX   |                  |                                                    |                 |                                                                                     |
|               |                | Volts                              | μA                                   |                                                        |       |       | mA               | Volts                                              | Amps            |  |
| SZ1SMA10CAT3G | QXC            | 10                                 | 2.5                                  | 11.10                                                  | 11.69 | 12.27 | 1                | 17.0                                               | 23.5            | X                                                                                   |
| SZ1SMA11CAT3G | QZC            | 11                                 | 2.5                                  | 12.20                                                  | 12.85 | 13.50 | 1                | 18.2                                               | 22.0            | -                                                                                   |
| SZ1SMA12CAT3G | REC            | 12                                 | 2.5                                  | 13.30                                                  | 14.00 | 14.70 | 1                | 19.9                                               | 20.1            | X                                                                                   |
| SZ1SMA13CAT3G | RGC            | 13                                 | 2.5                                  | 14.40                                                  | 15.16 | 15.92 | 1                | 21.5                                               | 18.6            | X                                                                                   |
| SZ1SMA14CAT3G | RHC            | 14                                 | 2.5                                  | 15.60                                                  | 16.40 | 17.20 | 1                | 23.2                                               | 17.2            | -                                                                                   |
| SZ1SMA15CAT3G | RMC            | 15                                 | 2.5                                  | 16.70                                                  | 17.58 | 18.46 | 1                | 24.4                                               | 16.4            | X                                                                                   |
| SZ1SMA16CAT3G | RPC            | 16                                 | 2.5                                  | 17.80                                                  | 18.74 | 19.67 | 1                | 26.0                                               | 15.4            | X                                                                                   |
| SZ1SMA17CAT3G | RRC            | 17                                 | 2.5                                  | 18.90                                                  | 19.90 | 20.90 | 1                | 27.6                                               | 14.5            | -                                                                                   |
| SZ1SMA18CAT3G | RTC            | 18                                 | 2.5                                  | 20.00                                                  | 21.06 | 22.11 | 1                | 29.2                                               | 13.7            | X                                                                                   |
| SZ1SMA20CAT3G | RVC            | 20                                 | 2.5                                  | 22.20                                                  | 23.37 | 24.54 | 1                | 32.4                                               | 12.3            | X                                                                                   |
| SZ1SMA22CAT3G | RXC            | 22                                 | 2.5                                  | 24.4                                                   | 25.65 | 26.90 | 1                | 35.5                                               | 11.3            | -                                                                                   |
| SZ1SMA24CAT3G | RZC            | 24                                 | 2.5                                  | 26.70                                                  | 28.11 | 29.51 | 1                | 38.9                                               | 10.3            | X                                                                                   |
| SZ1SMA26CAT3G | SEC            | 26                                 | 2.5                                  | 28.90                                                  | 30.42 | 31.94 | 1                | 42.1                                               | 9.5             | X                                                                                   |
| SZ1SMA28CAT3G | SGC            | 28                                 | 2.5                                  | 31.10                                                  | 32.74 | 34.37 | 1                | 45.4                                               | 8.8             | X                                                                                   |
| SZ1SMA30CAT3G | SKC            | 30                                 | 2.5                                  | 33.30                                                  | 35.06 | 36.81 | 1                | 48.4                                               | 8.3             | X                                                                                   |
| SZ1SMA33CAT3G | SMC            | 33                                 | 2.5                                  | 36.70                                                  | 38.63 | 40.56 | 1                | 53.3                                               | 7.5             | X                                                                                   |
| SZ1SMA36CAT3G | SPC            | 36                                 | 2.5                                  | 40.00                                                  | 42.11 | 44.21 | 1                | 58.1                                               | 6.9             | X                                                                                   |
| SZ1SMA40CAT3G | SRC            | 40                                 | 2.5                                  | 44.40                                                  | 46.74 | 49.07 | 1                | 64.5                                               | 6.2             | X                                                                                   |
| SZ1SMA43CAT3G | STC            | 43                                 | 2.5                                  | 47.80                                                  | 50.30 | 52.80 | 1                | 69.4                                               | 5.8             | -                                                                                   |
| SZ1SMA45CAT3G | SVC            | 45                                 | 2.5                                  | 50.00                                                  | 52.65 | 55.30 | 1                | 72.2                                               | 5.5             | -                                                                                   |
| SZ1SMA48CAT3G | SXC            | 48                                 | 2.5                                  | 53.30                                                  | 56.11 | 58.91 | 1                | 77.4                                               | 5.2             | X                                                                                   |
| SZ1SMA51CAT3G | SZC            | 51                                 | 2.5                                  | 56.70                                                  | 59.70 | 62.70 | 1                | 82.4                                               | 4.9             | -                                                                                   |
| SZ1SMA54CAT3G | TEC            | 54                                 | 2.5                                  | 60.00                                                  | 63.15 | 66.30 | 1                | 87.1                                               | 4.6             | -                                                                                   |
| SZ1SMA58CAT3G | TGC            | 58                                 | 2.5                                  | 64.40                                                  | 67.79 | 71.18 | 1                | 93.6                                               | 4.3             | X                                                                                   |
| SZ1SMA60CAT3G | TKC            | 60                                 | 2.5                                  | 66.70                                                  | 70.21 | 73.72 | 1                | 96.8                                               | 4.1             | X                                                                                   |
| SZ1SMA64CAT3G | TMC            | 64                                 | 2.5                                  | 71.10                                                  | 74.85 | 78.60 | 1                | 103.0                                              | 3.9             | -                                                                                   |
| SZ1SMA70CAT3G | TPC            | 70                                 | 2.5                                  | 77.80                                                  | 81.90 | 85.99 | 1                | 113.0                                              | 3.5             | X                                                                                   |
| SZ1SMA75CAT3G | TRC            | 75                                 | 2.5                                  | 83.30                                                  | 87.70 | 92.10 | 1                | 121.0                                              | 3.3             | -                                                                                   |
| SZ1SMA78CAT3G | TTC            | 78                                 | 2.5                                  | 86.70                                                  | 91.27 | 95.83 | 1                | 126.0                                              | 3.2             | X                                                                                   |

6. A transient suppressor is normally selected according to the working peak reverse voltage ( $V_{RWM}$ ), which should be equal to or greater than the DC or continuous peak operating voltage level

7.  $V_{BR}$  measured at pulse test current  $I_T$  at an ambient temperature of 25°C

8. Surge current waveform per Figure 2 and derate per Figure 3

9. Bias voltage = 0 V, F = 1.0 MHz,  $T_J$  = 25°C.

# SZ1SMA Series

## Surface Mount > 400W

### Ratings and Characteristic Curves

Figure 1. Pulse Rating Curve

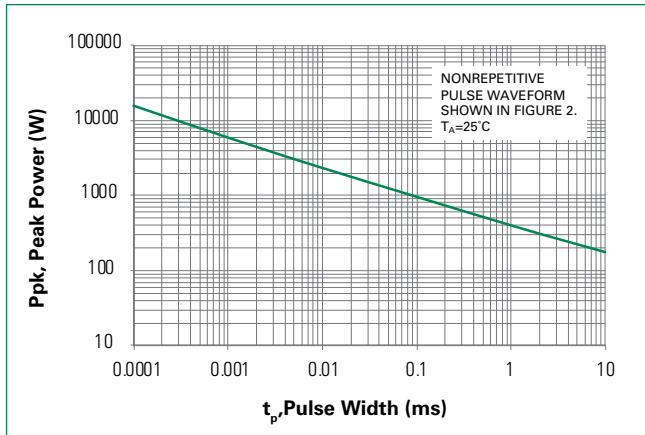


Figure 2. Pulse Waveform

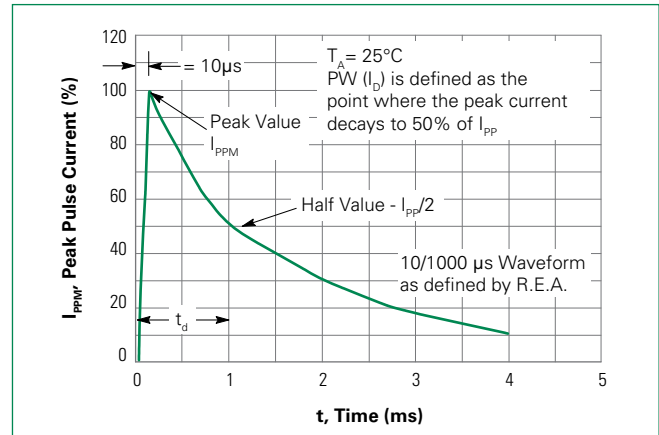


Figure 3 - Surge Derating Curve

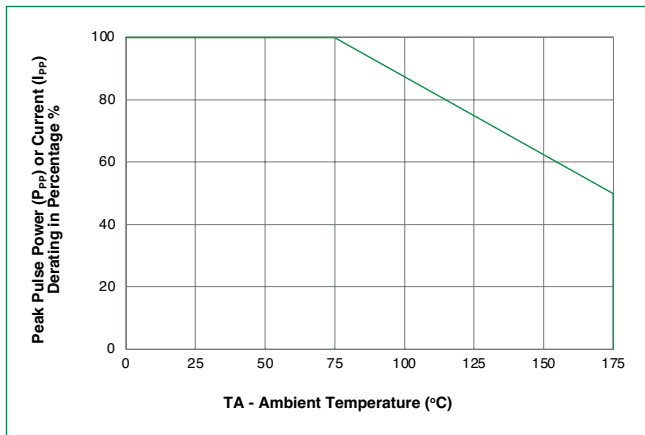


Figure 4. Typical Junction Capacitance vs. Bias Voltage

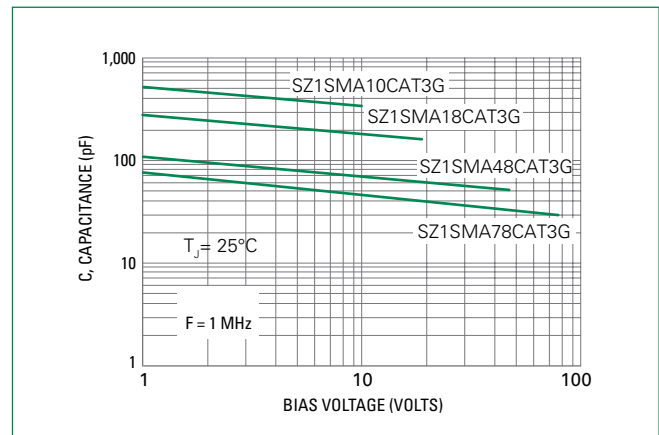


Figure 5. Typical Junction Capacitance vs. Bias Voltage


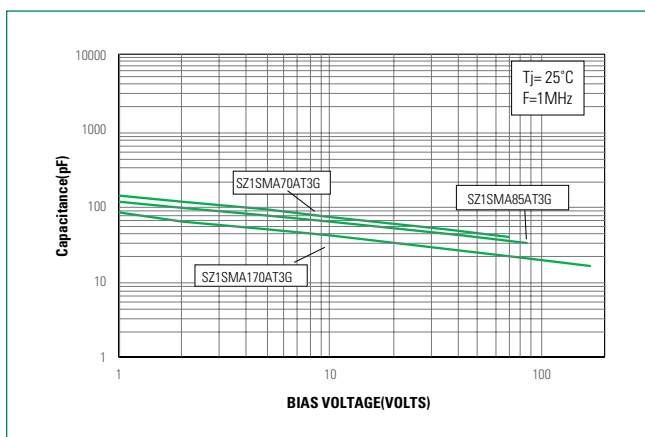


Figure 6. Steady State Power Derating

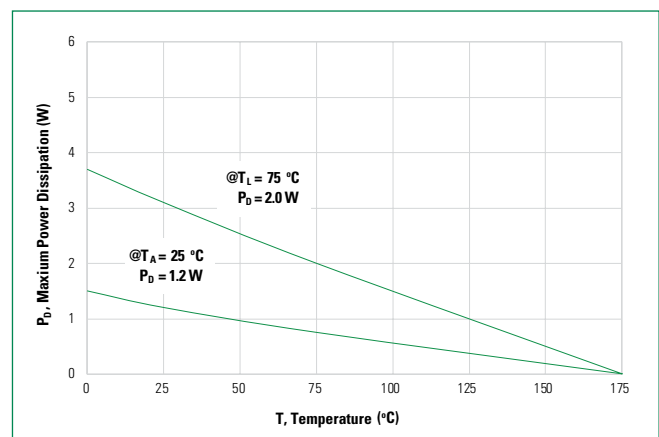


# SZ1SMA Series

## Surface Mount > 400W

### Soldering Parameters

|                                                                       |                                    |                         |
|-----------------------------------------------------------------------|------------------------------------|-------------------------|
| <b>Reflow Condition</b>                                               |                                    | Lead-free assembly      |
| <b>Pre Heat</b>                                                       | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                                       | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                                       | - Time (min to max) ( $t_s$ )      | 60 – 120 secs           |
| <b>Average ramp up rate (Liquidus Temp (<math>T_L</math>) to peak</b> |                                    | 3°C/second max          |
| <b><math>T_{s(max)}</math> to <math>T_L</math> - Ramp-up Rate</b>     |                                    | 3°C/second max          |
| <b>Reflow</b>                                                         | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                                       | - Time (min to max) ( $t_L$ )      | 60 – 150 seconds        |
| <b>Peak Temperature (<math>T_p</math>)</b>                            |                                    | 260 <sup>+0/-5</sup> °C |
| <b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>  |                                    | 30 seconds max          |
| <b>Ramp-down Rate</b>                                                 |                                    | 6°C/second max          |
| <b>Time 25°C to peak Temperature (<math>T_p</math>)</b>               |                                    | 8 minutes max.          |
| <b>Do not exceed</b>                                                  |                                    | 260°C                   |

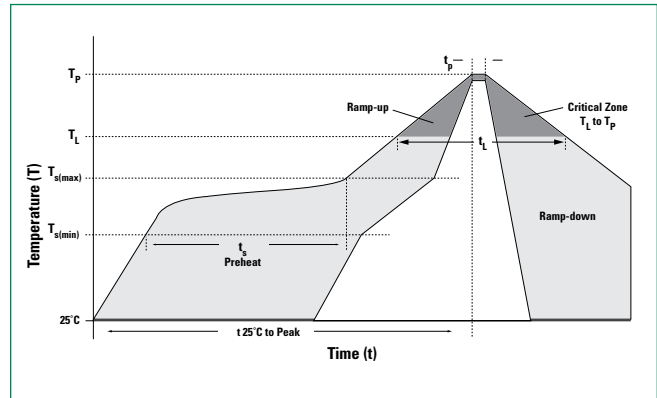


### Physical Specifications

|                 |                                                                                       |
|-----------------|---------------------------------------------------------------------------------------|
| <b>Weight</b>   | 0.00246 ounce, 0.0767 grams                                                           |
| <b>Case</b>     | JEDEC DO214AC. Void-Free, Transfer-Molded, Thermosetting Plastic Epoxy Meets UL 94V-0 |
| <b>Polarity</b> | Color band denotes cathode for unidirectional components.                             |
| <b>Terminal</b> | Matte Tin-plated leads, Solderable per JESD22-B102                                    |


### Environmental Specifications

|                            |                          |
|----------------------------|--------------------------|
| <b>High Temp. Storage</b>  | JESD22-A103              |
| <b>HTRB</b>                | JESD22-A108              |
| <b>Temperature Cycling</b> | JESD22-A104              |
| <b>MSL</b>                 | JEDEC-J-STD-020, Level 1 |
| <b>H3TRB</b>               | JESD22-A101              |
| <b>RSH</b>                 | JESD22-A111              |

### Soldering Footprint

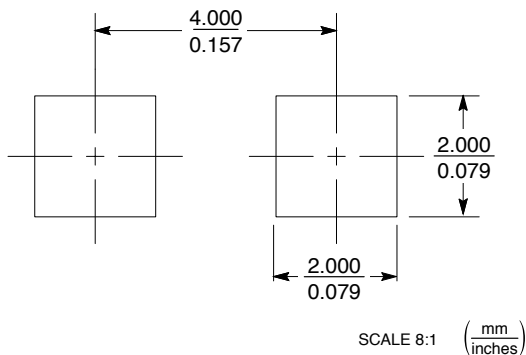

### Dimensions

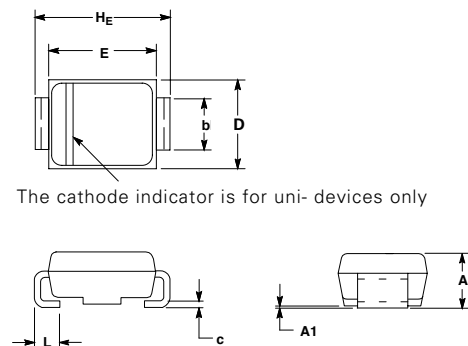

### Ordering Information

| Device**      | Package       | Shipping           |
|---------------|---------------|--------------------|
| SZ1SMAxxAT3G  | SMA (Pb-Free) | 5,000 /Tape & Reel |
| SZ1SMAxxCAT3G | SMA (Pb-Free) | 5,000 /Tape & Reel |


\*\*The "T3" suffix refers to a 13 inch reel

| Dim                  | Inches |       |       | Millimeters |      |      |
|----------------------|--------|-------|-------|-------------|------|------|
|                      | Min    | Nom   | Max   | Min         | Nom  | Max  |
| <b>A</b>             | 0.078  | 0.083 | 0.087 | 1.97        | 2.10 | 2.20 |
| <b>A1</b>            | 0.002  | 0.004 | 0.008 | 0.05        | 0.10 | 0.20 |
| <b>b</b>             | 0.050  | 0.057 | 0.064 | 1.27        | 1.45 | 1.63 |
| <b>c</b>             | 0.006  | 0.011 | 0.016 | 0.15        | 0.28 | 0.41 |
| <b>D</b>             | 0.090  | 0.103 | 0.115 | 2.29        | 2.60 | 2.92 |
| <b>E</b>             | 0.160  | 0.170 | 0.180 | 4.06        | 4.32 | 4.57 |
| <b>H<sub>E</sub></b> | 0.190  | 0.205 | 0.220 | 4.83        | 5.21 | 5.59 |
| <b>L</b>             | 0.030  | 0.045 | 0.060 | 0.76        | 1.14 | 1.52 |

# SZ1SMA Series


## Surface Mount > 400W

### Part Marking System




XXXX = Device Code (max four digits)  
 Y = Year  
 M = Month  
 A = Assembly Location  
 WW = Lot Code

### Part Numbering System

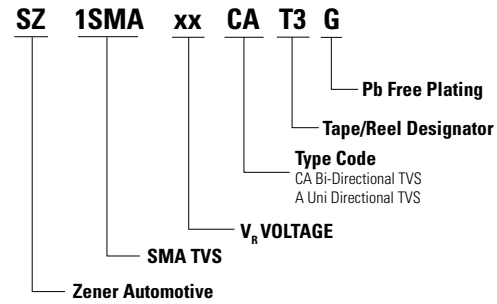

### Tape and Reel Specification

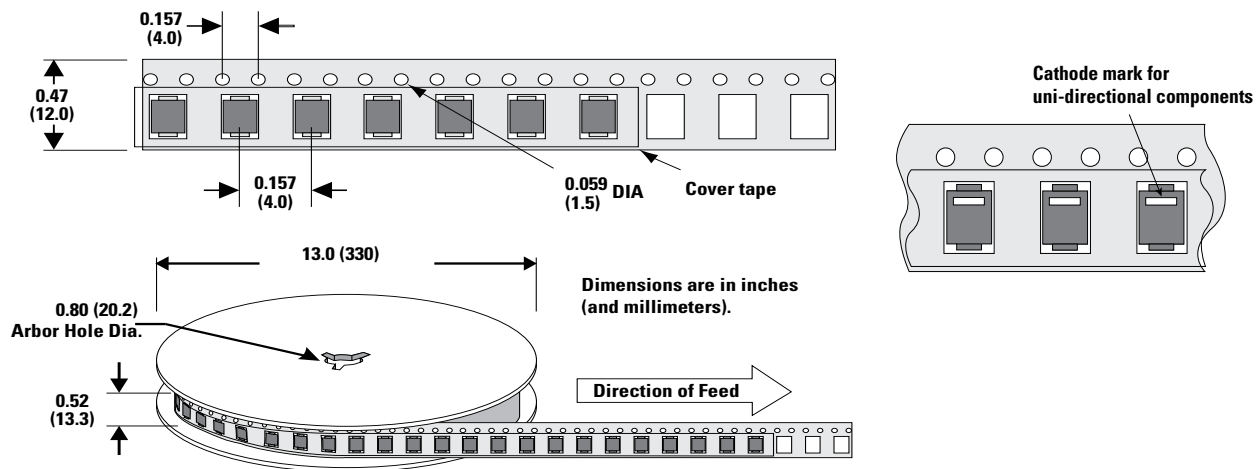

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).