


## Features

- Latch-Up Performance Exceeds 600 mA Per JESD 78, Class II
- Supply Voltage: 1.65V to 5.5V
- Low ON-State Resistance: typical 4Ω at  $V_s = 4.5V$
- Bandwidth: 250 MHz
- Fast switching times:  $t_{ON} = 85\text{ ns}$ ,  $t_{OFF} = 85\text{ ns}$
- Break-Before-Make Switching
- Operation Temperature Range:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

## Applications

- Industry control systems
- Battery-powered systems
- Audio Signal Routing
- Portable Instruments and Mobile Device

## Pin Configuration

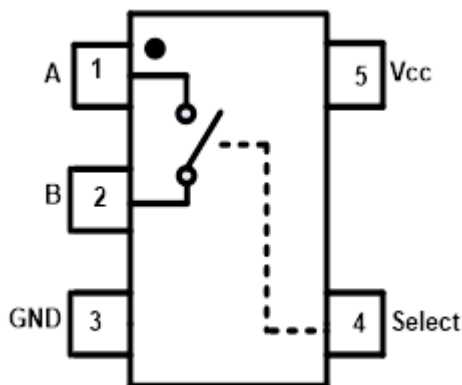

## Description

TPW3115 is high performance Single Pole/Single Throw (SPST) analog switch. The device features low  $R_{ON}$  of 4Ω maximum at 4.5V  $V_{CC}$  and will operate over the wide  $V_{CC}$  range of 1.65V to 5.5V.

The TPW3115 features very low quiescent current even when the control voltage is lower than the  $V_{CC}$  supply. This feature services the portable applications very well allowing for the direct interface with processor general purpose I/Os, can tolerate 1.8V CMOS logic in select input when  $V_{CC}$  supply is in the range of 4.75V to 5.25V.

TPW3115 is available in SOT23-5 and SOT353 package, and characterized from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

## Function Table

Input: Select Pin	Function
Low	Switch Off
High	Switch On

## Pin Description

Pin name	Pin No	Pin function
A	1	Switch Port 1
B	2	Switch Port 2
GND	3	Ground
Select	4	Select pin
$V_{CC}$	5	Power supply

## Table of Contents

Features .....	1
Applications .....	1
Description .....	1
Function Table .....	1
Pin Description .....	1
Table of Contents .....	2
Revision History .....	3
Order Information .....	3
Absolute Maximum Ratings <sup>Note 1</sup> .....	4
ESD and Latch Up Rating .....	4
Thermal Information .....	4
Recommended Operating Conditions <sup>Note 1</sup> .....	4
Electrical Characteristics .....	5
V <sub>CC</sub> = 4.5 to 5.5V, unless otherwise noted. ....	5
V <sub>CC</sub> = 2.7 to 3.6V, unless otherwise noted. ....	6
Typical Performance Characteristics .....	7
Test Circuit and Waveforms .....	8
Application Information .....	9
Tape and Reel Information .....	10
Package Outline Dimensions .....	11
SOT353 .....	11
SOT23-5 .....	12
IMPORTANT NOTICE AND DISCLAIMER .....	13

## Revision History

Date	Revision	Notes
2019/5/1	Rev 0	Initial Version
2019/11/9	Rev Pre	Pre-Release Version
2020/6/28	Rev A.0	Page 5: update condition of $\Delta ICC$ to test setup; Page 6: Remove $\Delta R_{ON}$ Spec for typo.
2022/8/4	Rev A.1	Update the package name from SC70-5 to SOT353

## Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity
TPW3115-S5TR	-40 to 125°C	5-Pin SOT23	W15XX <sup>Note 1</sup>	3	Tape and Reel, 3000
TPW3115-SC5R	-40 to 125°C	5-Pin SOT353	W15XX <sup>Note 1</sup>	3	Tape and Reel, 3000

Note 1: "XX" identify the manufacture information.

## Absolute Maximum Ratings <sup>Note 1</sup>

Parameters	Rating
Supply Voltage, $V_{CC}$	-0.5V to 6V
Select Input Voltage	-0.5V to 6V
Select Input Diode Current	-50mA
Switch I/O Port Voltage	-0.5 to $V_{CC} + 0.5$
Switch I/O Port diode current	$\pm 50$ mA
Switch Current	100mA
Maximum Junction Temperature	150°C
Storage Temperature Range	-65 to 150°C
Lead Temperature (Soldering, 10 sec)	260°C

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

## ESD and Latch Up Rating

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001	3.5	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002	1.5	kV
LU	Latch Up	JESD 78, 25°C	600	mA
		JESD 78, 125°C	600	mA

## Thermal Information

Package Type	$\theta_{JA}$	$\theta_{JC}$	Unit
5-Pin SOT353	400	100	°C/W
5-Pin SOT23	250	81	°C/W

## Recommended Operating Conditions <sup>Note 1</sup>

Over operating temperature range

Parameters	Min	Max	Unit
Supply Voltage, $V_{CC}$	1.65	5.5	V
Select Input Voltage	0	$V_{CC}$	V
Input Transition Rise and Fall Rate		100	ns/V
Switch I/O Port Voltage	0V	$V_{CC}$	V
Operating Temperature Range	-40	125	°C

Note 1: Select input must be held HIGH or LOW and it must not float.

## Electrical Characteristics

**V<sub>CC</sub> = 4.5 to 5.5V, unless otherwise noted.**

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
<b>Power Supply</b>								
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = 0V or V <sub>CC</sub>	5.5	0.3	0.5	1.5	Max	μA
ΔI <sub>CC</sub>	Increase in I <sub>CC</sub> per Input	Select Input at 1.8V, others at V <sub>CC</sub> or GND	5.5	50			Max	μA
<b>Digital Input</b>								
V <sub>IH</sub>	Input Voltage High		5		1.5	1.5	Min	V
V <sub>IL</sub>	Input Voltage Low		5		0.7	0.7	Max	V
I <sub>IN</sub>	Control Input Leakage	V <sub>IN</sub> = 0V or V <sub>CC</sub>	5.5	±50	±500	±1000	Max	nA
<b>Analog Switch</b>								
R <sub>ON</sub>		I <sub>OUT</sub> = 50mA, B = 3.5V	4.5	4			Typ	Ω
R <sub>ON</sub>		I <sub>OUT</sub> = 50mA, B = 3.5V	4.5	4.8	6	6	Max	Ω
R <sub>FLAT(ON)</sub>	On Resistance Flatness	I <sub>OUT</sub> = 50mA, B = 0V, 1V, 3.5V	4.5	1.2	2	2	Max	Ω
I <sub>(OFF)</sub>	Switch OFF Leakage Current	A = 1V, 4.5V, B = 4.5V, 1V	5.5	±10	±50	±100	Max	nA
I <sub>(ON)</sub>	Switch ON Leakage Current	A = 1V, 4.5V, B = 1V, 4.5V or Floating	5.5	±10	±50	±100	Max	nA
<b>Dynamic Characteristics</b>								
t <sub>PHL</sub> , t <sub>PLH</sub>	Switch IN to OUT time	B = 3V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	4.75	5			Typ	ns
t <sub>ON</sub>	Switch turn-on time	B = 3V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	4.75	85	100	100	Max	ns
t <sub>OFF</sub>	Switch turn-off time	B = 3V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	4.75	85	100	100	Max	ns
Q	Charge Injection	C <sub>L</sub> = 1.0nF, V <sub>GEN</sub> = 0V, R <sub>GEN</sub> = 0Ω, Figure 4	5	20			Typ	pC
	OFF-Isolation	f = 1MHz, R <sub>L</sub> = 50Ω, Figure 5	5	-65			Typ	dB
BW	Bandwidth	R <sub>L</sub> = 50Ω	5	250			Typ	MHz
THD	Total Harmonic Distortion	R <sub>L</sub> = 600Ω, V <sub>IN</sub> = 0.5V <sub>PP</sub> , f = 20Hz to 20kHz	5	0.004			Typ	%
<b>Capacitance</b>								
C <sub>IN</sub>	Select Input capacitance		5	5			Typ	pF
C <sub>OFF</sub>	B-Port Off capacitance		5	12			Typ	pF
C <sub>ON</sub>	ON Capacitance		5	40			Typ	pF

**V<sub>CC</sub> = 2.7 to 3.6V, unless otherwise noted.**

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
<b>Power Supply</b>								
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = 0V or V <sub>CC</sub>	3.6	0.3	0.5	1.5	Max	μA
<b>Digital Input</b>								
V <sub>IH</sub>	Input Voltage High				1.35	1.35	Min	V
V <sub>IL</sub>	Input Voltage Low				0.3	0.3	Max	V
I <sub>IN</sub>	Control Input Leakage	V <sub>IN</sub> = 0V or V <sub>CC</sub>	3.6		±1	±1	Max	μA
<b>Analog Switch</b>								
R <sub>ON</sub>		I <sub>OUT</sub> = 10mA, B = 1.5V	2.7	10			Typ	Ω
R <sub>ON</sub>		I <sub>OUT</sub> = 10mA, B = 1.5V	2.7	15	20	20	Max	Ω
ΔR <sub>ON</sub>	Maximum ON resistance	I <sub>OUT</sub> = 10mA, B = 1.5V	2.7	2	4	4	Max	Ω
R <sub>FLAT(ON)</sub>	On Resistance Flatness	I <sub>OUT</sub> = 10mA, B = 0V, 0.75V, 1.5V	2.7	8	10	10	Max	Ω
I <sub>(OFF)</sub>	Switch OFF Leakage Current	A = 0V, 3.6V, B = 3.6V, 0V	3.6	±10	±50	±100	Max	nA
I <sub>(ON)</sub>	Switch ON Leakage Current	A = 0V, 3.6V, B = 0V, 3.6V or Floating	3.6	±10	±50	±100	Max	nA
<b>Dynamic Characteristics</b>								
t <sub>PHL</sub> , t <sub>PLH</sub>	Switch IN to OUT time	B = 2.5V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	2.7	10			Typ	ns
t <sub>ON</sub>	Switch turn-on time	B = 2.5V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	2.7	200	220	220	Max	ns
t <sub>OFF</sub>	Switch turn-off time	B = 2.5V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 100pF, Figure 3	2.7	200	220	220	Max	ns
Q	Charge Injection	C <sub>L</sub> = 1.0nF, V <sub>GEN</sub> = 0V, R <sub>GEN</sub> = 0Ω, Figure 4	3	20			Typ	pC
	OFF-Isolation	f = 1MHz, R <sub>L</sub> = 50Ω, Figure 5	3	-65			Typ	dB
BW	Bandwidth	R <sub>L</sub> = 50Ω	3	250			Typ	MHz
THD	Total Harmonic Distortion	R <sub>L</sub> = 600Ω, V <sub>IN</sub> = 0.5V <sub>PP</sub> , f = 20Hz to 20kHz	3	0.01			Typ	%

## Typical Performance Characteristics

V<sub>CC</sub> = 5V, unless otherwise specified.

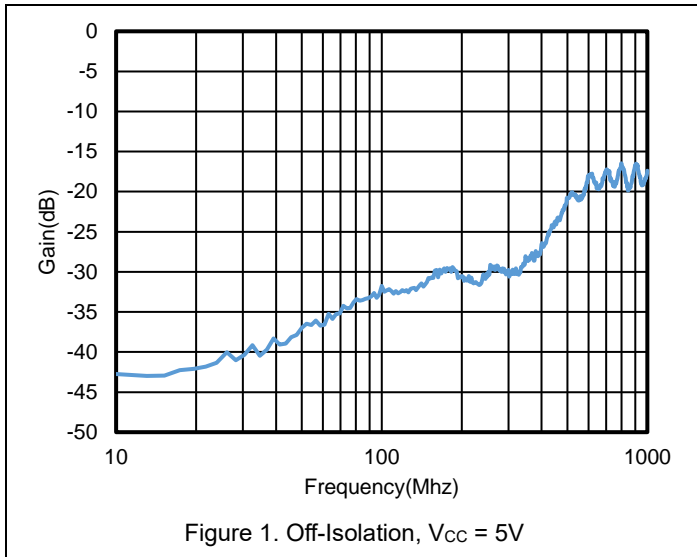


Figure 1. Off-Isolation, V<sub>CC</sub> = 5V




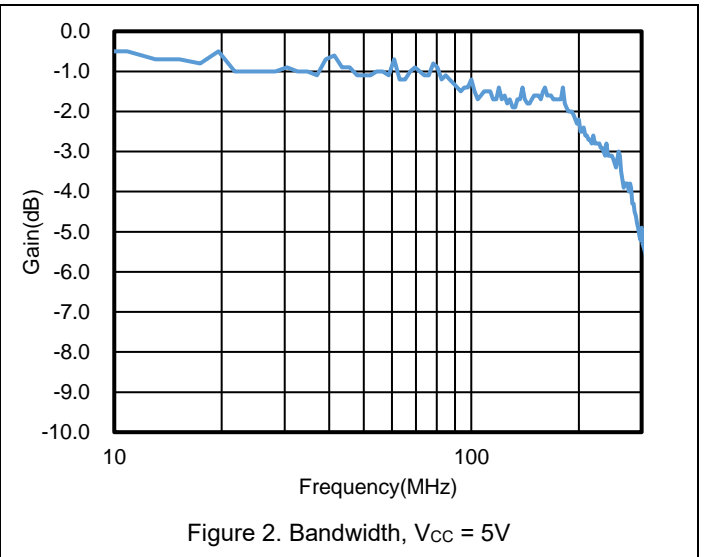


Figure 2. Bandwidth, V<sub>CC</sub> = 5V

**Test Circuit and Waveforms**

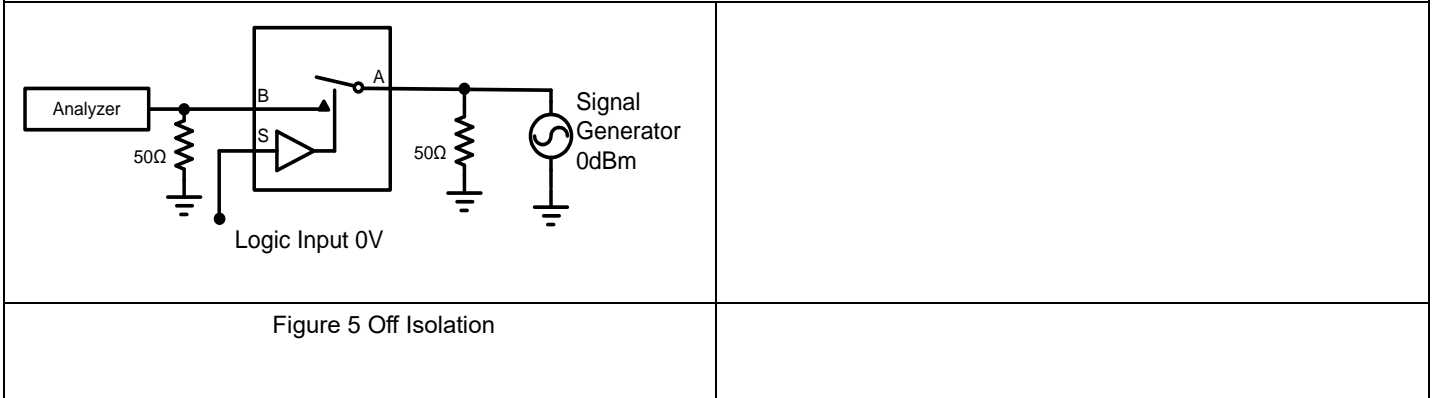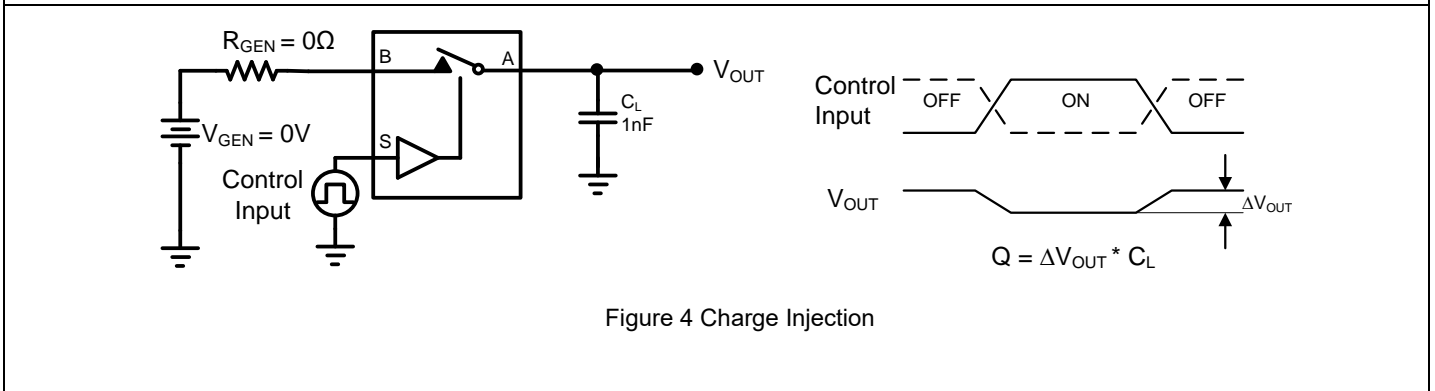


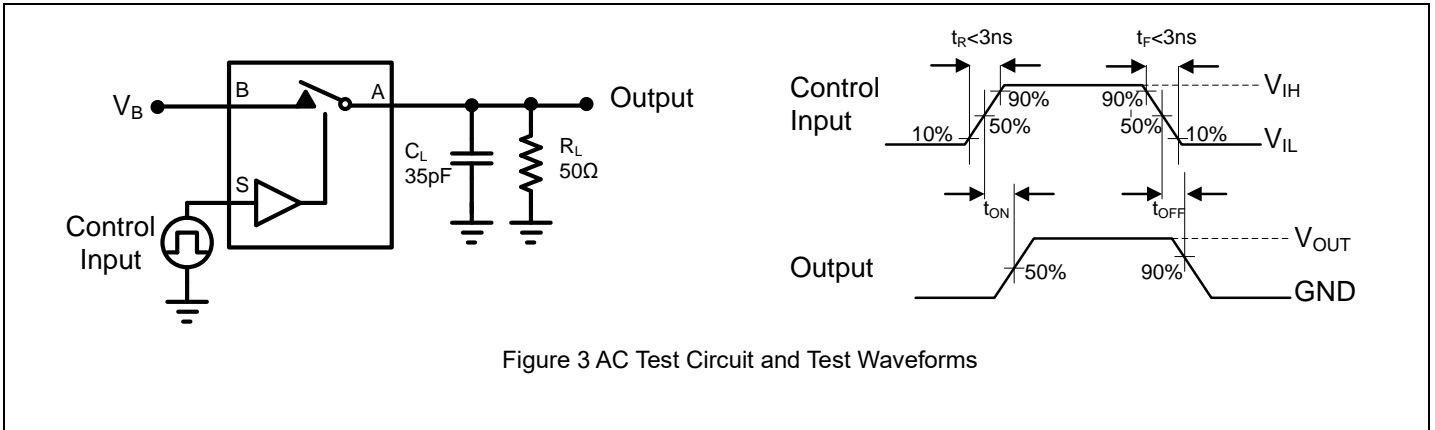

## Application Information

A 0.1-μF bypass capacitor on V<sub>CC</sub> and GND is recommended to prevent power disturbance.


### Tape and Reel Information

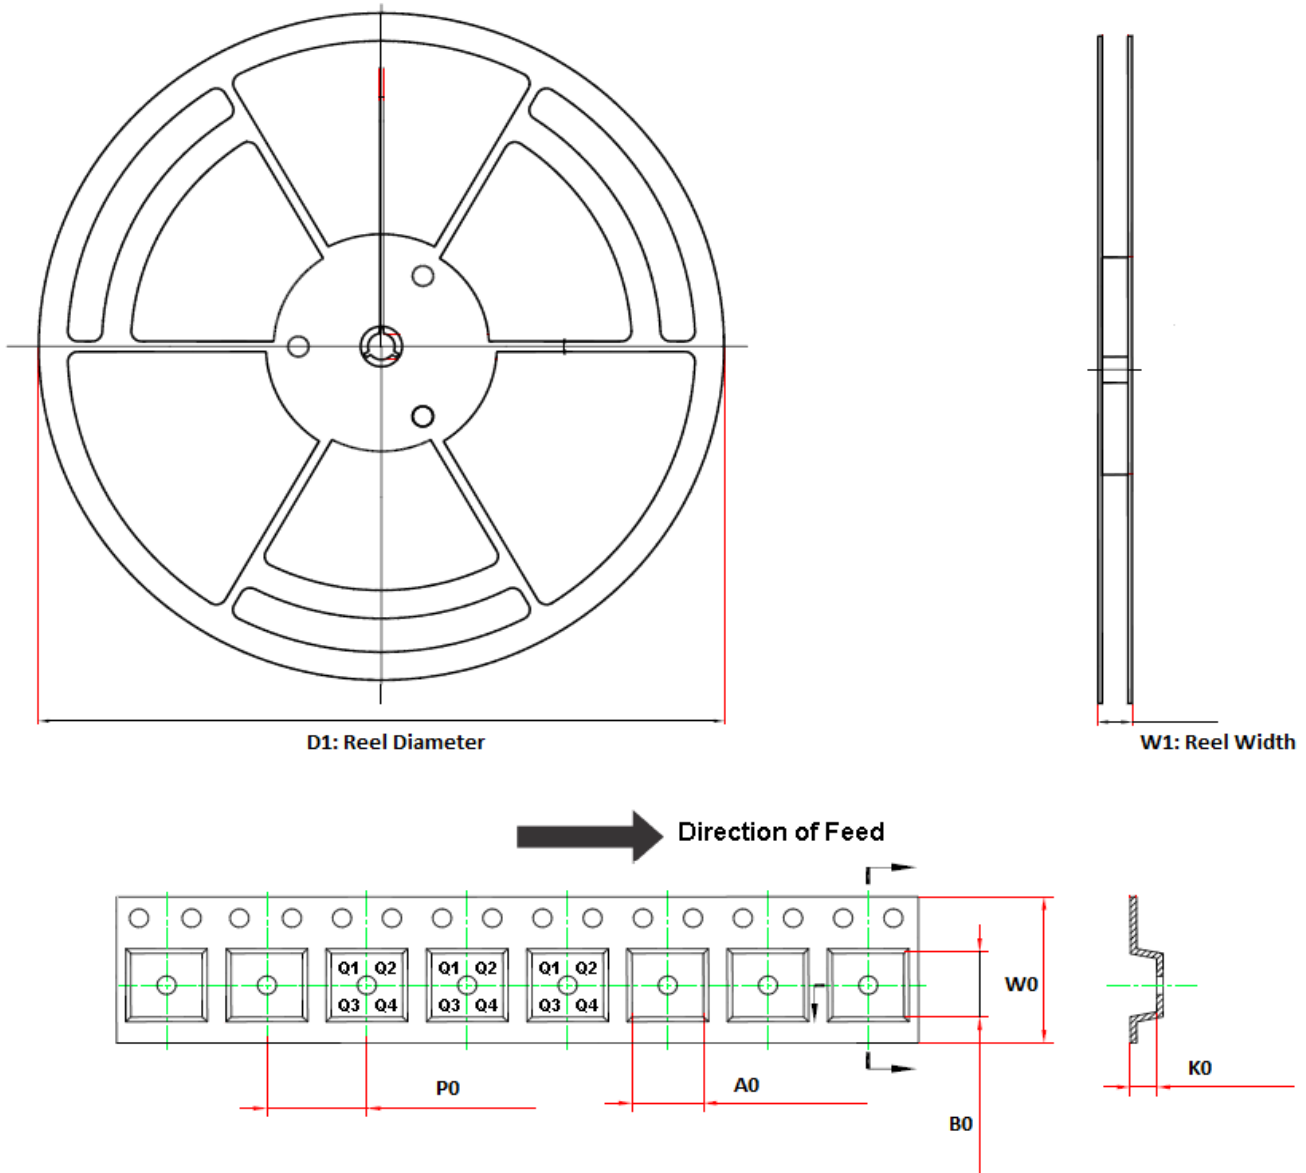


Order Number	Package	D1	W1	A0	B0	K0	P0	W0	Pin1 Quadrant
TPW3115-SC5R	5-Pin SOT353	178.0	12.3	2.4	2.5	1.2	4.0	8.0	Q3
TPW3115-S5TR	5-Pin SOT23	180.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3

Package Outline Dimensions

SOT353

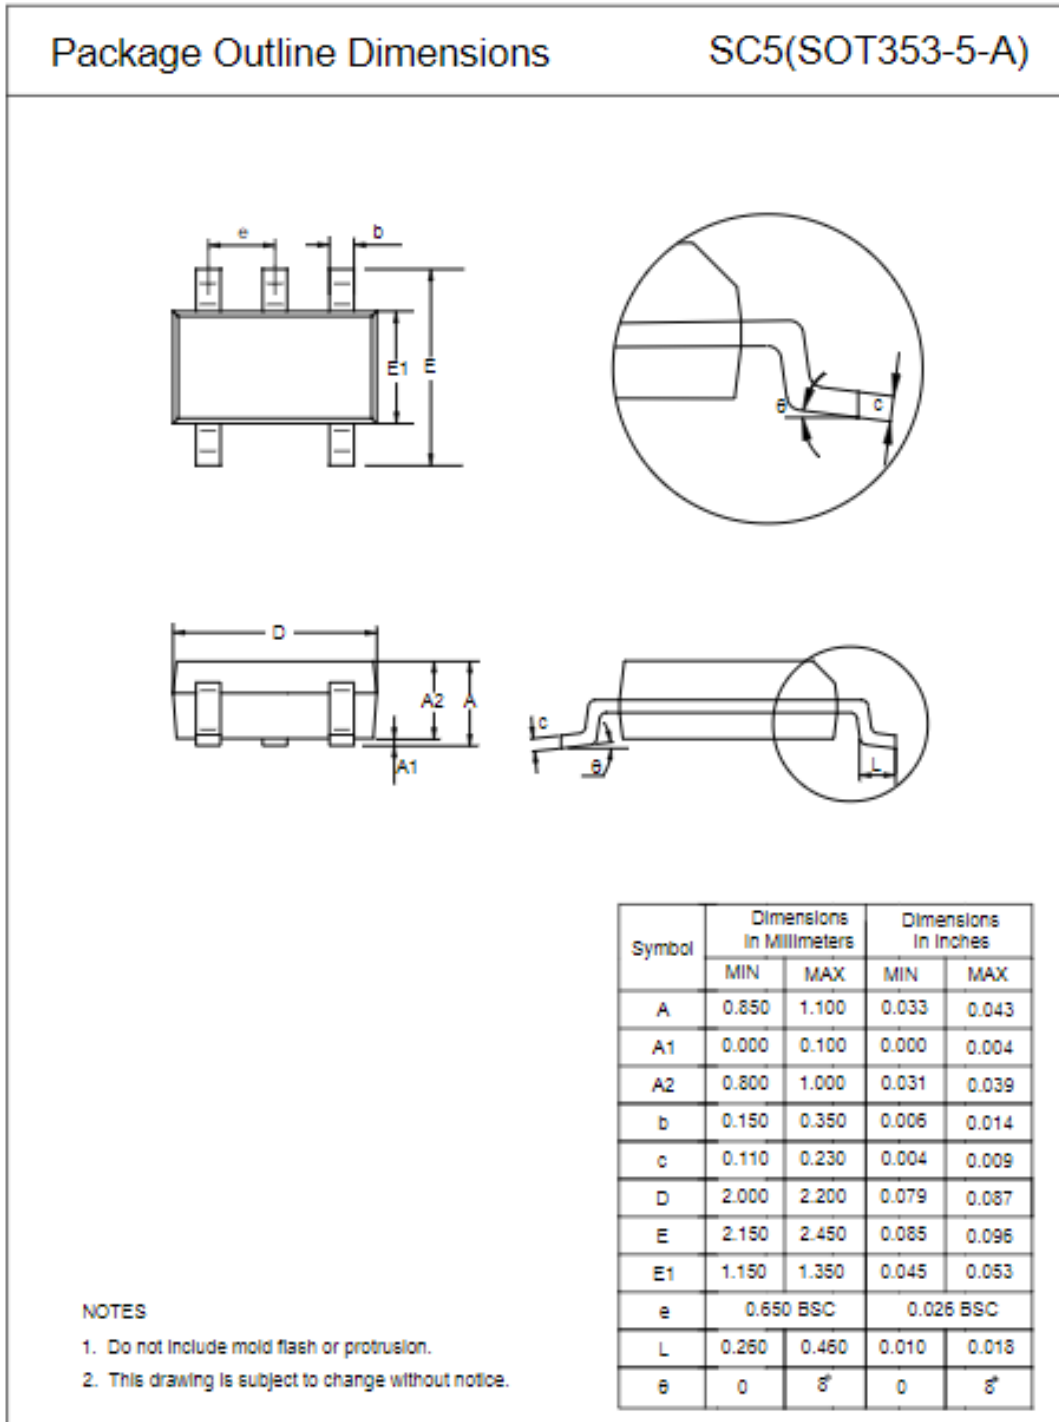

SOT23-5

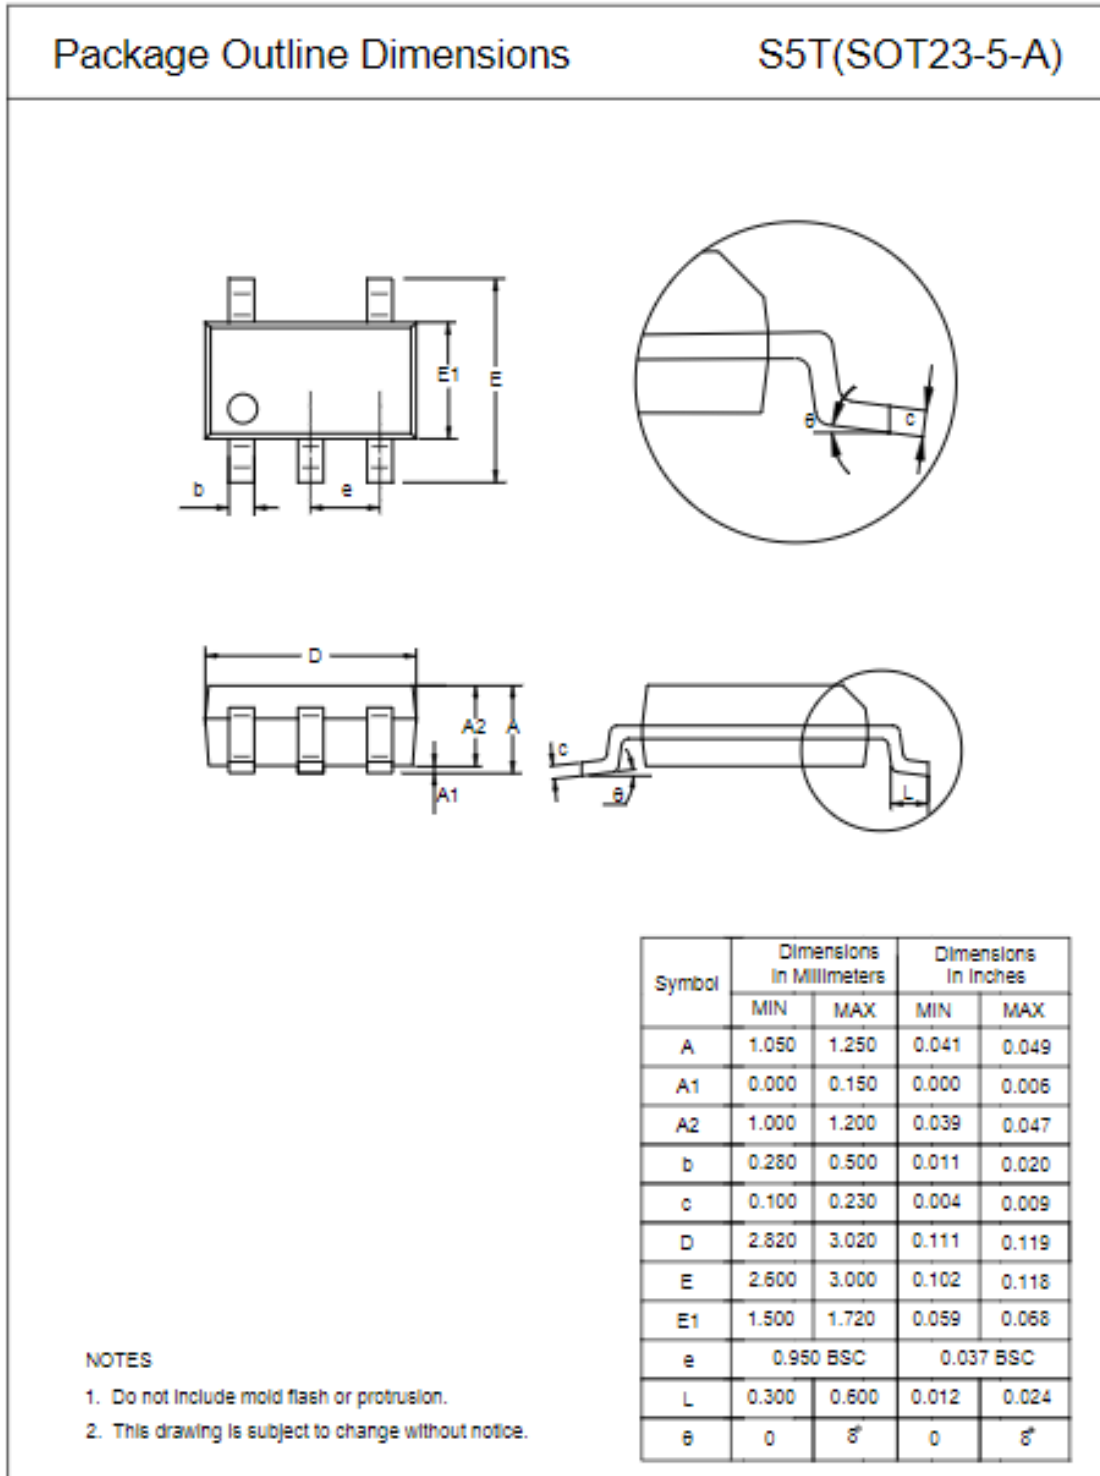

## IMPORTANT NOTICE AND DISCLAIMER

**Copyright**© 3PEAK 2012-2023. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.