



FEATURES


- High Power Density
- Over 500,000 cycle life (semi-permanent)
- 2 units serially connected to provide 6.0V products
- RoHS compliant
- Long-term reliability improved at high temperature and humidity




Drawing

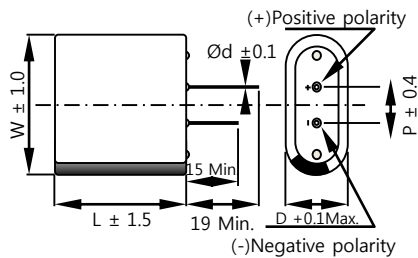

I TYPE

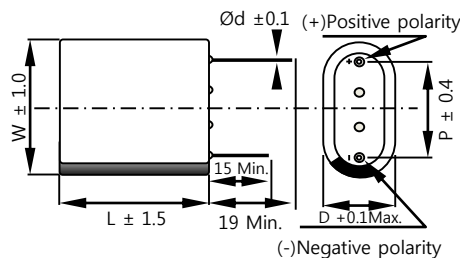

O TYPE

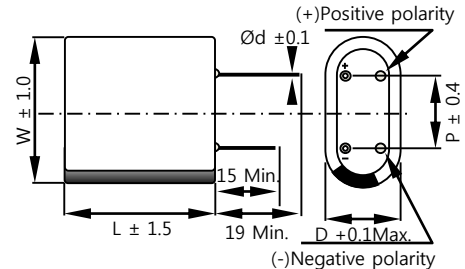

H TYPE

D = 10.5mm, d = 0.6mm

TYPE	I	O	H
P	5.0	16.0	10.5

(Unit : mm)

SPECIFICATION

ITEM		CHARACTERISTICS	
Product series		EDLC 2 SERIAL MODULE	
Rated Voltage (V _R)		6.0V	
Operating Temperature		-40 ~ +65℃	
Capacitance Tolerance		-10 ~ +30%	
High Temperature Load Life		After 1,000 hours at V _R loaded under +65℃, capacitors meet the following criteria.	
		Capacitance Change	≤ 30% of initial value
		ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000	
	ΔC	≤ 30% of initial value	
	ESR	≤ 2 times of specified value	
	Method	Cycle of Charge/discharge from V _R to 1/2V _R	
Shelf Life		3 Years	
		No Electrical Charge, Temperature below 25℃ (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of specified value)	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)		Size (mm) D x W x L
			AC(1kHz)	DC		@5.4V	@6.0V	
WEC6R0255QG	6.0	2.5	165	245	4.5	0.010	0.015	10.5x21x22.5

* Max. Current : 1 sec. discharge to $1/2V_R$

* When do module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour.