

Power Splitter/Combiner

ZN8PD-642W-S+

8 Way-0° 50Ω 1800 to 6400 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.875W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,.....,8	1,2,3,.....,8

Outline Drawing

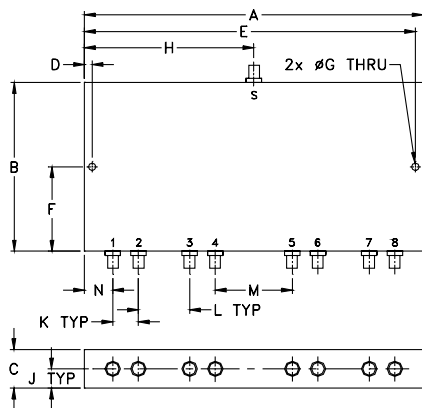


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
6.60	3.28	.75	.150	6.45	1.64	.144
167.64	83.31	19.05	3.81	163.83	41.66	3.66
H	J	K	L	M	N	wt
3.30	.38	.500	1.000	1.500	0.550	grams
83.82	9.65	12.70	25.4	38.1	13.97	360


Electrical Schematic




ZN8PD-642W-S+
TOTAL LOSS

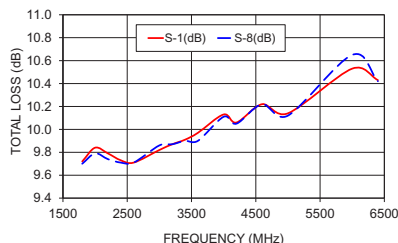

ZN8PD-642W-S+
ISOLATION

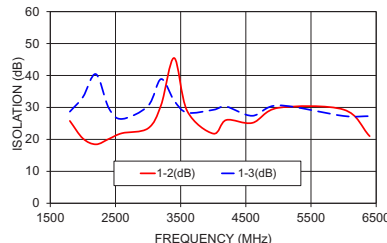

ZN8PD-642W-S+
VSWR

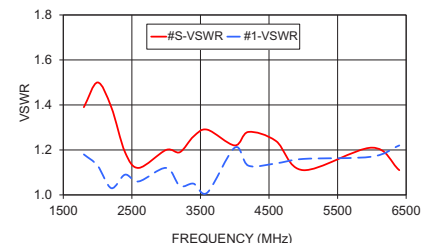

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Features

- wideband, 1800 to 6400 MHz
- low insertion loss, 1.5 dB typ.
- low amplitude unbalance, 0.2 dB typ.
- excellent output VSWR, 1.15:1 typ.
- DC PASS from sum port to output ports

Applications

- high band PCS
- UNII
- WIMAX
- WiFi
- bluetooth

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1800		6400	MHz
Insertion Loss (above theoretical 9.0 dB)	1800-3200	—	0.9	1.4	dB
	3200-6400	—	1.5	2.3	
Isolation	1800-3200	15	20	—	dB
	3200-6400	18	25	—	
Phase Unbalance	1800-3200	—	2	8	Degree
	3200-6400	—	5	12	
Amplitude Unbalance	1800-3200	—	0.15	0.5	dB
	3200-6400	—	0.30	0.7	
VSWR (Port S)	1800-3200	—	1.4	—	:1
	3200-6400	—	1.2	—	
VSWR (Port 1-8)	1800-3200	—	1.15	—	:1
	3200-6400	—	1.15	—	

1. Over -55°C to +55°C. Derate linearly to 20% of rating at 100°C

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amp. Unb. (dB)	Isolation (dB)				Phase Unb. (deg.)	VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-3	3-4	5-6				
1800	9.72	9.67	9.66	9.64	9.77	9.70	0.16	25.78	28.68	26.43	24.46	1.73	1.39	1.18	1.19
2000	9.84	9.80	9.83	9.81	9.92	9.79	0.13	20.29	33.24	20.60	19.95	1.89	1.50	1.13	1.15
2200	9.79	9.77	9.74	9.72	9.81	9.74	0.14	18.45	40.43	18.75	18.57	1.44	1.39	1.03	1.09
2400	9.73	9.74	9.70	9.66	9.80	9.71	0.15	20.16	29.69	19.86	19.97	1.49	1.19	1.09	1.07
2600	9.71	9.75	9.73	9.71	9.83	9.71	0.12	21.93	26.40	21.99	22.22	1.40	1.12	1.06	1.04
3000	9.82	9.87	9.88	9.84	9.99	9.86	0.17	23.46	30.50	23.32	23.43	1.64	1.20	1.12	1.11
3200	9.87	9.90	9.90	9.86	9.99	9.87	0.13	30.75	38.89	28.89	29.31	2.00	1.19	1.04	1.07
3400	9.91	9.91	9.90	9.88	10.03	9.90	0.16	45.47	32.14	35.75	37.68	2.11	1.26	1.05	1.02
3600	9.97	9.97	9.95	9.96	10.03	9.90	0.13	28.90	28.38	27.91	28.25	2.21	1.29	1.01	1.03
4000	10.13	10.19	10.24	10.28	10.34	10.11	0.28	21.81	29.25	20.71	20.89	2.25	1.22	1.21	1.12
4200	10.06	10.14	10.15	10.13	10.23	10.05	0.20	26.07	30.25	24.95	23.54	2.48	1.28	1.13	1.07
4600	10.22	10.27	10.19	10.13	10.30	10.22	0.18	25.17	27.39	23.49	25.46	3.48	1.24	1.14	1.05
5000	10.14	10.17	10.16	10.12	10.35	10.12	0.24	29.89	30.66	32.53	29.80	4.17	1.11	1.16	1.11
6000	10.53	10.56	10.49	10.39	10.78	10.65	0.38	29.32	27.33	29.76	29.12	5.23	1.21	1.17	1.15
6400	10.43	10.46	10.48	10.49	10.59	10.42	0.23	21.01	27.28	20.87	21.95	5.65	1.11	1.22	1.11

1. Total Loss = Insertion Loss + 9dB theoretical splitter loss.