


Product Overview

The CMD251C3 is a general purpose double balanced mixer in a leadless surface mount package that can be used for up and down converting applications between 4 and 8.5 GHz. The CMD251C3 has very high isolation to both the RF and IF ports due to the optimized balun structures and can operate with an LO drive level as low as +15 dBm. The CMD251C3 can easily be configured as an image reject mixer or single sideband modulator with external hybrids and power splitters.

Functional Block Diagram

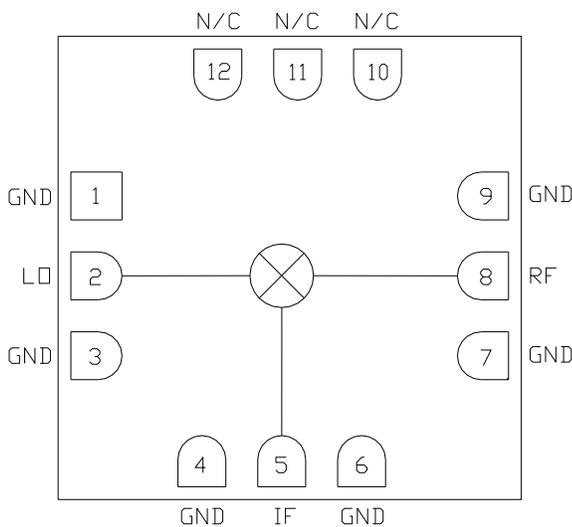

Key Features

- Low Conversion Loss
- High Isolation
- Wide IF Bandwidth
- Passive Double Balanced Topology
- Pb-Free RoHs Compliant 3x3 mm SMT Package

Ordering Information

Part No.	Description
CMD251C3	500 Piece 7" Reel
CMD251C3-EVB	Evaluation Board

Electrical Performance (IF = 100 MHz, LO = +17 dBm, T_A = 25° C, F = 6 GHz)

Parameter	Min	Typ	Max	Units
Frequency Range, RF & LO		4 - 8.5		GHz
Frequency Range, IF	DC		2.2	GHz
Conversion Loss		7		dB
LO to RF Isolation		45		dB
LO to IF Isolation		36		dB
RF to IF Isolation		25		dB
Input IP3		21		dBm

Unless otherwise noted, all measurements performed as a downconverter, IF = 100 MHz

Absolute Maximum Ratings

Parameter	Rating
RF / IF Input Power	+24 dBm
LO Drive	+24 dBm
Operating Temperature	-40 to 85° C
Storage Temperature	-55 to 150° C
Thermal Resistance, θ_{JC}	287° C/ W
Power Dissipation, P_{diss}	226 mW

Exceeding any one or combination of the maximum ratings may cause permanent damage to the device.


Electrical Specifications (IF = 100 MHz, LO = +17 dBm, $T_A = 25^\circ C$)

Parameter	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range, RF & LO	4 - 7			7 - 8.5			GHz
Frequency Range, IF	DC		2.2	DC		2.2	GHz
Conversion Loss		7	8.5		8.5	10	dB
Noise Figure (SSB)		7	8.5		8.5	10	dB
LO to RF Isolation	40	45		40	45		dB
LO to IF Isolation	30	40		42	50		dB
RF to IF Isolation	15	25		30	35		dB
Input P_{1dB}		16			17		dBm
Input IP3		22			25		dBm


Unless otherwise noted, all measurements performed as a downconverter, IF = 100 MHz

Typical Performance

Conversion Gain vs. Temperature, LO = +17 dBm, IF = 100 MHz USB

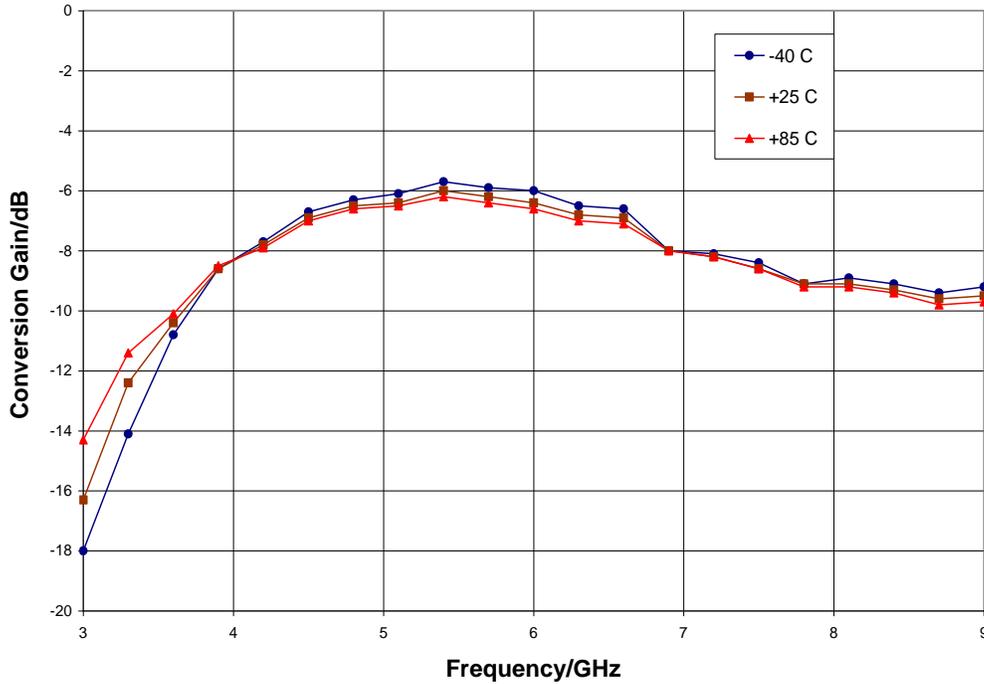


Isolation, LO = +17 dBm

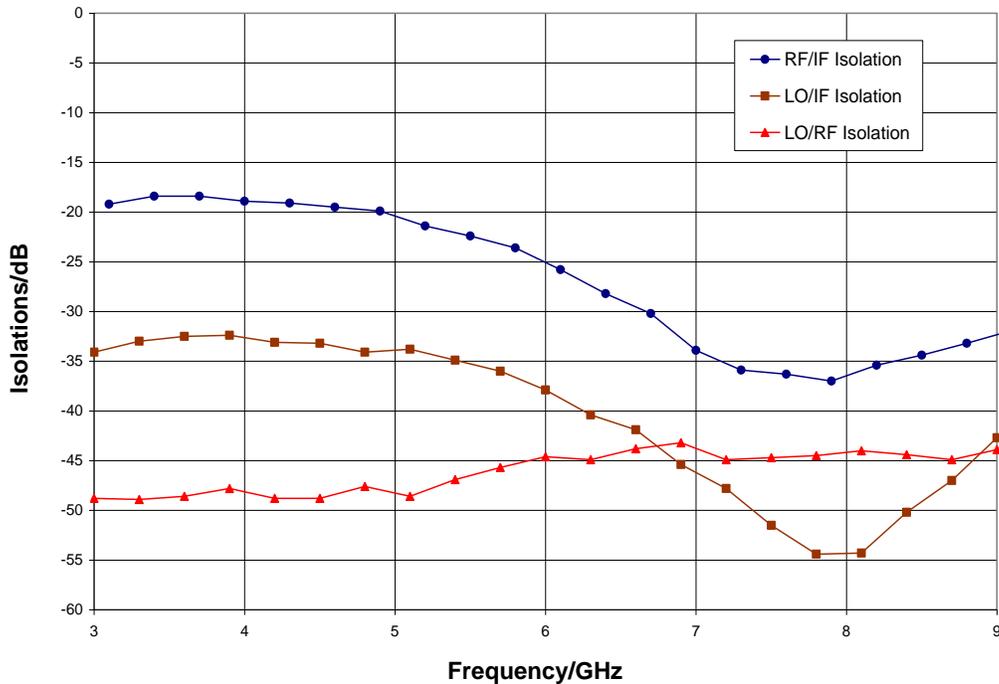


Typical Performance

Conversion Gain vs. LO Drive, IF = 100 MHz USB

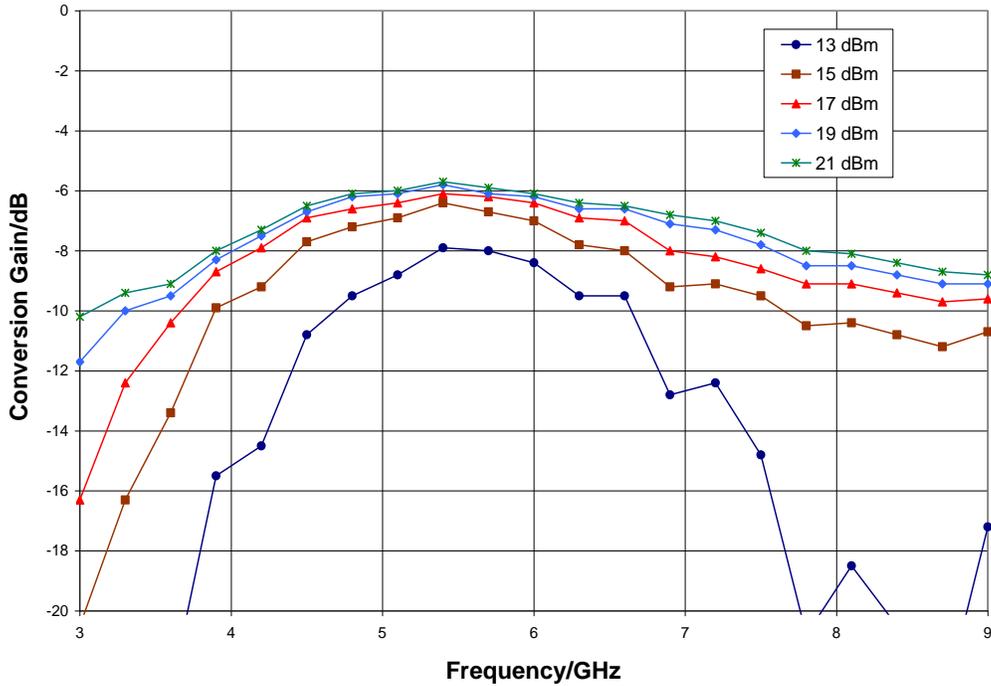


Return Loss, LO = +17 dBm

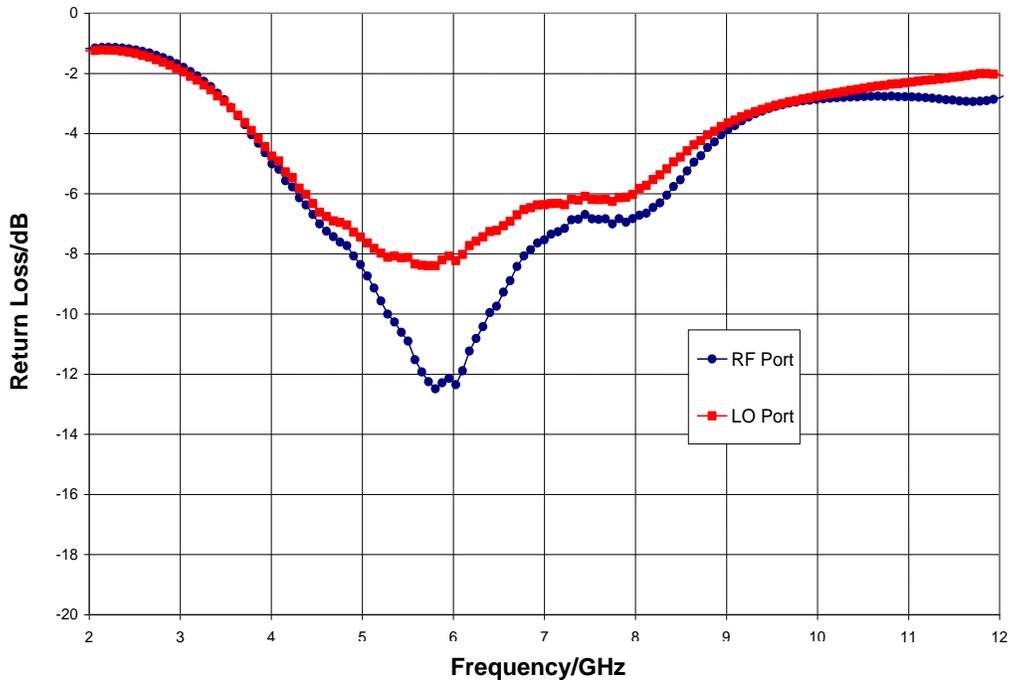


Typical Performance

IF Bandwidth, LO = +17 dBm

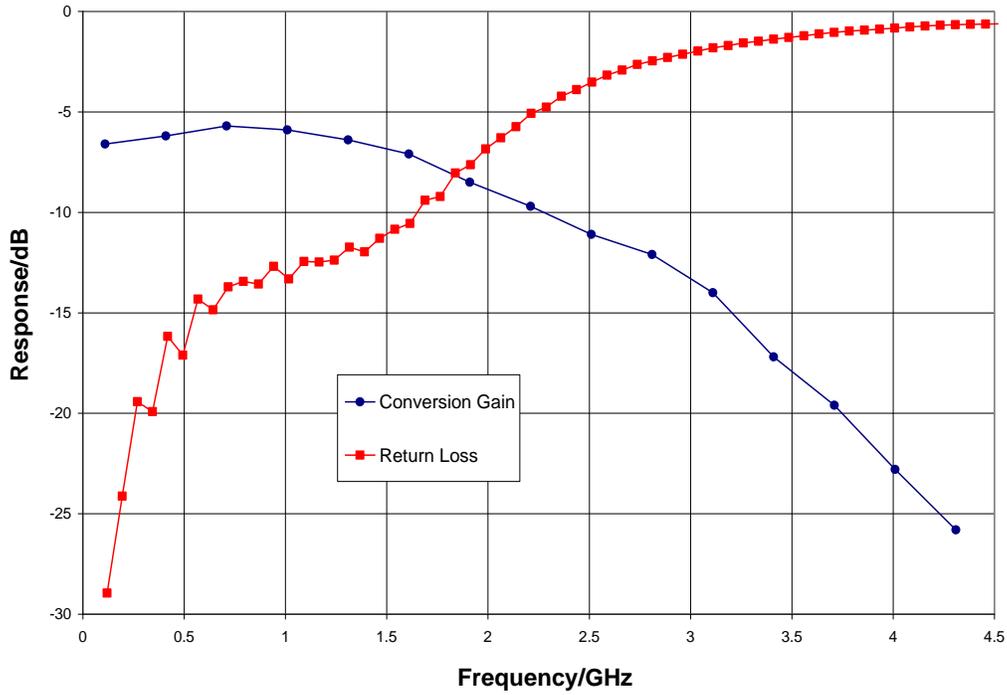


Upconverter Performance, Conversion Gain vs. LO Drive, IF input = 100 MHz

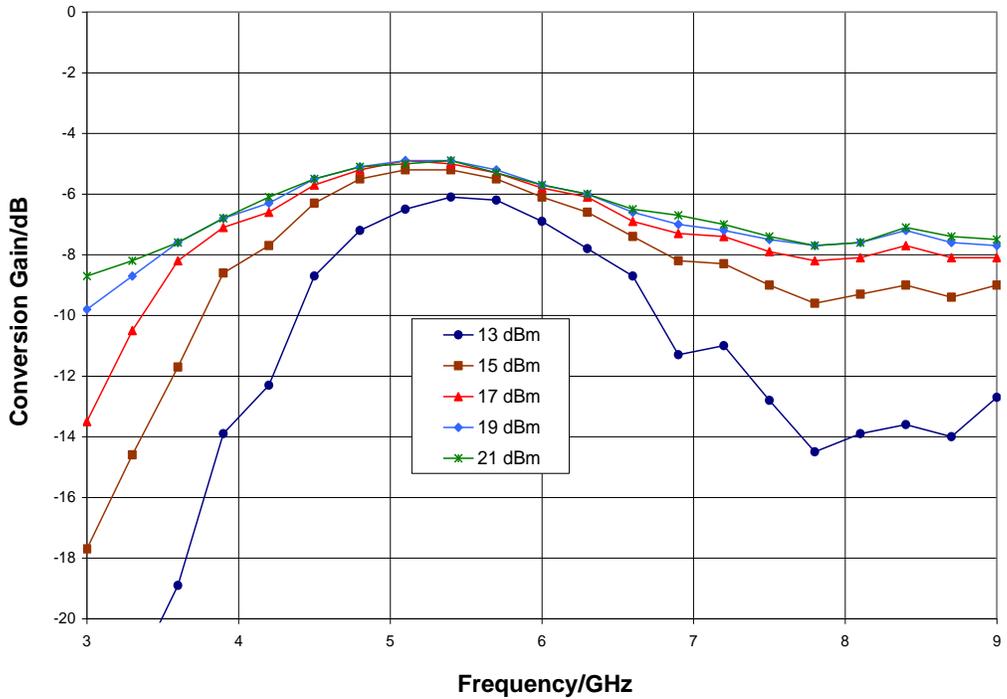


Typical Performance

Input IP3 vs. Temperature, LO = +17 dBm, IF = 100 MHz

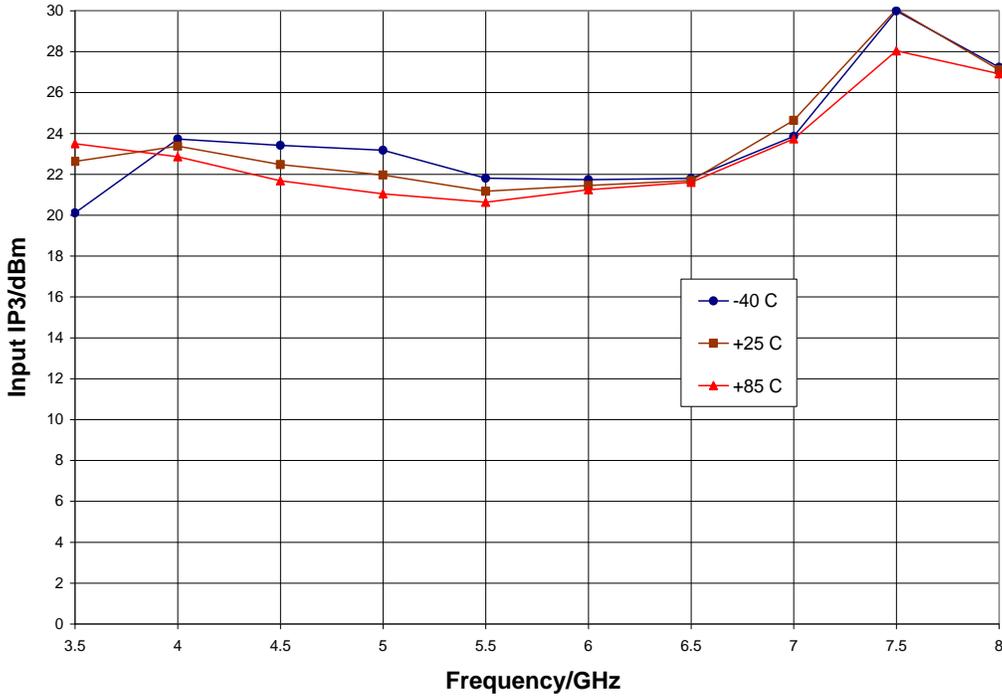


Input IP3 vs. LO Drive, IF = 100 MHz

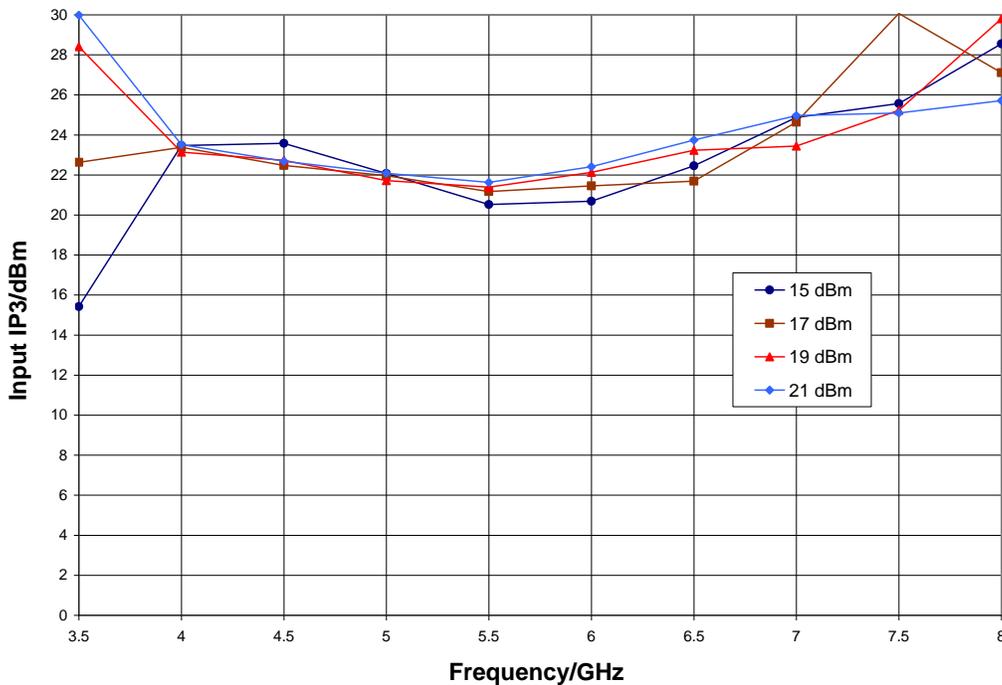


Typical Performance

Upconverter Performance, Input IP3 vs. LO Drive, IF = 100 MHz

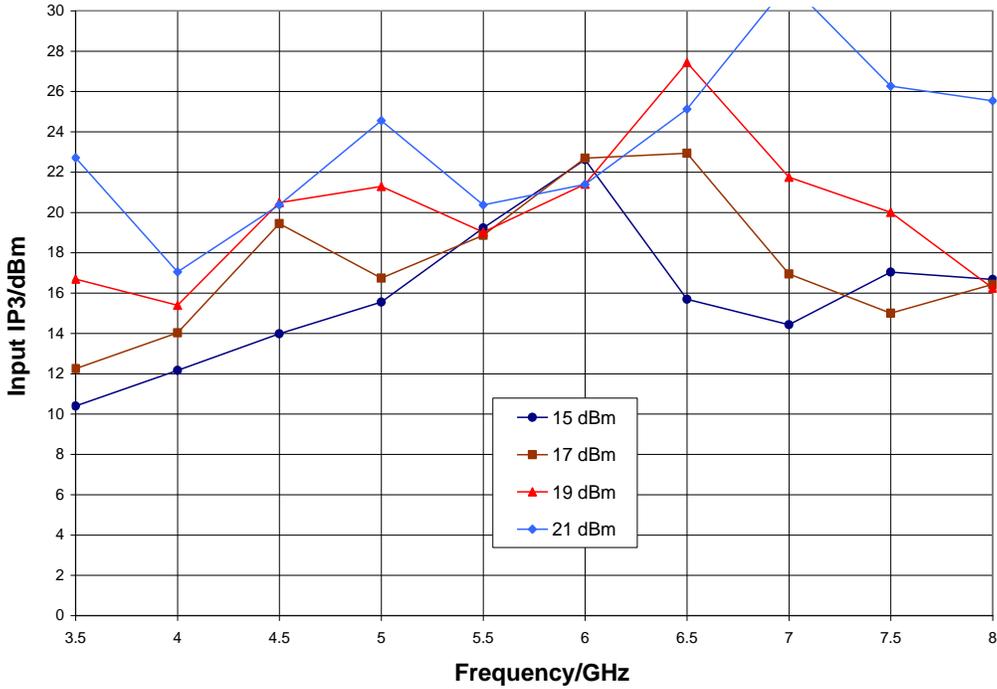

Input P1dB vs. Temperature, LO = +17 dBm, IF = 100 MHz USB

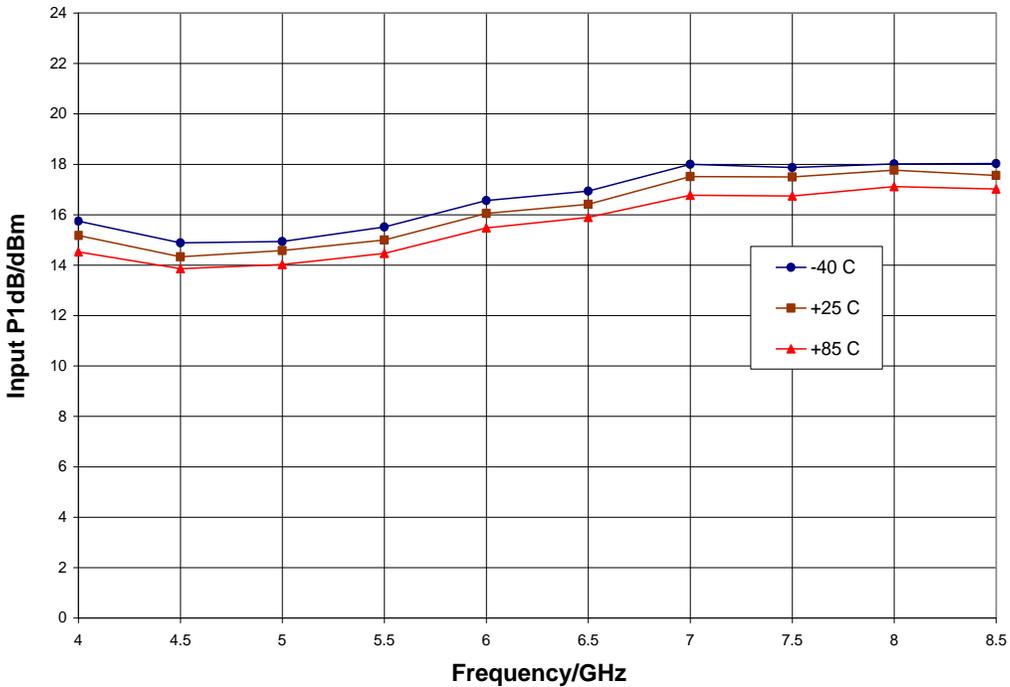

Typical Performance

MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	7	9	22	35
1	21	0	35	36	39
2	67	> 80	70	71	68
3	> 80	> 80	> 80	> 80	> 80
4	> 80	> 80	> 80	> 80	> 80


RF = 6.1 GHz @ -10 dBm

LO = 6.0 GHz @ +17 dBm

All values in dBc below the IF output power level (1RF - 1LO)

Mechanical Information

Package Information and Dimensions

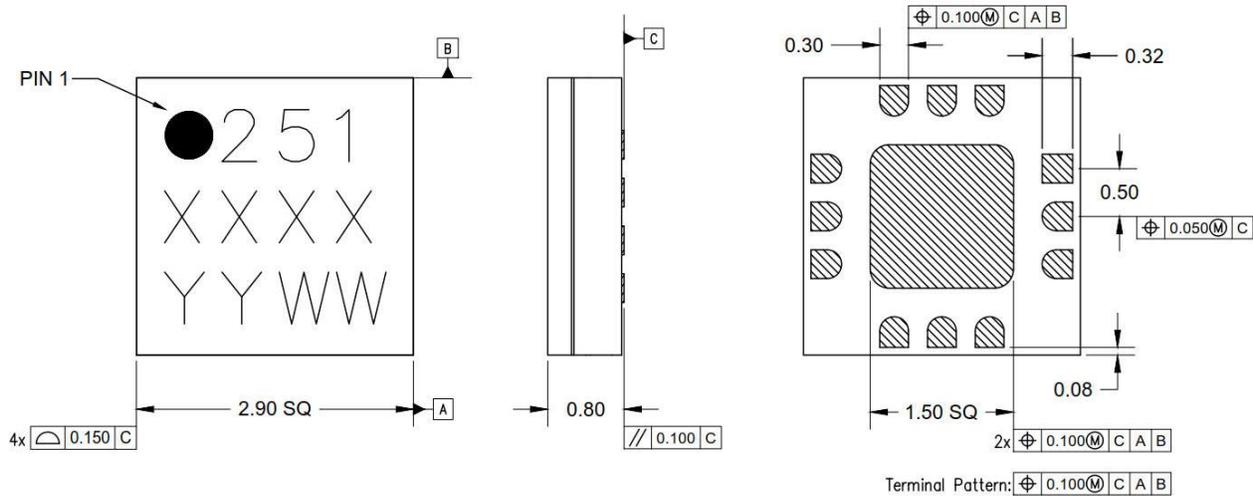

Notes:

1. All dimensions shown in mm.
2. Material: Black alumina
3. Lead finish
 - 3.1. Ni: 8.89um max, 1.27um min
 - 3.2. Pd: 0.17um max, 0.07um min
 - 3.3. Au: 0.254um max, 0.03um min
4. Marking: All marking shall be permanent and legible
 - 4.1. Line 1: Part number
 - 4.1.1. Example: CMD251C3 shall be marked as 251
 - 4.2. Line 2: Lot number
 - 4.3. Line 3: Date code - Last 2 digits of the year of manufacture followed by a 2-digit week code
5. Alternate pin #1 identifier is a single square pad
6. Alternate die paddle may have chamfered corners

Recommended PCB Land Pattern


Qorvo recommends that the user develop the land pattern that will provide the best design for proper solder reflow and device attach for their specific application. Please review Qorvo Application Note AN 105 for a recommended land pattern approach.

Recommended Solder Reflow Profile

Qorvo recommends screen printing with belt furnace reflow to ensure proper solder reflow and device attach. Please review Qorvo Application Note AN 102 for a recommended solder reflow profile.

Pin Description

Pin Diagram

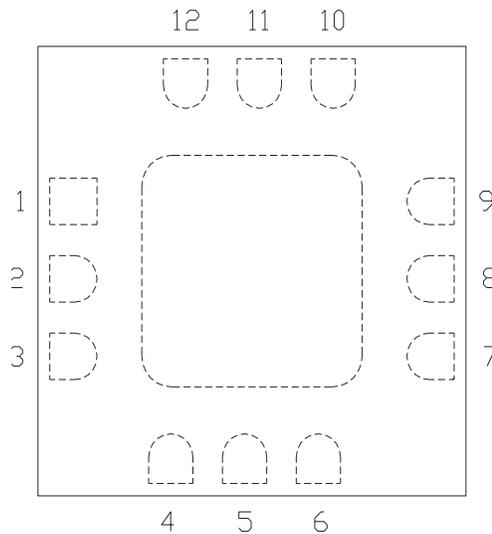


Functional Description

Pin	Function	Description	Schematic
1, 3, 4, 6, 7, 9 and die paddle	Ground	Connect to RF / DC ground.	
2	LO	This pin is DC coupled and matched to 50 ohms.	
5	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 16 mA of current or part non-function or part failure may result.	
8	RF	This pin is DC coupled and matched to 50 ohms.	
10 - 12	N/C	No connection required. These pins may be connected to RF/DC ground.	

Applications Information

Evaluation Board

The circuit board shown has been developed for optimized assembly at Qorvo. A sufficient number of via holes should be used to connect the top and bottom ground planes. As surface mount processes vary, careful process development is recommended.

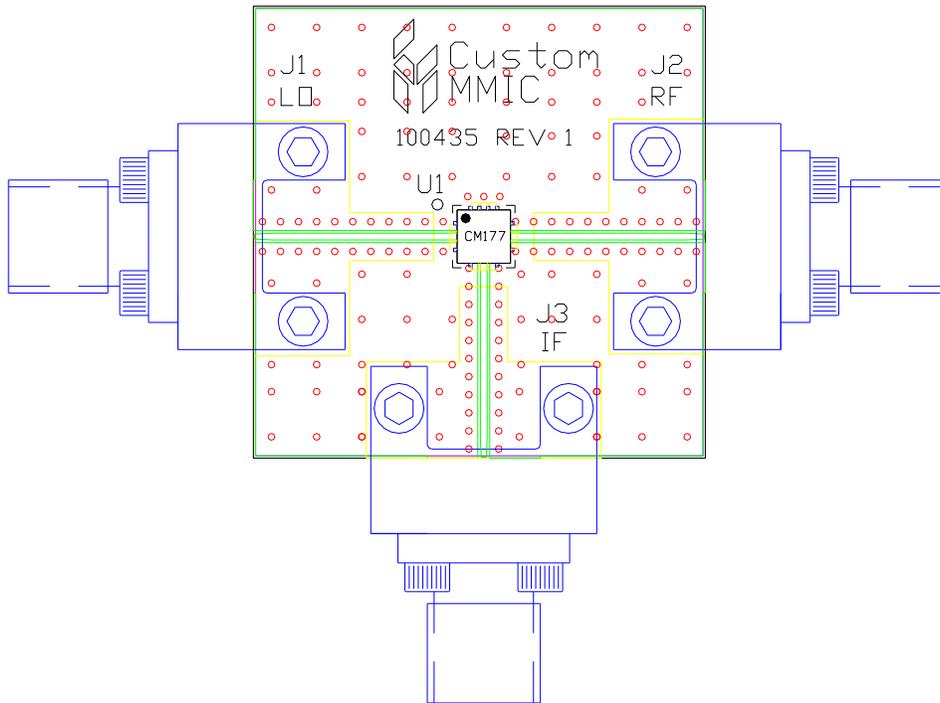

Bill of Material

Designator	Value	Description
J1 - J3		SMA End Launch Connector
U1		CMD251C3 Fundamental Mixer
PCB		100435 Evaluation PCB

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A	ESDA / JEDEC JS-001-2012
MSL – Moisture Sensitivity Level	Level 1	IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained in this Data Sheet and any associated documents (“Data Sheet Information”) is believed to be reliable; however, Qorvo makes no warranties regarding the Data Sheet Information and assumes no responsibility or liability whatsoever for the use of said information. All Data Sheet Information is subject to change without notice. Customers should obtain and verify the latest relevant Data Sheet Information before placing orders for Qorvo® products. Data Sheet Information or the use thereof does not grant, explicitly, implicitly or otherwise any rights or licenses to any third party with respect to patents or any other intellectual property whether with regard to such Data Sheet Information itself or anything described by such information.

DATA SHEET INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo® products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. Applications described in the Data Sheet Information are for illustrative purposes only. Customers are responsible for validating that a particular product described in the Data Sheet Information is suitable for use in a particular application.

© 2022 Qorvo US, Inc. All rights reserved. This document is subject to copyright laws in various jurisdictions worldwide and may not be reproduced or distributed, in whole or in part, without the express written consent of Qorvo US, Inc. | QORVO® is a registered trademark of Qorvo US, Inc.