

Ceramic High Pass Filter

HFCG-1100+

50Ω 1400 to 3900 MHz

The Big Deal

- Small size 2.0 mm x 1.25 mm
- High Power handling
- High rejection
- Ceramic construction



Generic photo used for illustration purposes only
CASE STYLE: GE0805C-2

Product Overview

The HFCG-1100+ LTCC High Pass Filter is constructed with 11 layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 1400-3900 MHz, these units offer low insertion loss and good rejection.

Key Features

Feature	Advantages
Small Size (2.0 mm x 1.25 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitic.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic High Pass Filter

HFCG-1100+

50Ω 1400 to 3900 MHz



Generic photo used for illustration purposes only
CASE STYLE: GE0805C-2

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Features

- Small size
- 7 sections
- Temperature stable
- Excellent power handling, 4W

Applications

- Transmitters / Receivers
- Global positioning system(GPS)
- Satellite broadcast applications


Electrical Specifications^{1,2} at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC-530	40	53	-	dB
		DC-F2	DC-700	20	30	-	dB
	Freq. Cut-Off	F3 *	1050	-	3.0	-	dB
Pass Band	Insertion Loss	F4-F7	1400-3900	-	1.6	2.5	dB
		F5-F6	1500-3200	-	1.2	2	dB
	Return Loss	F4-F6	1400-3200	-	13	-	dB

¹ This component is not intended to act as a DC block. Please consult with Mini-Circuits for further details
² Measured on Mini-Circuits Characterization Test Board TB-1090+

* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

Functional Schematic

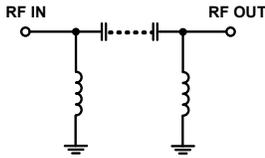

Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	4W at 25°C

*Passband rating, derate linearly to 0.8W at 125°C ambient
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	81.85	0.21
100	67.38	0.24
250	58.76	0.31
530	53.61	0.45
700	31.04	0.61
710	30.07	0.63
750	26.27	0.69
810	20.86	0.84
900	13.06	1.42
970	7.44	2.91
1040	3.33	7.51
1050	2.96	8.65
1100	1.78	17.21
1400	0.97	14.36
1500	0.78	18.13
2000	0.53	17.67
2500	0.44	18.98
3000	0.37	25.57
3200	0.42	18.07
3900	1.10	8.15

Typical Frequency Response

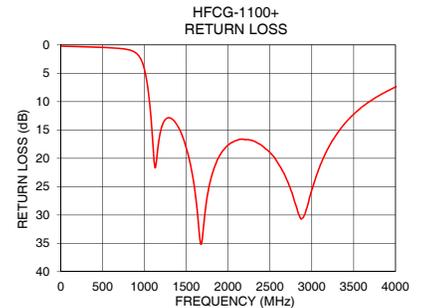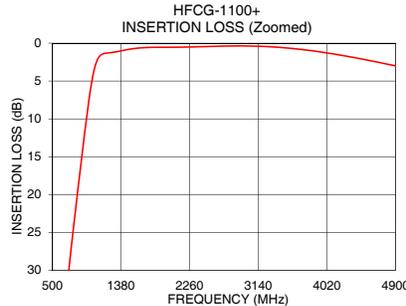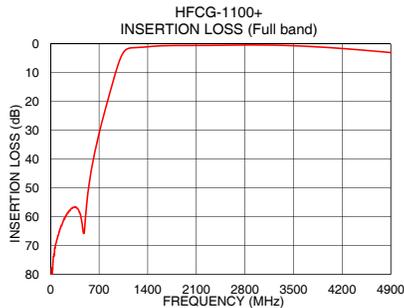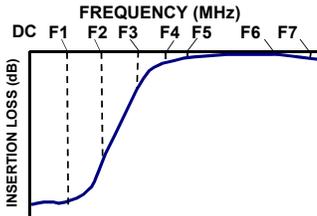

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. A
ECO-012606
HFCG-1100+
EDU3266
URJ
220331
Page 2 of 3

Pad Connections

INPUT	8
OUTPUT	4
GROUND	1,2,3,5,6,7

Product Marking: LB

Demo Board MCL P/N: TB-1090+
Suggested PCB Layout (PL-615)

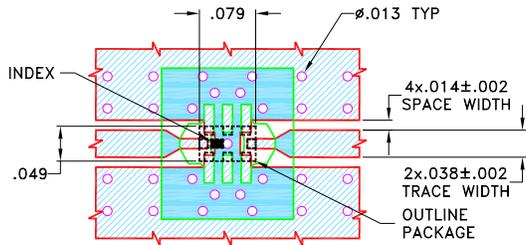


NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

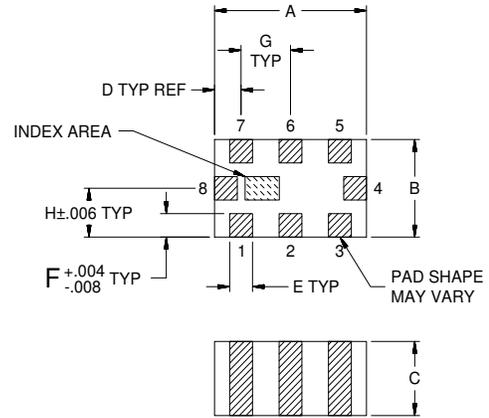

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	Wt.
.079	.049	.037	.014	.012	.012	.026	.025	grams
2.00	1.25	0.95	0.35	0.30	0.30	0.65	0.63	.008

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp