


FERRITE MATERIAL CHARACTERISTICS			
FERRITE MATERIAL DESIGNATION	NOISE SUPPRESSION RANGE	INITIAL PERMEABILITY @ B < 10 gauss	VOLUME RESISTIVITY OHM—CM.
FR1	30 MHz TO 200 MHz	500 то 1500	≥ 10 ⁸

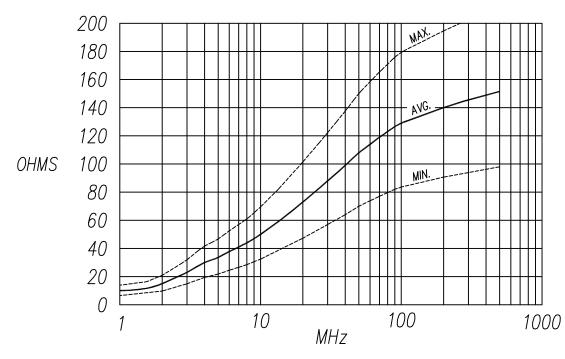

IMPEDANCE CURVE for 7288FR1 INSERT

- AVERAGE IMPEDANCE CURVE

----- MAX. & MIN. IMPEDANCE CURVES


NOTE:

В

MAXIMUM AND MINIMUM IMPEDANCE VALUES ARE DEPENDENT ON:

- 1) HOLE POSITION WITHIN THE INSERT'S GEOMETRY, AND
- 2) FERRITE MATERIAL'S IMPEDANCE VALUE TOLERANCE OF $\pm 25\%$.

THIRD ANGLE PROJECTION





Glen Rock, PA 17327-9199 (717) 235-7512

11118 Susquehanna Trail South

http://www.stewartconnector.com

DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 2 OF 2

RoHS

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE

DATE 2/2/06 APPD BY: DATE 2-3-06 DWG NO. CT720217

AutoCAD

DESIGNATES FERRITE INSERT, DESIGNATES FLANGE OPTION

EIGHT CONTACT, EIGHT POSITION, SHIELDED FILTERED JACK

VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/