

3 dB NF, 10 MHz to 20 GHz, Low Noise Broadband Amplifier with 22 dBm, 15 dB Gain and SMA

FMAM3272 low noise driver amplifier operates across a wide frequency range from 10 MHz to 20 GHz. The design utilizes GaAs PHEMT MMIC technology for high efficiency and high linearity. Typical performance includes 15 dB small signal gain, 3.0 dB noise figure, up to +24 dBm of output power at Psat and +30 dBm output IP3, while using a +12V single DC supply. The design exhibits a very flat gain response across a wide frequency band. Input/output ports are matched for 50 ohms and are DC blocked. The design also incorporates integrated bias sequencing circuitry and voltage regulators to allow for flexible biasing for positive voltage supply.

The drop-in package is hermetically sealed with field replaceable SMA connectors and has an operating temperature range of -55°C to +85°C. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

This broadband low phase noise amplifier module is part of Fairview Microwave's expanding line of amplifier offerings. These modules offer very wide frequency range coverage and outstanding electrical performance in the band.

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Min	Typ	Max	Unit
Frequency Range	0.01		20	GHz
Gain		15		dB
P1dB		+22		dBm
Noise Figure		3		dB
Operating DC Voltage 1		12		Volts
Operating Temperature Range (OTR)	-55		+85	°C



Features:

- LNA Module
- Extremely wide frequency band
- GaAs PHEMT MMIC Technology
- Gain 15 dB
- High Output IP3 +30 dBm
- Output Psat up to +24 dBm typical
- Regulated Supply and Bias Sequencing
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- -55°C to +85°C Operating Temperature

Applications:

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Fiber Optic
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Performance by Frequency

Description	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.010 - 6.0			6.0 - 12.0			12.0 - 20.0			GHz
Gain	14	16		13	15		10	13		dB
Gain Flatness	±0.5			±0.5			±1.0			dB
Gain Variation Over Temperature	0.012	0.02		0.012	0.02		0.012	0.02		dB/ °C
Noise Figure	3			3			4			dB
Input Return Loss	19			17			10			dB
Output Return Loss	14			14			10			dB
Output Power For 1 dB Compression (P1dB)	20	23		19	22		17	20		dBm
Saturated Output Power (Psat)	25			24			22			dBm
Output Third Order Intercept (IP3)	33			30			26			dBm
Saturated Output Voltage	10			10			8			Vpk-pk
Group Delay	±3			±3			±3			ps
Spurious Response	-50			-60			-60			dBc
Supply Current	195			195			195			mA

Mechanical Specifications

Size

Length 0.86 in [21.84 mm]
 Width 0.7 in [17.78 mm]
 Height 0.29 in [7.37 mm]

Connector Option
 Input Connector
 Output Connector

Field Replaceable
 SMA Female
 SMA Female

Environmental Specifications

Temperature

Operating Range -55 to +85 deg C
 Storage Range -65 to +150 deg C

Temperature Cycling
 Hermetic Seal

MIL-STD-883, Method 101C, Cond B
 Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10-8 atm cc

ESD Sensitivity

ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.FairviewMicrowave.com for current document)


RoHS Compliant Yes

Plotted and Other Data

Notes:


- Values at 25 °C, sea level

Functional Block Diagram

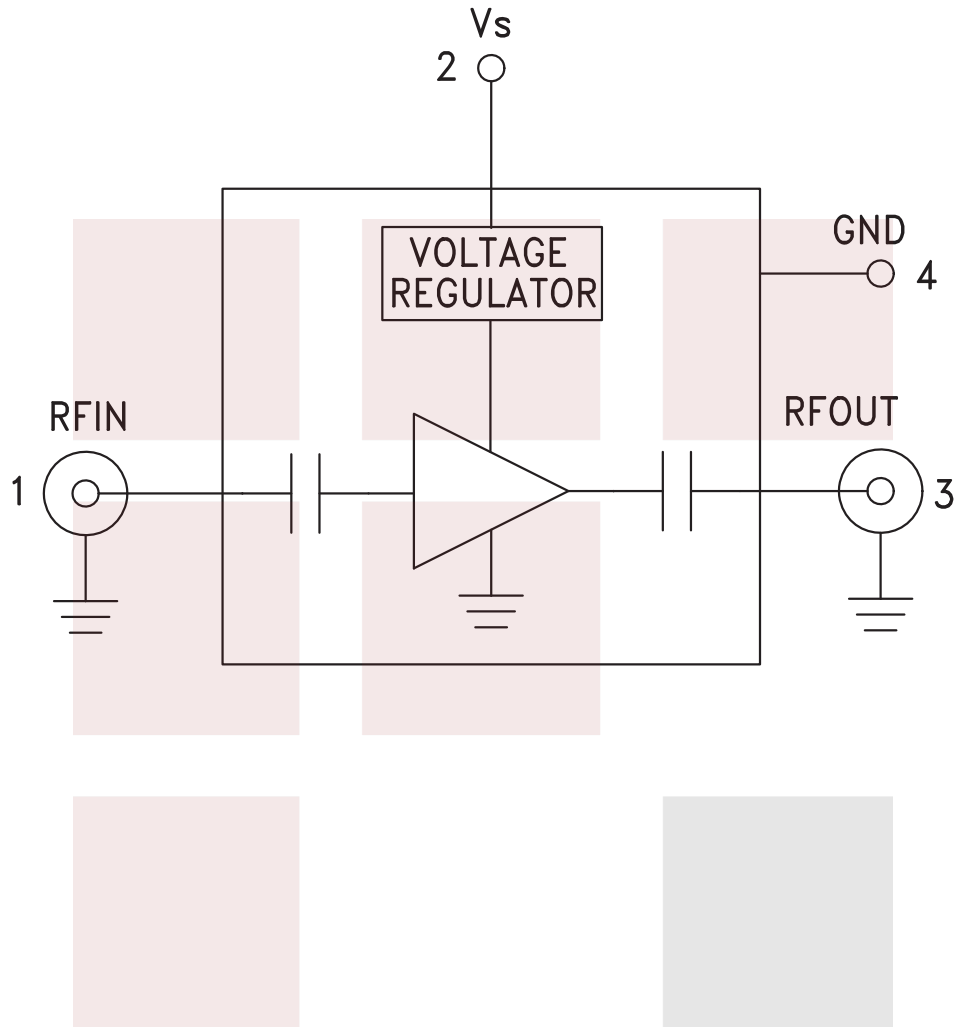


Typical Performance Data


Gain & Return Loss

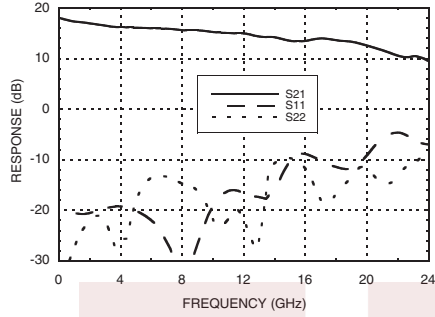


Gain vs. Temperature

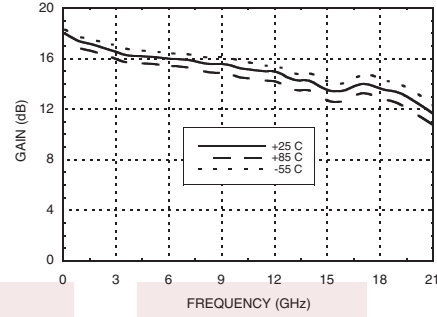


Input Return Loss vs. Temperature

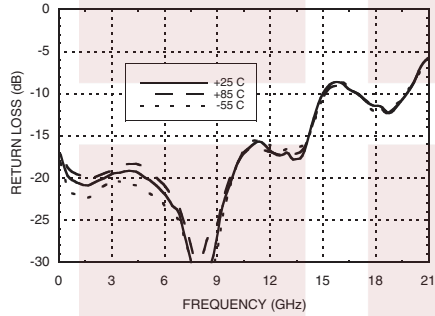


Output Return Loss vs. Temperature

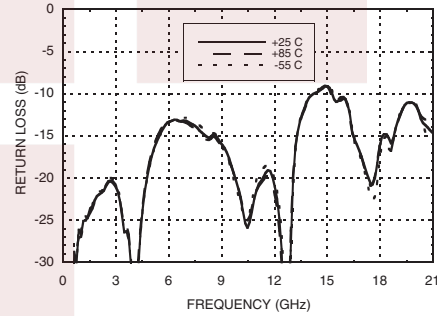


Reverse Isolation vs. Temperature

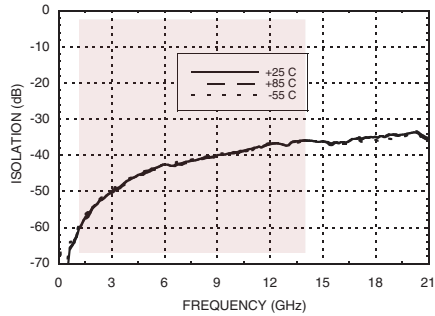


Noise Figure vs. Temperature

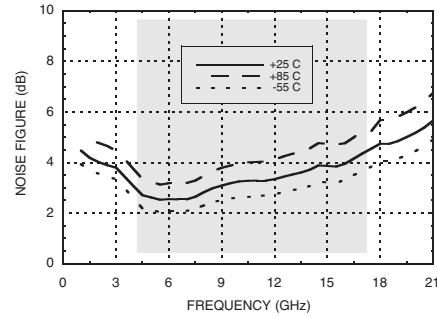


P1dB vs. Temperature

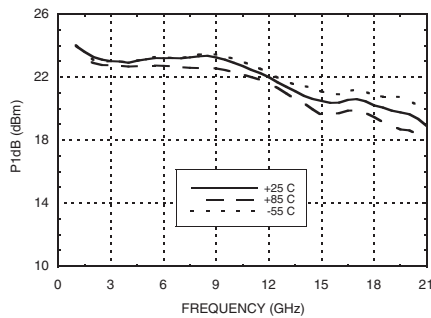


Psat vs. Temperature

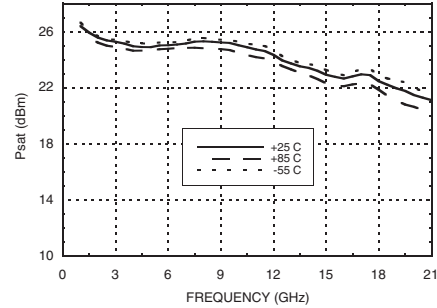


Output IP3 vs. Temperature

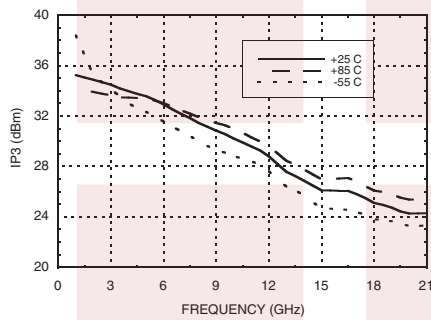


Group Delay

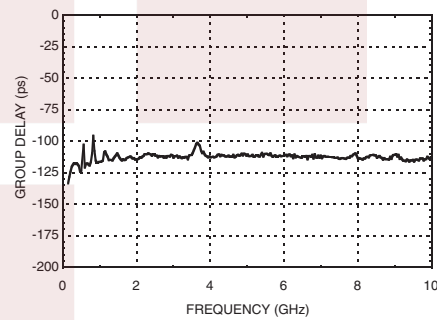

Deviation from Linear Phase

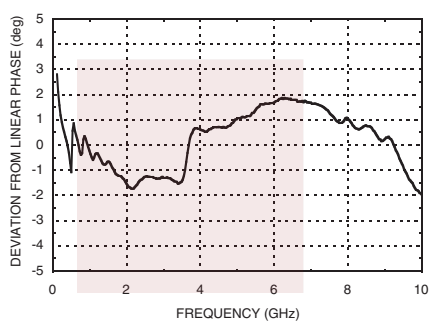

Low Frequency Gain and Return Loss

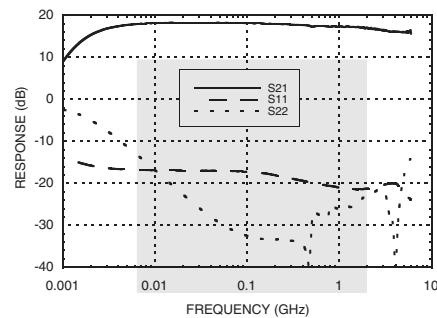


3 dB NF, 10 MHz to 20 GHz, Low Noise Broadband Amplifier with 22 dBm, 15 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [3 dB NF, 10 MHz to 20 GHz, Low Noise Broadband Amplifier with 22 dBm, 15 dB Gain and SMA FMAM3272](https://www.fairviewmicrowave.com/10-mhz-20-ghz-low-noise-broadband-amplifier-fmam3272-p.aspx)

URL: <https://www.fairviewmicrowave.com/10-mhz-20-ghz-low-noise-broadband-amplifier-fmam3272-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

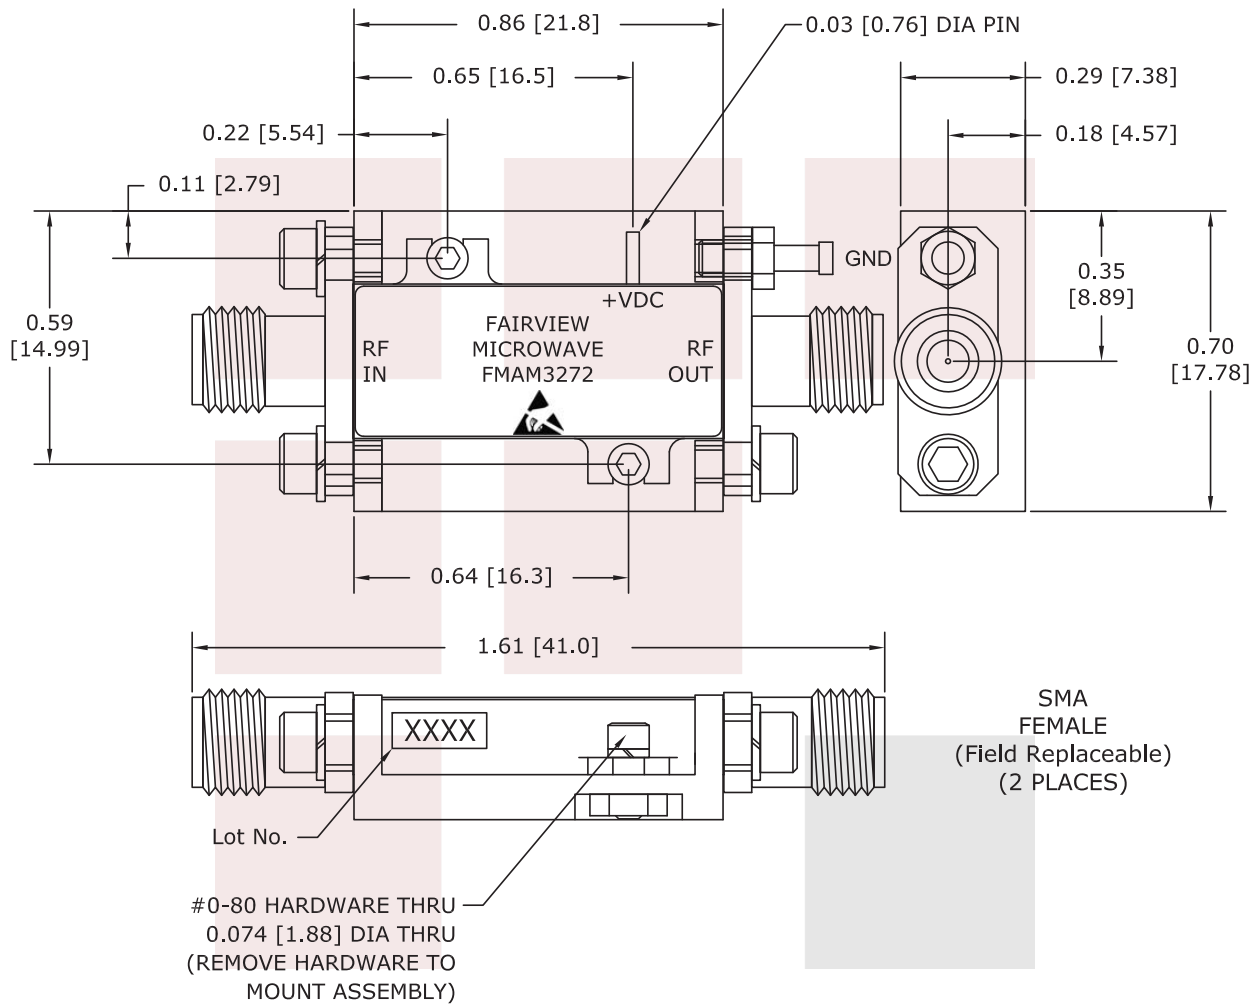

NOTE:
 HEAT SINK REQUIRED FOR PROPER OPERATION,
 UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 3 dB NF, 10 MHz to 20 GHz, Low Noise Broadband Amplifier with 22 dBm, 15 dB Gain and SMA		DWG NO FMAM3272		CAGE CODE 3FKR5	
CAD FILE	071916	SHEET	SCALE	N/A	SIZE A 2233