
** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| SIZE | PART NO. | REV. | ~

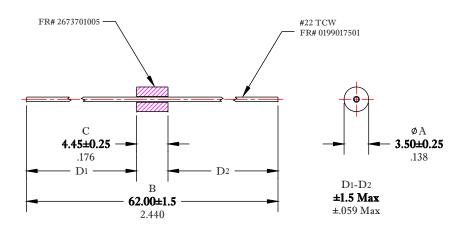

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)						
10 MHz	25 MHz					
38 Min.	48.8 Min.					

DIMENSIONS BOLD NUMBERS ARE IN MILLIMETERS

LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 IMPEDANCE MEASURED ON A HP4193A, USING AN 04193-87001 PROBE KIT WITH A WIRE LENGTH OF **25.4mm** [1"].
- 3 PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

FA	4IR-F	RITE	: F	PRO	DU	ICTS	COF	RP.	
BEAD-ON-LEAD ASSEMBLY									
DRAWN BY D. FOOTE	DATE 12/31/2019							REV.	
CHKD BY		В	2773001112					\sim	
APPRVD BY		SCAI	F٠	NON	F	SHEE	T 1 0	F 1	

FR# 73