



### Electrical specifications

**Center frequency:** 5510 MHz  
**Passband bandwidth:** 20 MHz  
**Insertion loss over PB:** 1.75 dB max over PB  
**IL Variation:** 0.75 dB over PB  
**Rejection 1:** DC-(CF-20)MHz, 20 dBc min  
**Rejection 2:** (CF+20)MHz-6200 MHz, 20 dBc min  
**Group delay variation:** 4 ns over any 0.5 MHz In PB  
**Impedance:** 50 Ohms In/Out  
**Power:** 1 Watt


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N Female  
**Dimensions:** 3.28" X 3.28" X 1.34" in

### Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 Hz

### Outline Drawing:

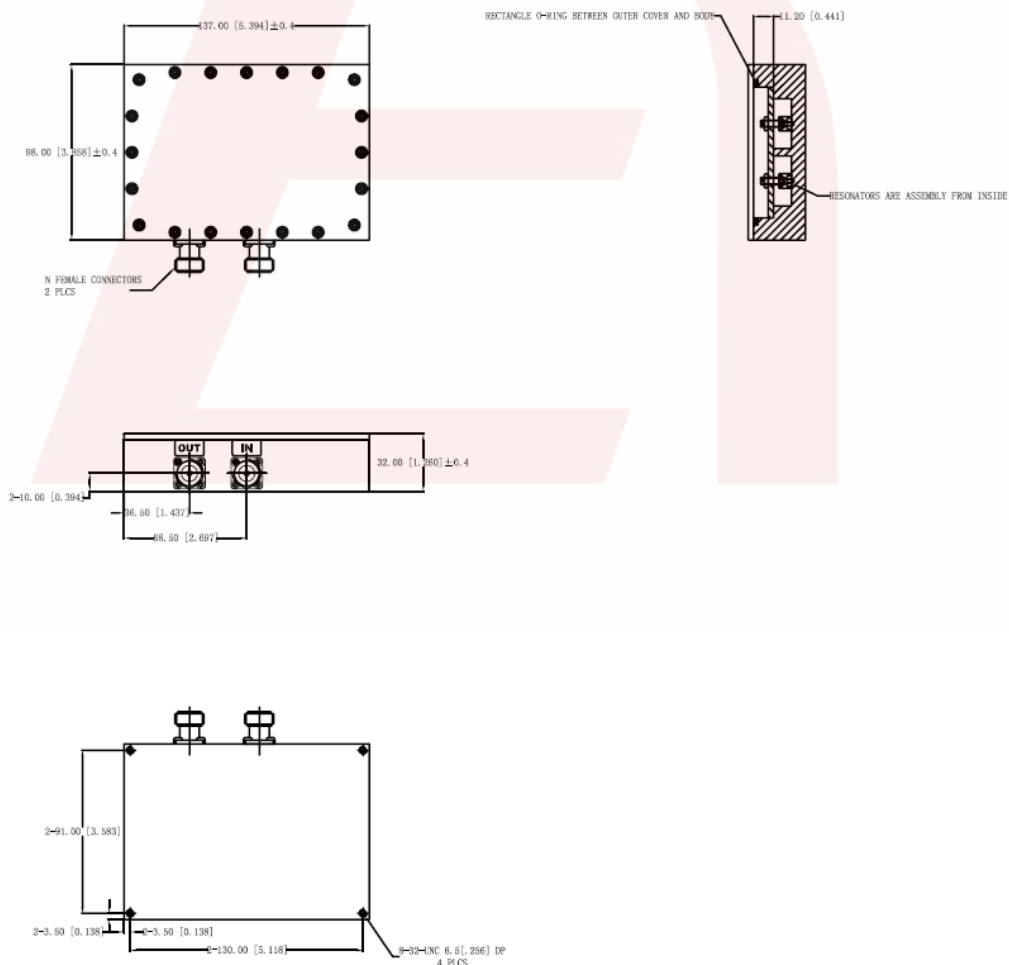

DS-B563-03152018-Rev0




**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 5510 MHz WiFi Cavity Filter

Part Number: AB5510B563



## Plot:

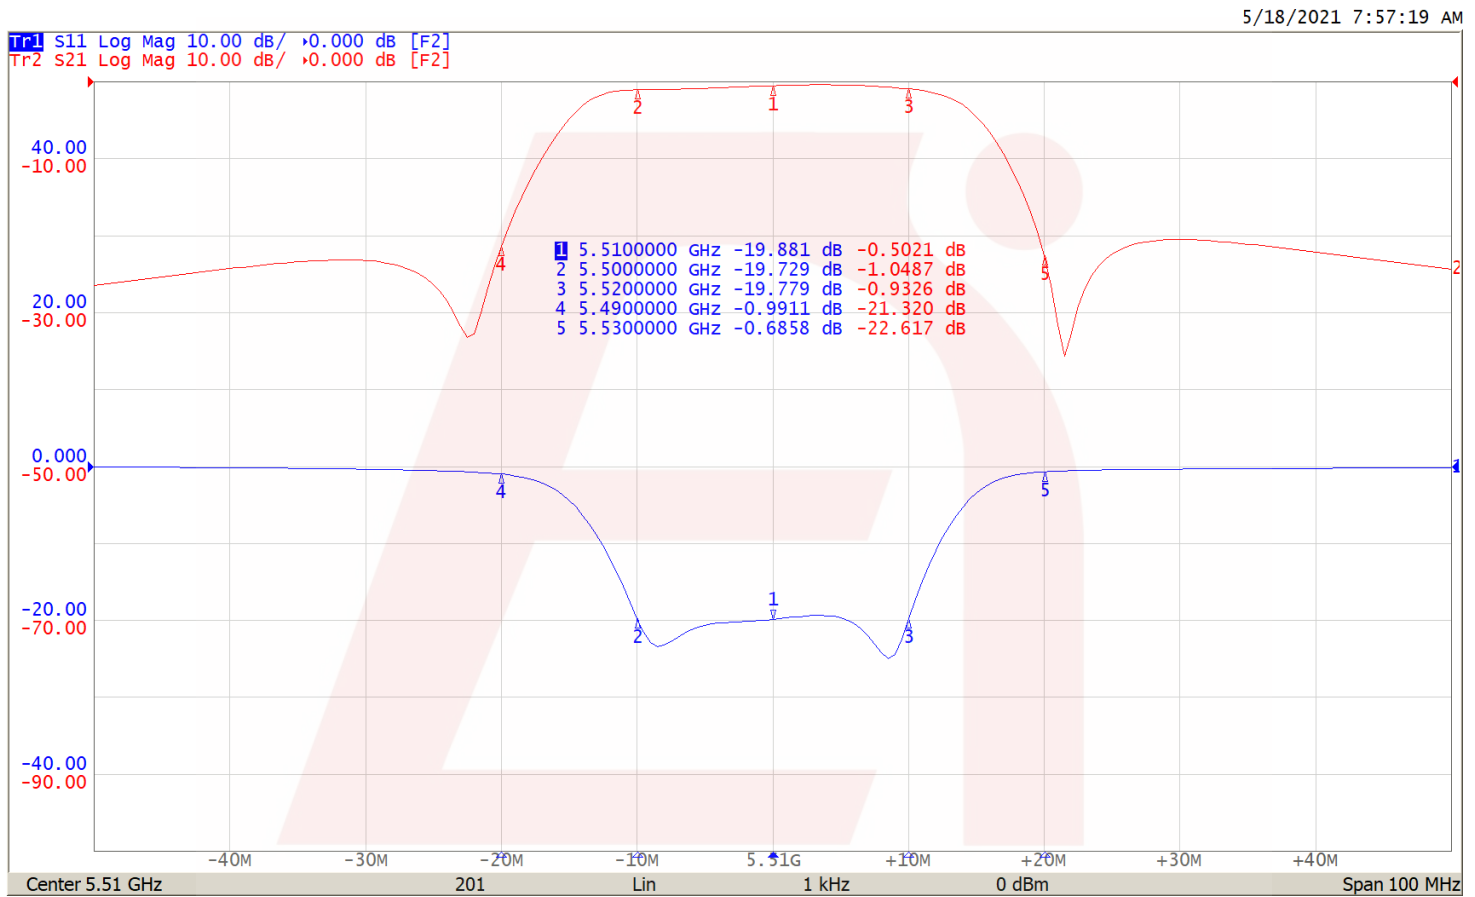

DS-B563-03152018-Rev0